




Features

- Seamless COB design eliminates all LED dotting
- 2700K, 3000K, and 4000K Color temperatures
- Excellent color rendering (90+ CRI)
- From 369-460 lumens per foot performance
- Cuttable every 1.97" consuming 4.5W per foot
- 16.4 feet max run
- Only available in (IP20) uncoated version
- Dimmable (5-100%) with most ELV, TRIAC dimmers
- cULus Listed for indoor dry (IP20) or wet (IP65) locations
- 50,000 hours rated life

Available CCT

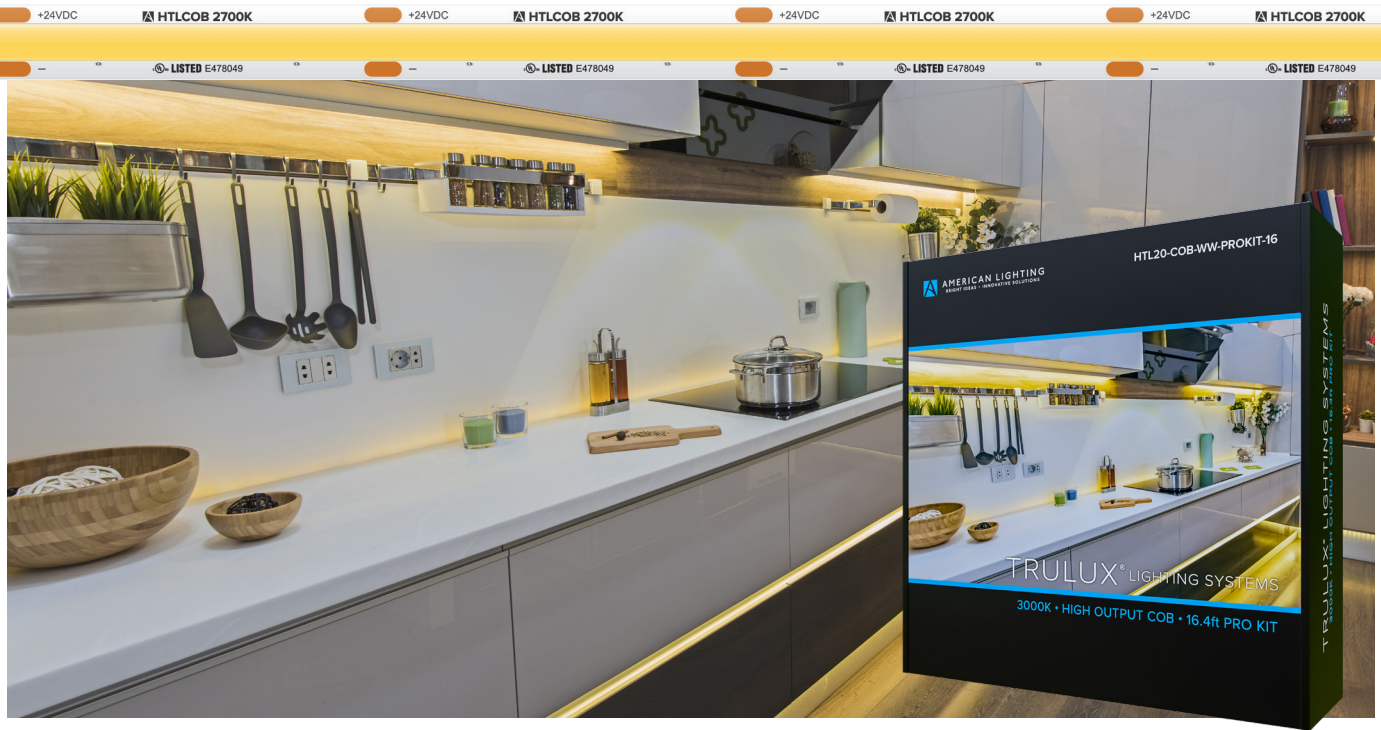

Control Options

- Primary Side Dimming
- Single Color Controls
- Spektrum+™ Smart Receiver (App Controlled)
- Single Color In-line Controller

Listing / Ratings




TRULUX™ High Output COB Pro Kit

The High Output COB kit provides all the components needed to build a complete tape light system. As a premium tape light, COB offers constant illumination along every run. A diffuser is not necessary as the design of COB eliminates all dotting. The low profile also allows for installation in limited space applications.

Technical Information

Series	HTLCOB
Input Voltage	24V DC
CCT	2700K 3000K 4000K
CRI	90+
Wattage	Up to 4.5W per foot
Lumens	Up to 460Lm per foot
Max Run	16.4ft
Cuttable	Every 1.97in (50mm)
IP Rating	IP20 - Uncoated
Dimmable	TRIAC ELV (5-100%)
Rating	cULus Listed
Rated Life	50,000 hrs





COB SERIES ORDERING INFORMATION

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
HTL20-COB-UWW-PROKIT-16	24V DC	2700K	16.4ft	369Lm/ft	4.5W/ft	IP20	90+	1.97" (50mm)
HTL20-COB-WW-PROKIT-16	24V DC	3000K	16.4ft	409Lm/ft	4.5W/ft	IP20	90+	1.97" (50mm)
HTL20-COB-WH-PROKIT-16	24V DC	4000K	16.4ft	460Lm/ft	4.5W/ft	IP20	90+	1.97" (50mm)

HTL20-COB (IP20) PRO Kit includes: (1) 16.4ft (5M) High Output COB Tape Light | (1) 24V 4A Hardwire Power Supply (ADPT-DRJ-96-24) | (1) 15ft (20/2) Wire Spool | (10) HD Tape-to-Wire Connectors | (3) HD Tape-to-Tape Connectors

SINGLE COLOR ACCESSORIES


ITEM NUMBER	DESCRIPTION
TL-CONKIT	6' Trulink 4-in-1 Connection Kit
TL-BLKS	Trulink 4-in-1 Connector Block (QTY 10)
TL-2PWR-HD	6' HD Power Feed
TL-2JUMP6-HD	6" HD Linking Cable
TL-2JUMP24-HD	24" HD Linking Cable
TL-2SPL-HD	HD Tape to Tape Splice Connector
TL-2SPL-L-HD	90° "L" HD Tape to Tape Splice Connector
WIRE-15-2PIN	15ft (20/2) Wire Spool
WIRE-CMP-100-3PIN	100' (16/3) In-wall Rated Wire Spool
INLINE-SC-CTRL	Simple Select In-line Controller (Single Color)
SPKPL-REC-TB-5CH	Spektrum™ Smart Receiver (App Controlled)
LVSB-2PIN	2pin Low-Voltage Terminal Block
RCWY-PVC-1M	1m Plastic Wire Cover Raceway



Building a Single Color Trulux™ System?

See pages (89-90) for compatible single color controllers & accessories

Primary Side Dimming Set-up



Standard Dimmer



Adaptive Series Power Supply
(30W | 60W | 96W | 192W | 288W)



Trulux™ Tape Light