




## Features

- Excellent color rendering (94-96+ CRI)
- Color temperatures from 2400K to 4000K
- 100-155 lumens per foot performance
- Consumes only 2.19 watts per foot
- Dimmable with most ELV dimmers
- Cuttable every 6.56" (24V) and 3.94" (12V)
- 32.8 ft (24V) / 27 ft (12V) max run
- (IP54) unjacketed or (IP65) jacketed versions
- 50,000 hours rated life

## Available CCT



## Control Options

- Primary Side Dimming
- Trulux Single Color Controls
- Spektrum Smart Receiver (App Controlled)
- Single Color In-line Controller

## Listing / Ratings




## TRULUX™ Standard Grade - 24V / 12V

Build an economical and versatile layered lighting system with Trulux Standard Grade tape light. Light output ranging from 140-155 lumens per foot, with easy to work with run lengths up to 32.8 feet, Trulux Standard Grade is perfect for accent lighting applications when soft and subtle lighting is desired.

## Technical Information

Series	STL
Input Voltage	24V / 12V (STL-WW-100-12V only)
CCT	2400K / 2700K / 3000K / 4000K
CRI	94+ (UWX & IP65) / 96+
Wattage	2.19W per ft
Lumens	Up to 155Lm per ft
Max Run	32.8 ft (24V) / 27 ft (12V)
Cuttable	Every 6.56 in (24V) / 3.94 in (12V)
IP Rating	IP54 (unjacketed) / IP65 (jacketed)
Dimmable	5-100%
Rating	cULus Listed
Rated Life	50,000 hrs

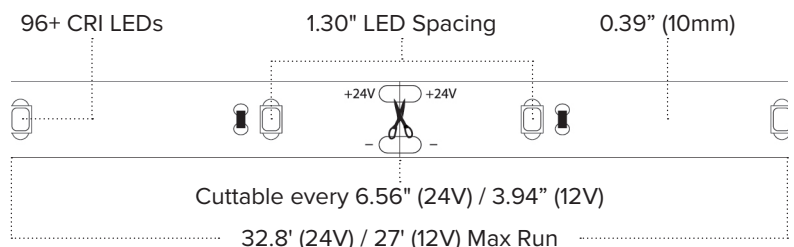

**STL SERIES ORDERING INFORMATION**

\*Custom Cut Orders - Please Allow Up To 2-4 Weeks Order Processing & Delivery\*

ITEM NUMBER	VOLTAGE	CCT	LENGTH	LUMENS / FT	WATTAGE / FT	IP RATING	CRI	CUTTING
STL-UWX	24V	2400K	16.4 ft	140Lm / ft	2.19W / ft	IP54	94+	6.56" (167mm)
STL-UWX-33	24V	2400K	32.8 ft	140Lm / ft	2.19W / ft	IP54	94+	6.56" (167mm)
STL65-UWX	24V	2400K	16.4 ft	100Lm / ft	2.19W / ft	IP65	94+	6.56" (167mm)
STL-UWX-CC	24V	2400K	Custom Cut	140Lm / ft	2.19W / ft	IP54	94+	6.56" (167mm)
STL-UWW	24V	2700K	16.4 ft	146Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)
STL-UWW-33	24V	2700K	32.8 ft	146Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)
STL65-UWW	24V	2700K	16.4 ft	105Lm / ft	2.19W / ft	IP65	94+	6.56" (167mm)
STL-UWW-100	24V	2700K	100 ft	146Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)
STL-UWW-CC	24V	2700K	Custom Cut	146Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)
STL-WW	24V	3000K	16.4 ft	150Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)
STL-WW-33	24V	3000K	32.8 ft	150Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)
STL65-WW	24V	3000K	16.4 ft	115Lm / ft	2.19W / ft	IP65	94+	6.56" (167mm)
STL-WW-100	24V	3000K	100 ft	150Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)
STL-WW-100-12V	12V	3000K	100 ft	150Lm / ft	2.19W / ft	IP54	96+	3.94" (100mm)
STL-WW-CC	24V	3000K	Custom Cut	150Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)
STL-WH	24V	4000K	16.4 ft	155Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)
STL-WH-33	24V	4000K	32.8 ft	155Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)
STL65-WH	24V	4000K	16.4 ft	125Lm / ft	2.19W / ft	IP65	94+	6.56" (167mm)
STL-WH-CC	24V	4000K	Custom Cut	155Lm / ft	2.19W / ft	IP54	96+	6.56" (167mm)


STL (IP54) 16.4ft Reels include: Attached 3ft Lead Wire / (3) TL-CONKIT / (3) TL-BLKS / (3) HD Power Feeds / (3) HD Splice Connectors

STL65 (IP65) 16.4ft Reels include: Attached 3ft IP65 Lead Wire / (3) HD Power Feeds / (3) HD Splice Connectors


STL (IP54) 100ft Reels include: Attached 3ft Lead Wire / (5) TL-CONKIT / (5) TL-BLKS / (5) HD Power Feeds

**SINGLE COLOR ACCESSORIES**

ITEM NUMBER	DESCRIPTION
TL-CONKIT	Trulink 4-in-1 Connection Kit
TL-BLKS	Trulink 4-in-1 Connector Block (QTY 10)
TL-2PWR-HD	6" HD Power Feed
TL-2JUMP6-HD	6" HD Linking Cable
TL-2JUMP24-HD	24" HD Linking Cable
TL-2SPL-HD	HD Tape to Tape Splice Connector
TL-2JUMP65-.5	6" IP65 Linking Cable
TL-2JUMP65-1	12" IP65 Linking Cable
TL-2JUMP65-2	24" IP65 Linking Cable
WIRE-15-2PIN	15ft (20/2) Wire Spool
INLINE-SC-CTRL	Simple Select In-line Controller (Single Color)
SPK-REC-5CH	Spektrum Smart Receiver (App Controlled)
LVS-2PIN	In-line Terminal Block
RCWY-PVC-1M	1m Plastic Wire Cover Raceway

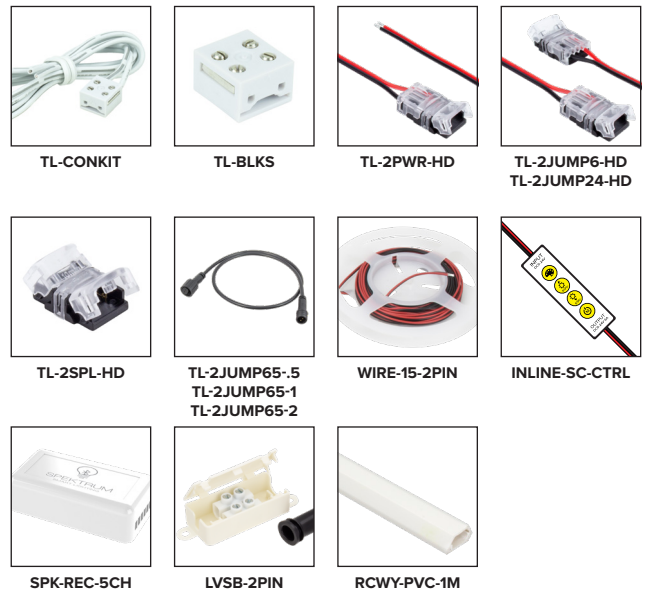

**Primary Side Dimming Set-up**



Standard Dimmer



Adaptive Series Power Supply  
(30W / 60W / 96W / 192W / 288W)



Trulux Tape Light