

# Cord Grips for Service Entrance UF

Size Range: 1/2 - 3/4"

Type UF Underground Feeder Cable Connector

Product Series: CGUF Connectors Specification Grade

Material: Alloy Steel Construction with Zinc Plated with a Chromate Finish


Made in the USA

Industrial SPEC-grade

Full FLAT HEX Surface with EZ Torque Steel Compression Nut & Steel Compression Ring  
Torques Tight & Right



Low Profile Design to Accomodate Newer and Smaller UF Cables and Traditional UF Sized.

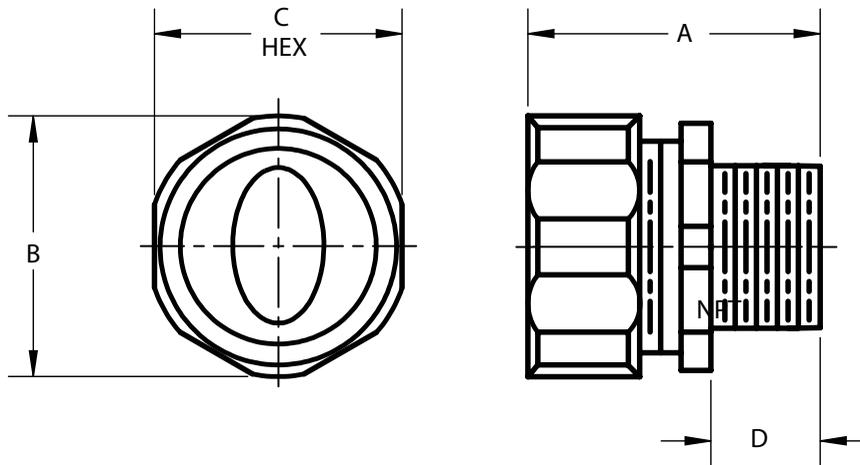

Options: Available Sealing Washer & Locknut



For Securing A and Sealing Service Entrance and UF, SE, SEU Cable Entering an Enclosure or Conduit Hub.

Cat #	Trade Size	A Lgth	B Dia	C Hex	D Thread Lgth	Type UF Cable Range
UF50	1/2	1 5/16	1 3/32	1 1/32	1/2	14-2, 12-2 W and WO Ground
UF5075	3/4	1 5/16	1 3/32	1 1/32	17/32	14-2, 12-2 W and WO Ground
UF75	3/4	1 3/8	1 3/32	2 1/32	17/32	14-3, 12-3, 10-3 W and WO Ground

**Compliances:**

Certified Made in the USA

UL 514B

NEMA Standard FB1 Rated NEMA 4x Liquid Tight NPT Threads

Federal Standard A-A-50553

CSA Standard: C22.2 No. 18F

RoHS and REACH Compliant

CA Prop 65 Compliant

UNSPC 39121431



**Features:**

Precision Machined Cut NPT Threads

NPT Tapered Hub for Liquid Tight Connection with NPT Female

Neoprene Grommet Provides Liquid Tight Entry and Protects Oil and Other Contaminants

Solid Steel Retainer Ring Safe Guards Cable Compresses Grommet for Non-Abrasive Wear on Cable

Twice the Strength & Corrosion Resistance Over Die-Cast Fittings