Fixture Hanger Bracket and Accessories

UNILETS® for use with Threaded Metal Conduit.

NPT Size (Inches)	Support Weight (lbs/kg)	Catalog Number
iti i oize (iliciics)	ouppoit weight (ibs/kg)	oatalog Hullibel

Fixture Hanger Brackets




Suitable for use with fixtures with 3/4-14 NPT conduit openings or hubs. Mounts directly to ceiling or wall separately from conduit system. Catalog number includes two brackets and two hexhead bolts. Iron with gray epoxy finish.

3/4


200/90.0

FHS₁



Ceiling Mount

Projects light downward (90°). Shown mounted to Appleton AH260-118 explosionproof fluorescent lighting fixture.



Wall Mount

Projects light at 45° angle. Shown mounted to Appleton AH260-118 explosionproof fluorescent lighting fixture.

Safety Support Hooks and Rigid Support for Dummy Side of Lighting Fixtures



Complete assembly includes two hooks and one rigid support. Each hook supplied with a screw for closing 3/8" jaw opening. Rigid Support straddles max. 1-1/4" conduit. (Chain shown in installation view not furnished.)

3/4

200/90.0

AC-KT

SLC75

EFHM-50

EFHM-75

LC Steel Locking Couplings





Setscrews with Allen head fasten on outside of hub and fixture stem. Prevents fixture stem from turning in hubs not normally supplied with setscrews. 3/4" fixture stem.

3/4

1 SLC1075

Safety Support Hooks for Dummy Side of Lighting Fixtures

Supplied with screw for closing 3/8" jaw opening.







Male 1/2 3/4 **Female**

200/90.0

200/90.0 EFHF-50 EFHF-75

Rigid Support for Fluorescent Lighting Fixtures (Dummy Side)



Will straddle max. 1-1/4" conduit.

1/2

3/4


1/2 and 3/4

350/157.5

FHS5075

Fixture Hanger Bracket and AccessoriesUNILETS® for use with Threaded Metal Conduit.

Dimensions of FHS1 Fixture Hanger Bracket

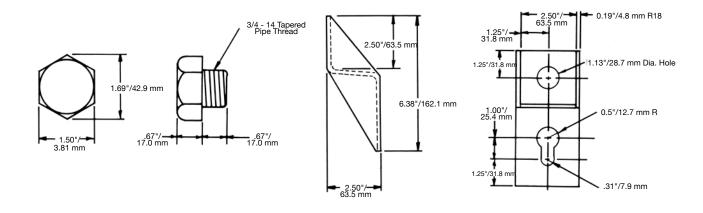

1435