

IJL LED SERIES LUMAIRES ORDINARY LOCATION

FEATURES

- Compact, lightweight, flexible field selectable technology.
 - Two field selectable light outputs (stepped dimming via connector) provide up to 5000 lumens:
- | Nominal Lumens | Incandescent Equivalent | Model |
|----------------|-------------------------|-------------|
| 1000 or 2000 | 60-150W | IJLLED1QZBU |
| 3500 or 5000 | 200-300W | IJLLED5QZBU |
- 3000K/4000K/5000K CCT field selectable (70 CRI min).
 - All-in-One pendant, ceiling or wall mount
 - For wall mount: 0 to 90 degrees adjustable with a lock in mechanism
 - Five 3/4" NPT knockouts/hubs available for pipe or conduit mounting
 - Lightweight: 2.3 to 3.1 (5.08 to 6.84 lbs).
 - Ambient Temperature: -40 °C to +55 °C (-40 °F to +131 °F)
 - Universal Voltage: 120-277 Vac, 50/60 Hz
 - Standard 6 kV surge suppression
 - Photometric data and electronic drawing available upon request
 - LED L70 reported 60,000 hours

WARRANTY

- 5 year standard warranty

TYPICAL APPLICATIONS

- Enclosed and gasketed LED fixtures with field selectable technology for a wide range of industrial areas where typical industries include:
 - Steel Production Facilities
 - Foundries
 - Wastewater Treatment Plants
 - Pulp and Paper mills
 - Other areas where corrosive, wet, dirty and tough environments are a problems
- Typical applications include:
 - Stairwells
 - Elevator pits
 - Eye wash and first aid stations
 - Emergency call stations
 - Exits, doorway lighting
 - Garages and storage areas
 - Outdoor walkways
 - Docks

LUMINAIRE MATERIALS

- Mounting hood housing: cast copperfree (4/10 of 1% max.) aluminum
- Fixture housing: cast copperfree (4/10 of 1% max.) aluminum
- Gaskets: silicone rubber
- All hardware and catch assemblies: stainless steel
- Globe: polycarbonate
- Globe guard: stainless steel



IJLLED1QZBU



IJLLED5QZBU

ACCESSORIES (PURCHASE SEPARATELY)

- All models;
 - Globe guard available purchase separately
 - Colored polycarbonate globes available, purchase separately

NEC/CEC LISTINGS

- UL Standards: UL 1598, UL 50E, UL1598A, UL 8750
- CSA Standards: C22.2 No. 250.0; C22.2 No. 250.13; C22.2 No. 94.2; C22.2 No. 0; C22.2 No. 60529
- cETLus Certificate: 105615110CHI-001

For warranty details go to www.appleton.emerson.com

PRODUCT SPECIFICATIONS

Series Lumen Output	IJLLED1QZBU	IJLLED5QZBU
Nominal Wattage (W, @120 V)	7 or 15	27 or 38
Nominal Lumens Output	1000 or 2000	3500 or 5000
Efficacy (up to, lm/W) @ 5000K Lowest Lumen Setting	149 or 132	141 or 131
Color Temperature (CCT) (K)	3000, 4000, or 5000	
Color Rendering Index (CRI)	>70	
Voltage	120-277 Vac, 50/60 Hz	
Surge Protection	6kV	
L70 Lifetime (hrs, reported)	60,000 hours	
Ambient Temperature	-40 °C to +55 °C (-40 °F to +131 °F).	
Temperature Code	Ta = +55 °C (+131 °F)	Ta = +40 °C (+104 °F)
Fixture Weight - kg (lbs)	2.30 (5.08)	3.10 (6.84)
Replaceable Parts	IJLLED1QZBU (Low lumen replacement fixture)	IJLLED5QZBU (High lumen replacement fixture)

APPLETON

For product information:
www.masteringled.com
1.800.621.1506


EMERSON

IJL LED SERIES LUMAIRES

ORDINARY LOCATION

Project Information

Part Number: _____ Date: _____
 Project: _____
 Fixture Type: _____

Specifications

CATALOG NUMBERING GUIDE | IJL LED SERIES LUMAIRES

Series Prefix	Lumen Level (nominal)	Color Temperature (CCT)	Voltage
IJLLED			

SERIES PREFIX:

IJLLED IJL LED Series

LUMEN (NOMINAL):

1Q 1000K or 2000K

5Q 3500K or 5000K



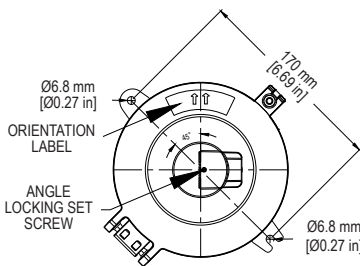
COLOR TEMPERATURE (CCT):

Z 3000K or 4000K or 5000K

VOLTAGE:

BU 120-277 Vac, 50/60 Hz

DIMENSIONAL DRAWINGS | MILLIMETERS (INCHES)

IJLLED1QZBU	IJLLED5QZBU	Complete Assembly
		

APPLETON™

United States: 1.800.621.1506 | Asia/Pacific: + 65.6556.1100 | Australia: + 61.3.9721.0387
 Canada: + 1.888.765.2226 | China: + 86.21.3338.7000 | Europe: + 33.3.22.54.13.90
 Mexico/Latin America: + 52.55.5809.5049 | Middle East/Africa/India: + 971.4.811.8100
www.masteringled.com


EMERSON™

Appleton Grp LLC d/b/a Appleton Group. The Appleton and Emerson logos are registered in the U.S. Patent and Trademark Office.
 All other product or service names are the property of their registered owners. © October 2024, Appleton Grp LLC. All rights reserved.