

“TCC” Single and “TCCD” Double Conduit Cable Tray Clamps

Application

- For supporting rigid conduit to cable tray flange at each location where tray cable exits the tray and is run through rigid conduit raceway to control panel boards, motor starters and other electrical devices.

Features

- Clamps mount on all types of tray configurations (inside, outside or double flange).
- Exclusive design provides full 360° swivel, allowing exit conduit positioning at any angle, eliminating the need for separate inside or outside flange clamps, and field modification.
- Unique clamp mounting provides greater cable capacity and working area within the tray by reducing internal clamp obstruction.
- Type TCCD feature exclusive double conduit clamps conserve to space where multiple cables exit the tray at one location.
- Only four clamps are necessary to handle a conduit range from 1/2” thru 4”.
- Fewer catalog numbers reduce jobsite inventory.

Material/Finish

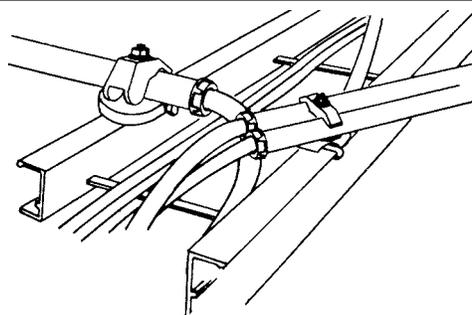
- Base and conduit clamp: malleable iron, hot dip galvanized
- Nuts, bolts and other hardware: steel, mechanically galvanized
- Cable tray grounding clamp: aluminum

Certifications and Compliances



- UL Standard: 467
- UL Listed: E6581



TCC250300G



In Use

	Catalog Number	Rigid Size (Inches)	Wt. Lbs./Kgs. Per 100
TCC for Single Line Conduit—Hot Dip/Mechanically Galvanized			
	TCC-50100G	1/2, 3/4, 1	100.00/45.40
	TCC-125200G	1-1/4, 1-1/2, 2	231.30/104.90
	TCC-250300G	2-1/2, 3	446.90/202.70
	TCC-350400G	3-1/2, 4	449.10/203.70
TCCD for Double Line Conduit—Hot Dip/Mechanically Galvanized			
	TCCD-50100G	1/2, 3/4, 1	90.70/41.10
	TCCD-125200G	1-1/4, 1-1/2, 2	200.00/90.70
Cable Tray Grounding Conductor Clamp—Aluminum			
	TCGC	For #6 to 2/0 wire size	18.80/8.50