
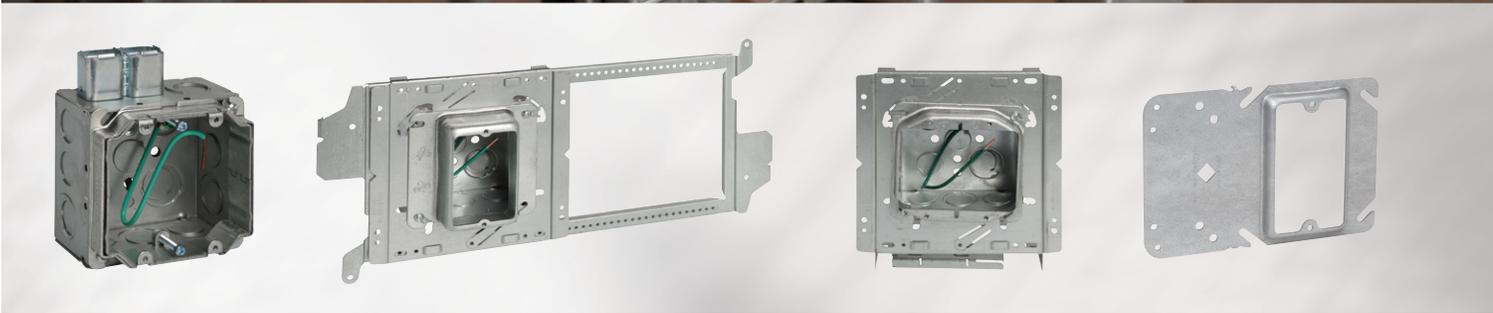


CROUSE-HINDS  
SERIES

B-LINE  
SERIES

# Ruff-IN pre-fabricated solutions

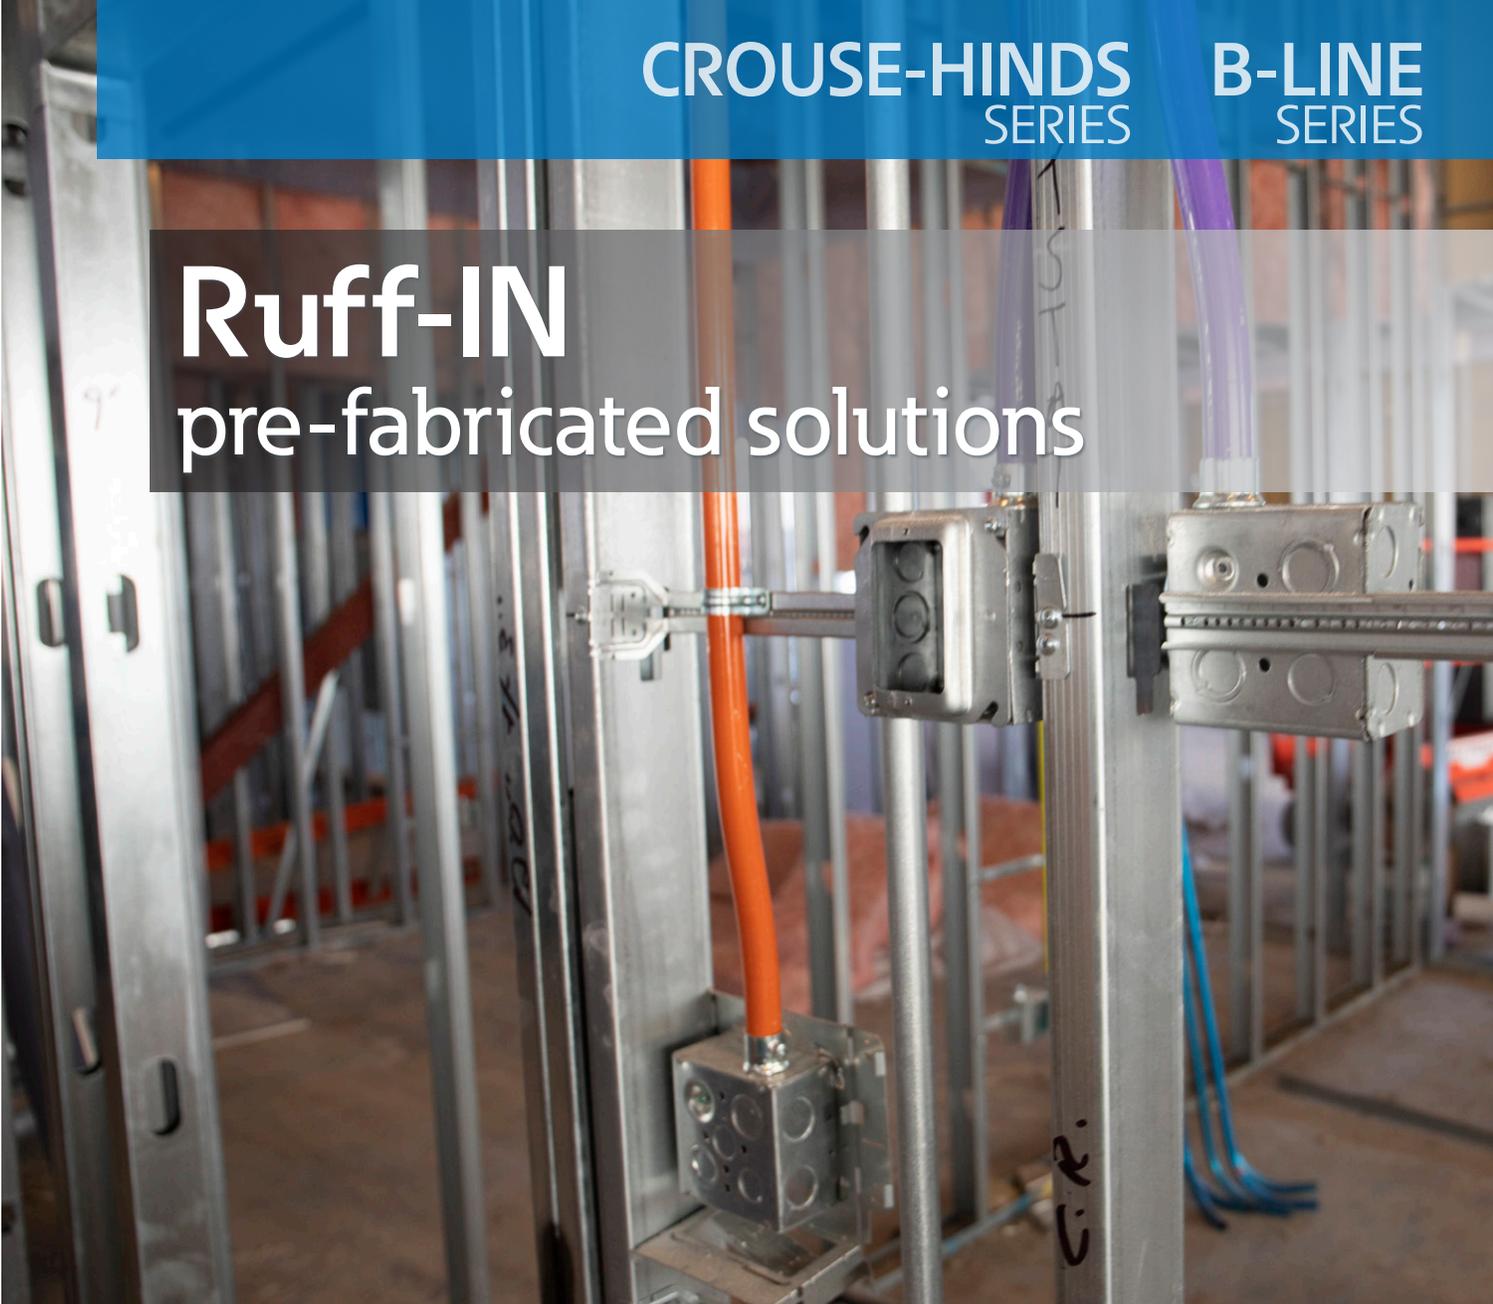

**EATON**

*Powering Business Worldwide*

Ruff-IN™ prefabricated electrical assemblies are backed by a full commercial product offering designed for **dependable performance & productivity.**




The portfolio delivers the quality and breadth of offering in styles and materials to meet customer requirements and preferences. With industry-leading innovation, our products deliver real customer value.



**Outlet Boxes & Covers**



**Electrical Fittings**

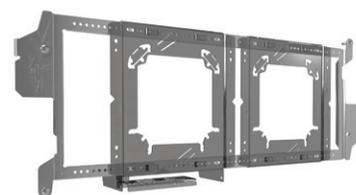

**Fasteners & Supports**



**NOTICE**

Eaton reserves the right to change the specifications, materials, equipment, prices or the availability of products at any time without prior notice. While every effort has been made to assure the accuracy of information contained in this catalog at the time of publication, we are not responsible for inaccuracies resulting from undetected errors or omissions.

# Ruff-IN pre-fabricated solutions catalog

## Table of contents

<b>Ruff-IN overview</b> .....	<b>4</b>
<b>Ruff-IN portfolio overview</b> .....	<b>5</b>
<b>Ruff-IN Made-to-Stock — Standard assemblies</b> .....	<b>6</b>
<b>Ruff-IN Made-to-Order — Configured assemblies</b> .....	<b>7</b>
<b>Ruff-IN Engineered-to-Order — Fully engineered solutions</b> .....	<b>8 - 9</b>
<b>Ruff-in solution overview</b> .....	<b>10 - 13</b>
<b>Ruff-IN product components</b> .....	<b>14 - 33</b>
BBA box mounting brackets .....	14
Hands-free telescoping brackets .....	15
Telescoping brackets and mounting clips .....	16
Multiple box and open box mounting brackets .....	17
Single sided and double sided box support brackets .....	18 - 19
Floor mount box support brackets .....	20 - 21
Ceiling hangers .....	22
Quick-Lok outlet boxes .....	22
TP4, TP5 outlet boxes and Uni-Mount covers .....	23
Mud rings .....	24
Metal protector plates .....	25
Wiring devices .....	25
Concrete box clamp/cable support .....	26-27
Catalog numbering trees .....	28-29
Components listings .....	30-33

# Industry challenges impact your bottom line

## Demands of electrical contractors are at an all-time high.

Incredibly tight budgets paired with scope creep, digital deliverables, and green building initiatives like waste reduction create unique opportunities and challenges for nearly every project.

Pairing these challenges with a shrinking workforce and expedited construction schedules requires contractors to optimize labor in new ways.

## Productivity challenges hit hardest at rough-in.


Inefficient material management and slow installation when working in ceilings and walls is costly.

**Contractors need efficiency and consistency to get it done right and quickly. Eaton is here to help.**



## Introducing Ruff-IN solutions

- Ruff-IN is our extensive portfolio of innovative, pre-fabricated in-wall and overhead electrical assemblies
- Our Ruff-IN pre-fab solutions save on time and help reduce costs for a healthier bottom line
- Ruff-IN supports your needs for standardization, installation speed and optimization of your work force

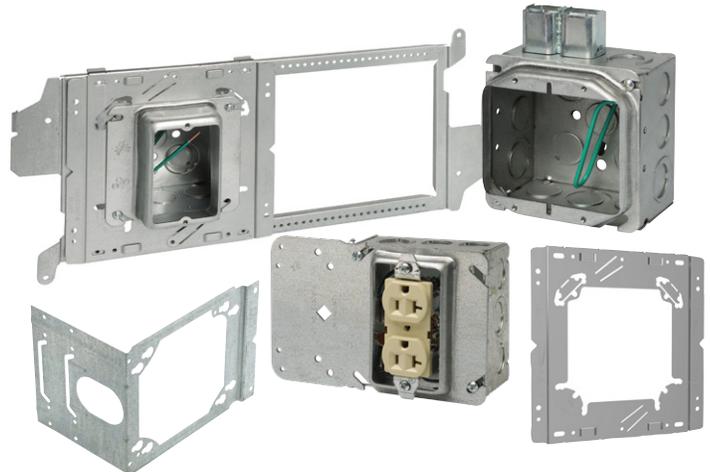

**Turn rough-in into a win!**

- **Reduce material management**
- **Speed up installation**
- **Optimize skilled labor**

# Ruff-IN your way!

Ruff-IN is available in multiple tiers, from simple assemblies to a complete engineered solution for a project. Choose the Ruff-IN solution below that best fits your needs, job-by-job or driving towards a standard solution. Contact our team for guidance toward the solution that best fits your project.

## 1. Ruff-IN Made-to-Stock - standard assemblies

- Our most common and popular pre-fab assemblies
- Helps reduce material management costs and eliminate assembly for all your work
- Factory assembled and available for immediate shipment from stock

**If you're building assemblies yourself, consider our pre-fab optimized components like Quick-Lok™ and BBT series brackets.**



## 2. Ruff-IN Made-to-Order - configured assemblies

- Configured according to your specific project type and schedule, optimizing labor usage and maximizing installation speed
- Assembled from our extensive line of brackets, boxes, plaster rings, wiring devices, push-in connectors, cable leads, and other branch wiring accessories
- When you establish standard assemblies, your MTO assemblies become your standard, and we'll work with distributors to stock them for you



## 3. Ruff-IN Engineered-to-Order - fully engineered solutions

- Complete turnkey solution that begins with a free takeoff based on the construction documents. When a PO is awarded, a complete Revit model will be created to design the pre-fab solution.
- Revit model can be shared to help with trade coordination and serves as owner-as-built drawing once completed.
- Fully engineered to the project requirements using a 15+ year proven system, delivering a fast and consistent installation to optimize labor.
- Ideal for highly repetitive projects like apartments, dormitories and hotels.




# 1. Ruff-IN Made-to-Stock - standard assemblies



TP403PF



TP403G



TP404PF



TP404G



PFTWFA 4Q1075



PFTWFA 4Q10275



PFTWFA 4Q10AR58



PFTWFA 4Q102AR



PFTA4 4Q1075



PFTA4 4Q10275



PFTA4 4Q10AR58




PFTA4 4Q102AR

Catalog #	EAN/UPC code	Description
TP403PF	3078618900028	4" square X 2-1/8" D. box with ground pigtail
TP403G	3078618980403	4" square X 2-1/8" D. box with ground screw installed
TP404PF	3078618900027	4" square X 1-1/2" D. box with ground pigtail
TP404G	3066227901861	4" square X 1-1/2" D. box with ground screw installed
PFTWFA 4Q1075	3066227919215	BBT-WF + BBA - 14.5" - 25" telescoping open bracket w/ alignment plate + TP4Q10PF - 4" SQ. X 2-1/8" D. box with Quick-Lok connector and ground pigtail + TP486 - 3/4" raised single gang
PFTWFA 4Q10275	3066227919216	BBT-WF + BBA - 14.5" - 25" telescoping open bracket w/ alignment plate + TP4Q10PF - 4" SQ. X 2-1/8" D. box w/ Quick-Lok connector and ground pigtail + TP500 - 3/4" raised two gang
PFTWFA 4Q10AR58	3066227919217	BBT-WF + BBA - 14.5" - 25" telescoping open bracket w/ alignment plate + TP4Q10PF - 4" SQ. X 2-1/8" D. box w/ Quick-Lok connector and ground pigtail + ARM158 - adjustable depth single gang
PFTWFA 4Q102AR	3066227919218	BBT-WF + BBA - 14.5" - 25" telescoping open bracket w/ alignment plate + TP4Q10PF - 4" SQ. X 2-1/8" D. Box w/ Quick-Lok connector and ground pigtail + AMR2 - adjustable depth two gang
PFTA4 4Q1075	3066227918264	BBA-4 - double sided stud mount bracket w/ backside support + TP4Q10PF - 4" SQ. X 2-1/8" D. box w/ Quick-Lok connector and ground pigtail + TP486 - 3/4" raised single gang
PFTA4 4Q10275	3066227712612	BBA-4 - double sided stud mount bracket w/ backside support + TP4Q10PF - 4" SQ. X 2-1/8" D. box w/ Quick-Lok connector and ground pigtail + TP500 - 3/4" raised two gang
PFTA4 4Q10AR58	3066227919224	BBA-4 - double sided stud mount bracket w/ backside support + TP4Q10PF - 4" SQ. X 2-1/8" D. box w/ Quick-Lok connector and ground pigtail + ARM158 - adjustable depth single gang
PFTA4 4Q102AR	3066227918263	BBA-4 - double sided stud mount bracket w/ backside support + TP4Q10PF - 4" SQ. X 2-1/8" D. box w/ Quick-Lok connector and ground pigtail + AMR2 - adjustable depth two gang

# 1. Ruff-IN Made-to-Stock - standard assemblies




**PFTWFA 4D75**

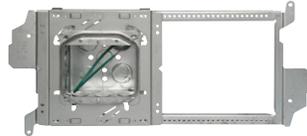

**PFTWFA 4D275**



**PFTWFA 4DAR58**

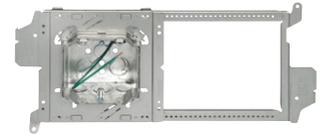

**PFTWFA 4D2AR**




**PFTA4 4D75**



**PFTA4 4D275**



**PFTA4 4DAR58**



**PFTA4 4D2AR**

Catalog #	EAN/UPC code	Description
<b>PFTWFA 4D75</b>	3066227920164	BBA-4 - double sided stud mount bracket w/ backside support + TP403PF - 4" SQ. X 2-1/8" D. box and ground pigtail + TP500 - 3/4" raised two gang
<b>PFTWFA 4D275</b>	3066227920165	BBA-4 - double sided stud mount bracket w/ backside support + TP403PF - 4" SQ. X 2-1/8" D. box and ground pigtail + AMR158 - Adjustable single gang mud ring
<b>PFTWFA 4DAR58</b>	3066227920166	BBA-4 - double sided stud mount bracket w/ backside support + TP403PF - 4" SQ. X 2-1/8" D. box and ground pigtail + AMR2 - Adjustable two gang mud ring
<b>PFTWFA 4D2AR</b>	3066227919653	BBT-WF + BBA - 14.5" - 25" telescoping open bracket w/ alignment plate + TP403PF - 4" SQ. X 2-1/8" D. box and ground pigtail + TP486 - 3/4" raised single gang
<b>PFTA4 4D75</b>	3066227918227	BBT-WF + BBA - 14.5" - 25" telescoping open bracket w/ alignment plate + TP403PF - 4" SQ. X 2-1/8" D. box and ground pigtail + TP500 - 3/4" raised two gang
<b>PFTA4 4D275</b>	3066227918328	BBT-WF + BBA - 14.5" - 25" telescoping open bracket w/ alignment plate + TP403PF - 4" SQ. X 2-1/8" D. box and ground pigtail + ARM158 - adjustable depth single gang
<b>PFTA4 4DAR58</b>	3066227920096	BBT-WF + BBA - 14.5" - 25" telescoping open bracket w/ alignment plate + TP403PF - 4" SQ. X 2-1/8" D. Box and ground pigtail + AMR2 - adjustable depth two gang
<b>PFTA4 4D2AR</b>	3066227918591	BBA-4 - double sided stud mount bracket w/ backside support + TP403PF - 4" SQ. X 2-1/8" D. box and ground pigtail + TP486 - 3/4" raised single gang

# 2. Made-to-Order assemblies

Catalog numbering system for Ruff-IN assembly configurations



Part number example

**PFTHFA-4Q10ARC20DTRW**

**PF THFA — 4Q10 AR C 20 D TR W**

**Series**

<b>PF</b>	Ruff-IN
-----------	---------

**Bracket style**

<b>H3</b>	BB423 single sided bracket for 2½" & 3½" studs
<b>H6</b>	BB46 single sided for 6" studs
<b>TA</b>	BBA alignment plate compatible with BBT-HF telescoping bracket, no backside support
<b>TA4</b>	BBA-4 double sided bracket compatible with BBT-HF telescoping bracket, with backside support for 2½" through 6" studs
<b>TAMG</b>	BBA-MG bracket for multi-gang and 4 <sup>11</sup> / <sub>16</sub> " sq. boxes, compatible with BBT series telescoping bracket, with backside support for 3 <sup>5</sup> / <sub>8</sub> " studs
<b>THFA</b>	BBT-HF hands-free telescoping open bracket for 14½" - 25" stud spacing with BBA box mount
<b>TWFA</b>	BBT-WF wide flange telescoping open bracket for 14½" - 25" stud spacing with BBA box mount
<b>16T</b>	BB2-16T (new) telescoping slider bracket for 16" stud spacing
<b>24T</b>	BB2-24T (new) telescoping slider bracket for 16" stud spacing
<b>18FM</b>	BBF18 floor mount bracket 18" on center
<b>S</b>	BB2TS box slider for BB2 bracket
<b>C</b>	BB2TSC box clip for BB2 bracket
<b>3MM</b>	BB816 3 hole multiple mount bracket for 24" stud spacing
<b>4MM</b>	BB824 4 hole multiple mount bracket for 24" stud spacing
<b>16BO</b>	BB716 open mount bracket for 16" stud spacing
<b>24BO</b>	BB724 open mount bracket for 24" stud spacing
<b>BH24</b>	BA50 T-bar (for 1½" deep boxes)
<b>X</b>	No bracket included

**Box style**

<b>4D</b>	TP403 4 SQ 2 <sup>1</sup> / <sub>8</sub> " deep box ½" & ¾" KO
<b>4S</b>	TP404 4 SQ 1 <sup>1</sup> / <sub>2</sub> " deep box ½" & ¾" KO
<b>432</b>	TP432 4 SQ 2 <sup>1</sup> / <sub>8</sub> " deep box ¾" KO
<b>4Q10</b>	TP4Q10 Quick-Lok 4 SQ 2 <sup>1</sup> / <sub>8</sub> " deep box with (2) cable entries on top
<b>4Q10M</b>	TP4Q10M Quick-Lok 4 SQ 2 <sup>1</sup> / <sub>8</sub> " deep box with (2) cable entries on top and double sided bracket
<b>5Q20</b>	TP5Q20 Quick-Lok 4 <sup>11</sup> / <sub>16</sub> " SQ 2 <sup>1</sup> / <sub>8</sub> " deep box with (4) cable entries on top
<b>436</b>	TP436 4 SQ 2 <sup>1</sup> / <sub>8</sub> " deep box 1 KO
<b>431</b>	TP431 4 SQ 2 <sup>1</sup> / <sub>8</sub> " deep box ½" & ¾" KO with AC/MC clamps in each end
<b>5D</b>	TP525 4 <sup>11</sup> / <sub>16</sub> " welded 2 <sup>1</sup> / <sub>8</sub> " deep box ½" & ¾" KO
<b>560</b>	TP560 4 <sup>11</sup> / <sub>16</sub> " drawn 2 <sup>1</sup> / <sub>8</sub> " deep box 1" KO
<b>562</b>	TP562 4 <sup>11</sup> / <sub>16</sub> " drawn 2 <sup>1</sup> / <sub>8</sub> " deep box 1¼" KO
<b>278</b>	TP278 4" 1½" deep octagon box ½" & ¾" KO
<b>292</b>	TP292 4" 2 <sup>1</sup> / <sub>8</sub> " deep octagon box ½" & ¾" KO

**Box ground wire**

<b>BLANK</b>	Solid
<b>A</b>	Stranded
<b>N</b>	None

**Receptacle ground orientation**

<b>BLANK</b>	Up
<b>DN</b>	Down

**Device color**

<b>V</b>	Ivory
<b>W</b>	White
<b>R</b>	Red
<b>LA</b>	Light almond

**Tamper resistant**

<b>BLANK</b>	Non-tamper resistant
<b>TR</b>	Tamper resistant

**Device type**

<b>D</b>	Duplex receptacle
<b>U</b>	Duplex receptacle/USB
<b>SP</b>	Single pole
<b>G</b>	GFCI
<b>3W</b>	Three way switch

**Device amperage**

<b>15</b>	15A
<b>20</b>	20A

**Device style**

<b>BLANK</b>	Standard
<b>D</b>	Decora

**Mud ring depth and gang**

<b>50</b>	TP484 ½" raised 1 gang
<b>58</b>	TP489 5 <sup>8</sup> / <sub>16</sub> " raised 1 gang
<b>75</b>	TP486 ¾" raised 1 gang
<b>100</b>	TP488 1" raised 1 gang
<b>125</b>	TP490 1¼" raised 1 gang
<b>250</b>	TP498 ½" raised 2 gang
<b>258</b>	TP499 5 <sup>8</sup> / <sub>16</sub> " raised 2 gang
<b>275</b>	TP500 ¾" raised 2 gang
<b>2100</b>	TP502 1" raised 2 gang
<b>2125</b>	TP501 1¼" raised 2 gang
<b>AR</b>	AMR1 adj ¾" to 1-½" raised, 1 gang
<b>AR58</b>	AMR158 adj 5 <sup>8</sup> / <sub>16</sub> " to 1-¼" raised, 1 gang
<b>2AR</b>	AMR2 adj 5 <sup>8</sup> / <sub>16</sub> " to 1-½" raised, 2 gang
<b>3AR</b>	AMR3 adj ¾" to 1-½" raised, 3 gang

**Device grade**

<b>BLANK</b>	No device
<b>C</b>	Commercial
<b>S</b>	Specification
<b>I</b>	Industrial
<b>H</b>	Hospital


\*Duplicate per device.  
†Position 2 and 3 are only added for multi-mount or open mount assemblies. Insert a space, replace "X" and repeats steps 3-11 for additional boxes on assembly. If 1st or 2nd positions are blank, then insert "X" and use steps 3-11 in position where box is required.

If no device is required, catalog number is complete after mud ring step.  
Catalog number reflects 4" mud rings. For 4-11/16" mud rings, see page 35.

# 3. Ruff-IN Engineered-to-Order solutions

## How you save with Ruff-IN fully engineered solutions

- Eliminate time-consuming job site “engineering”
- Eliminate spot buying and excessive material handling
- Eliminate job site material “piles” and wasted time searching for pieces and parts
- Reduce material overages and scrap, including expensive wire and cable
- Speed installations and improve project savings

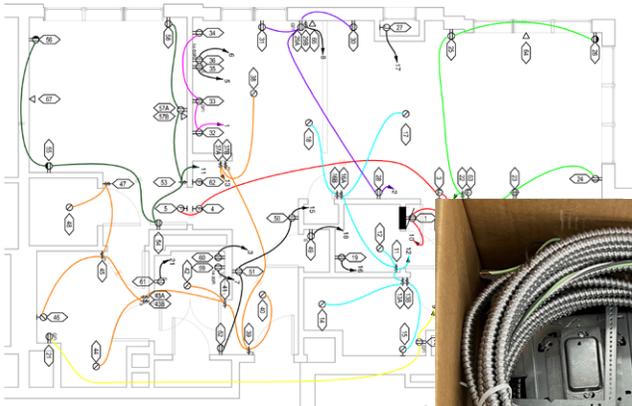

# 8

Minutes

**Estimated time saved per assembly by rough-in crews on a typical hotel over traditional “stick-build” wiring methods**

Interested in using Ruff-IN assemblies on your next project? Use the QR code to contact our experts.



Contact us about RUFF-IN pre-fabricated solutions

Questions about RUFF-IN? Interested in using RUFF-IN assemblies on your next project?

Submit the form below and one of our pre-fab experts will connect with you shortly.

Meet our experts >




# 3. Ruff-IN Engineered-to-Order solutions

Engineered-to-Order solutions are used in commercial buildings such as hotels, condominiums, dormitories, retail offices, hospitals and apartments, where the **architectural design is typically repeated from room to room**.

Our experienced engineering team will work with you to plan and design the exact requirements for your next big project. We'll provide:

- **Dedicated project management**, local sales and distribution support
- **Expert recommendations** on the products and assemblies that best fit your project and align to your preferred installation methods
- **Digital integration** – We can incorporate our design data right into your software plans, further streamlining material management and job complexity
- Assemblies include **custom labels** and are **kitted, and shipped with detailed drawings** to simplify handling and speed installations

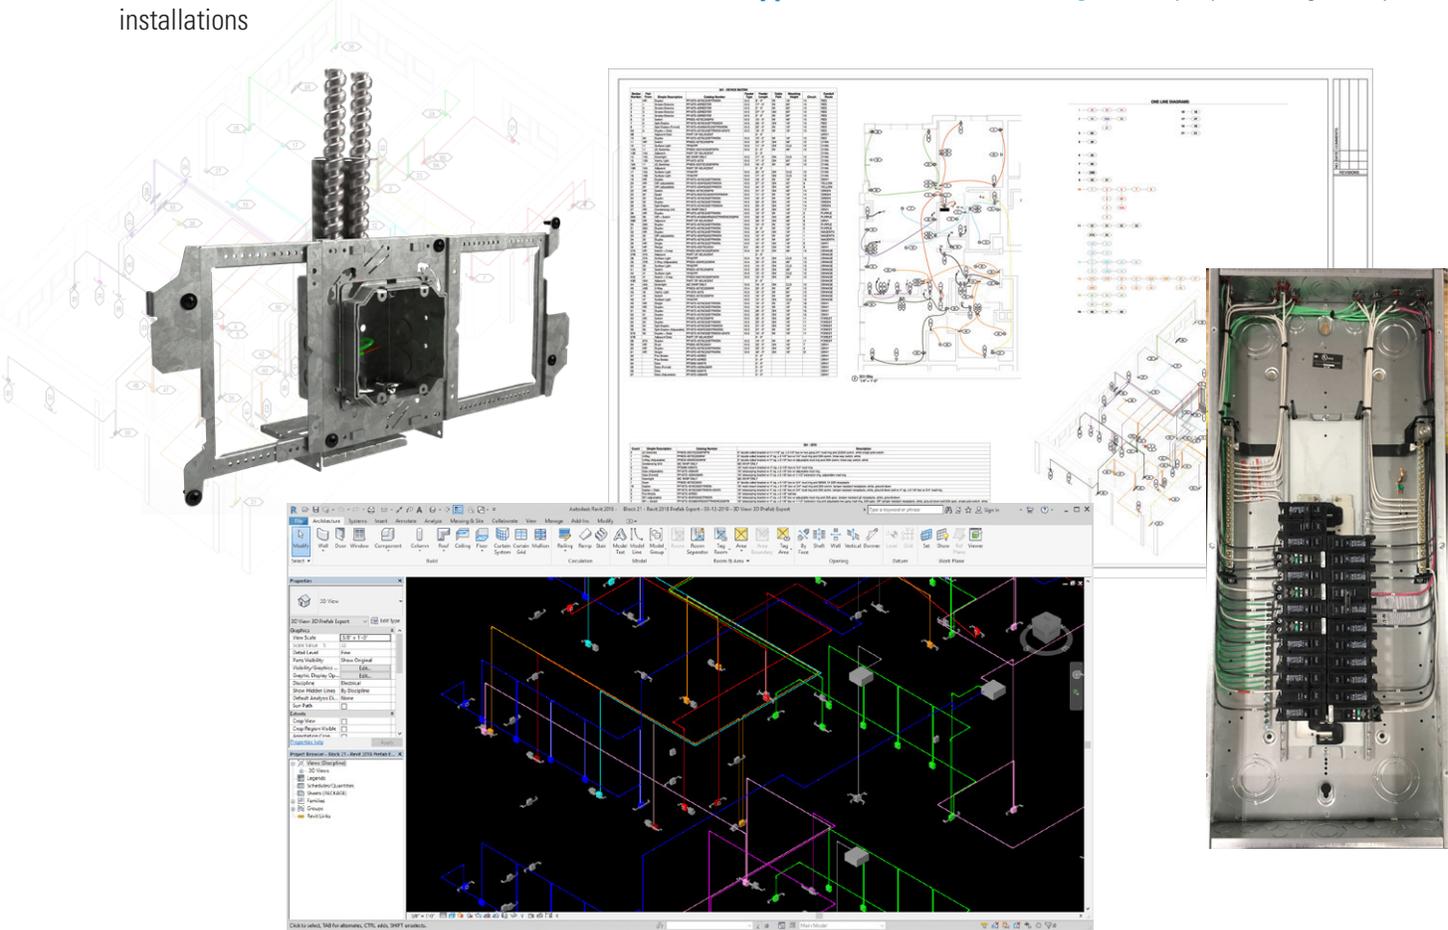

## Experience and agility to manage change


We understand that **unexpected change** occurs on large commercial projects – changes that can come at you fast and are beyond your control. Whatever the obstacle, we'll work with you to make the necessary modifications for future assemblies and keep your project on track and on time.



# Ruff-in solution overview

## Telescoping brackets

With an auto-height adjustment, the rigid BBT-HF telescoping bracket is quick and easy to install. Simply slide the bracket to the width required and snap both ends of the bracket to the stud and secure with screws.

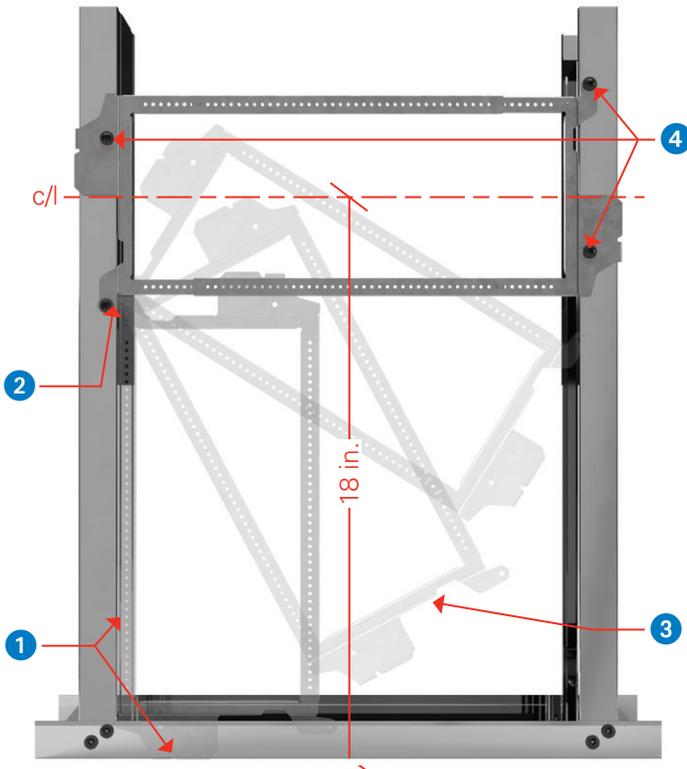

Telescoping bracket

- 1 With bracket fully collapsed, align next to stud with right side at the floor.
- 2 Install sheet metal screw into pivot point.
- 3 Rotate bracket around the installed screw at the pivot point.
- 4 Expand bracket, snap to stud and affix with screws. Center line will be 18" AFF.




### Features

- Easily adjust to accommodate stud widths of 14½" through 25"; a secure fit at all stud spacings
- Available in BBT-16 for 9¼" thru 16½" stud spacings
- Bracket includes an auto-height adjustment feature
- Self-leveling when snapped onto stud; no need for additional leveling tools
- Easy to identify center line on both sides of the bracket
- Snap-on feature works on 1¼" through 1¾" inch width studs
- For studs wider than 1¾" utilize the BBT-WF
- Designed to mount boxes at the exact height on either side of the stud without overlap of adjacent brackets
- Continuous hole pattern allows for positioning of the box mounting bracket anywhere along the length of the bracket
- UL Listed for U.S. and Canada; CSA certified

Patent pending (all parts)

Catalog #	Description	Stud spacing	Box qty.
<b>BBT-HF</b>	Telescoping box bracket	14½" - 25"	25
<b>BBT-WF</b>	Telescoping box bracket for wide flange studs	14½" - 25"	25
<b>BBT-16</b>	Telescoping box bracket	9¼" - 16½"	25

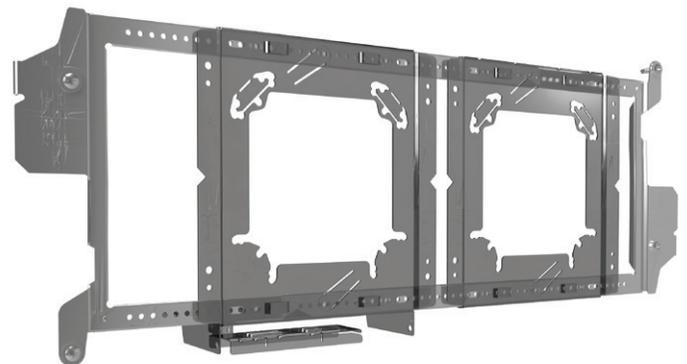

Telescoping bracket with box mounting brackets installed

# Ruff-in solution overview

## Box mounting brackets

The BBA box mounting bracket and the BBA-4 box mounting bracket with support flange snap easily onto the BBT-HF telescoping bracket.



Catalog #	Description	Stud depth	Box qty.
<b>BBA</b>	Box mounting bracket	---	25
<b>BBA-2</b>	Box mounting bracket with back side support	2½"	25
<b>BBA-4</b>	Box mounting bracket with back side support	2½" - 6"	25
<b>BBA-MG</b>	Box mounting bracket for multi-gang and 4 <sup>11</sup> / <sub>16</sub> " boxes	2½" - 3 <sup>5</sup> / <sub>8</sub> "	25

### Features

- Marty Mouse™ ears to retain the box when plaster ring is removed
- Rabbit Ears™ to attach a plaster ring for data devices without using a box
- Accepts 4", 4<sup>11</sup>/<sub>16</sub>" and 5" square box sizes
- Built-in, snap off back support extension for studs from 2.5" to 6" studs
- No need to measure additional box heights – features interlocking brackets to easily and quickly mount boxes side-by-side
- Faster daisy chain boxes; two brackets mount to the same side of the stud
- Works with standard or adjustable mud rings and Rapid Ring self-adjusting pre-fab ring
- Use with BBT-HF or directly to stud
- BBA-MG bracket supports boxes in ceiling or wall
- BBA-MG UL is listed for multiple gang box
- BBA-MG is ideal for fire alarm speaker strobes and nurse call stations in hospitals
- UL Listed for U.S. and Canada; CSA certified

Patent pending (all parts)



BBA front



BBA back



BBA-2 side



BBA-4 front



BBA-4 back



BBA-MG

## Advantage of B-Line series brackets

### No need to measure box heights with interlocking brackets

Mounting boxes side-by-side has never been easier.

- Designed to mount two boxes at exactly the same height on either side of the stud.

### No box needed for DataComm accessories

Innovative rabbit ears make it possible.

- Rabbit Ears and mud ring allow data communication devices, such as card readers, to be attached to the bracket without the use of a box.

### One SKU mounts multiple box sizes - fewer parts to handle on the job-site

Built-in back support accessory for job-site flexibility.

- Bracket accepts 4", 4<sup>11</sup>/<sub>16</sub>", and 5" boxes.
- Bracket extender easily snaps off of the bracket to snap into place as a back support for up to 6" stud depths.

### Faster daisy chain boxes

Faster installs with B-Line series solutions.


- Two brackets mount to the same side of a stud at the same height.



[Eaton.com/BBT-HF](http://Eaton.com/BBT-HF)

# Ruff-in solution overview

## Quick-Lok outlet boxes and assemblies

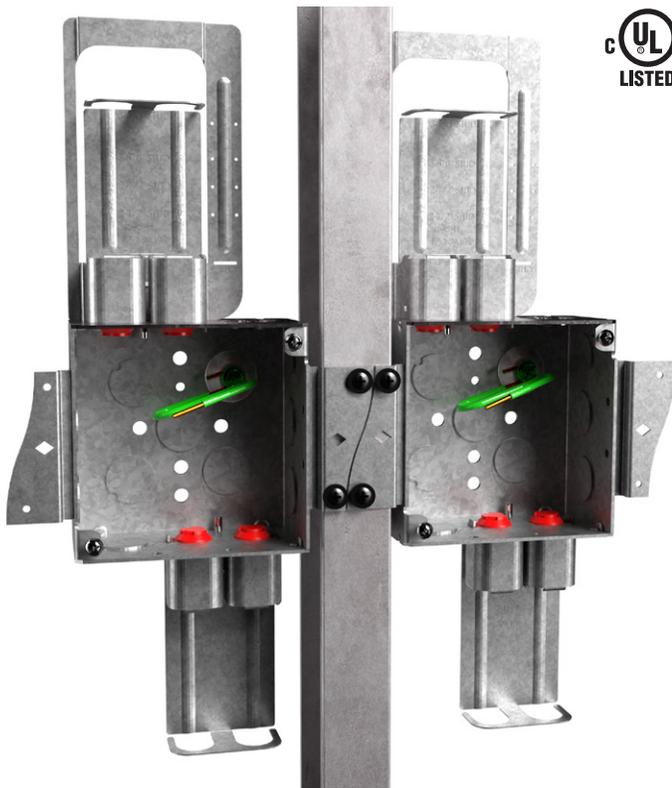

### More space and options

- UL Listed
- Large 44 cubic inch capacity for the entire 4<sup>11/16</sup>" square offering
- 33.3 cubic inch capacity for entire 4" square offering
- Extra 1/2" and 3/4" eccentric knockouts available on select models
- Ground bump available on all models
- Pre-installed pigtail provided as an option on all models




### Easy to mount

- Patented S-curved shape allows for two brackets to be interlocked and mounted side by side on same stud
- Available with single or double sided options
- Assemblies without flat face bracket can be installed in conjunction with B-Line series stud mounting brackets



### Patented pre-installed external connectors

- 4" square:  
(2) top only cable entries or (2) top & (2) bottom cable entry options
- 4-11/16" square:  
(2-4) top only cable entries or (2-4) top & (2-4) bottom cable entry options
- Extra 1/2" and 3/4" eccentric knockouts available on select models
- Integral insulator and easily removable knockout plug

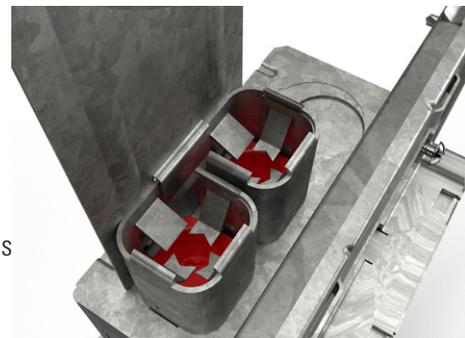


### Cable management & support

Patented field installable cable management & backside support accessories

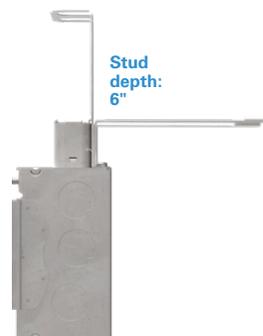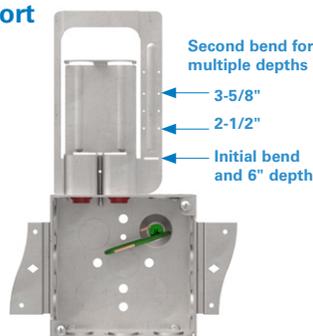


# Ruff-in solution overview


## Quick-Lok outlet boxes and assemblies

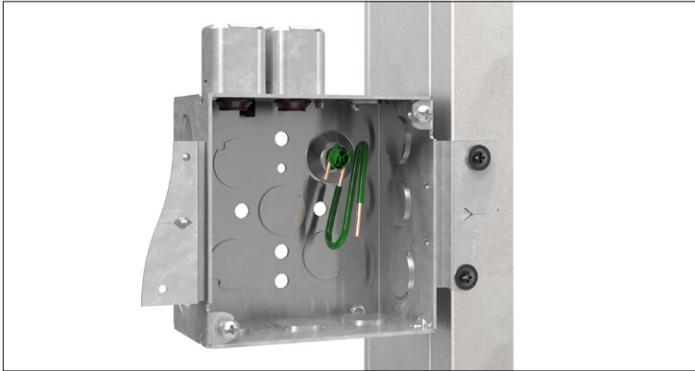


**Step 1.** Mount box to stud.

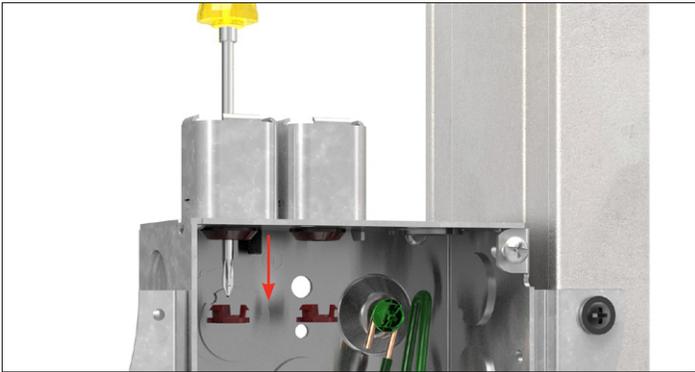


**Step 2.** Pop out the plug by inserting a screwdriver through the top of the Quick-Lok connector in the location where cable will be installed. If you accidentally pop out too many plugs, you can reinstall.

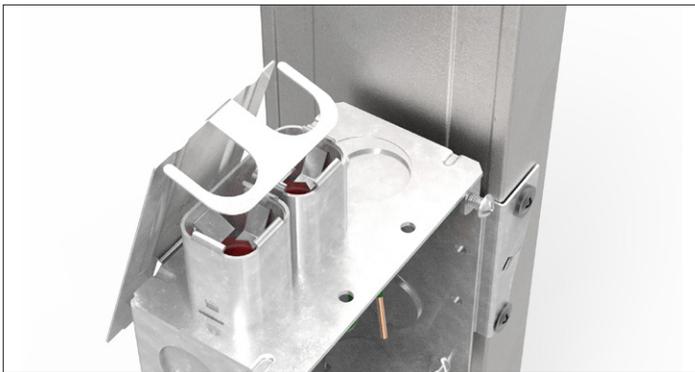



**Step 3.** Align the cable openings on the cable management with the top of the Quick-Lok connector.

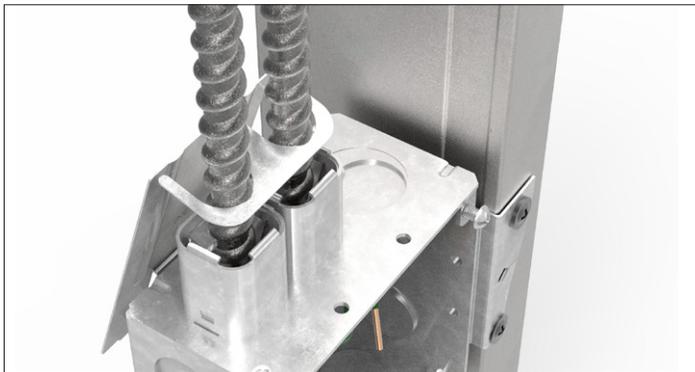

**Step 4.** Insert cable through the cable management and Quick-Lok connector simultaneously.

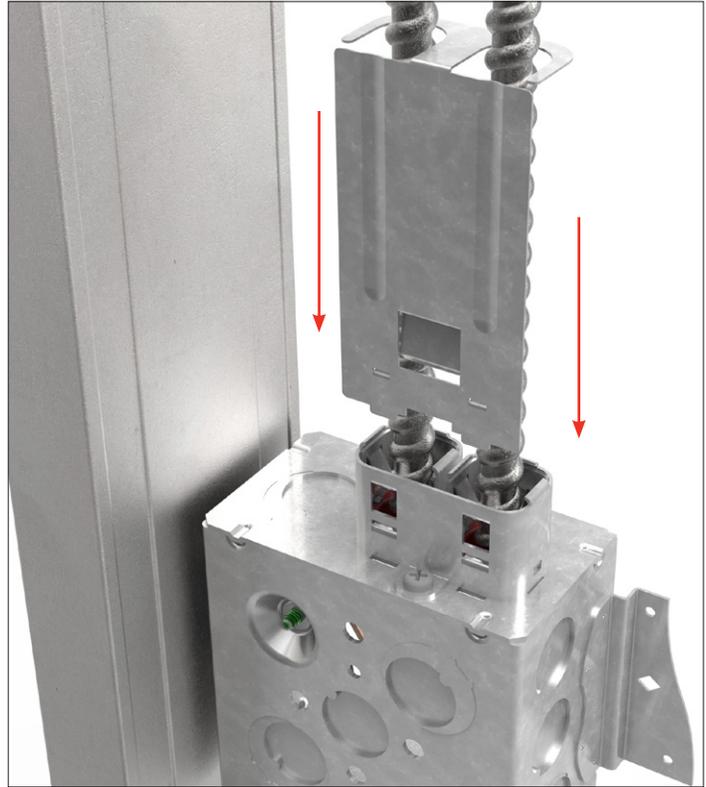

**Step 5.** Slide cable management up and snap into the box and Quick-Lok connector after all cables are installed.

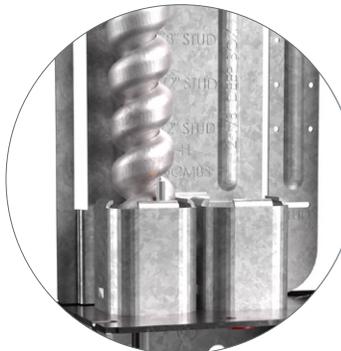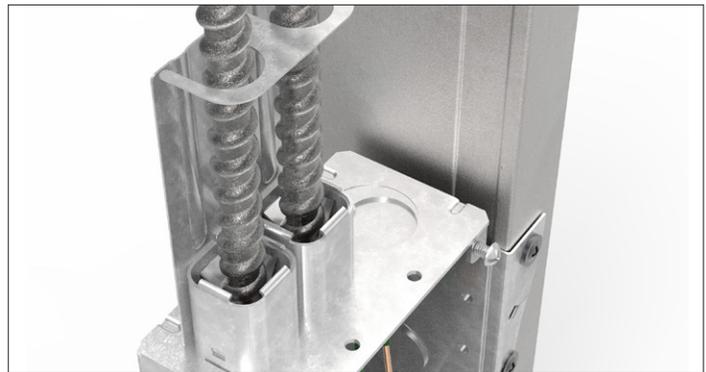

**Note:**

For type MC-1 cable (*Southwire MCAP, Encore Smartground, or similar*), the bare aluminum ground should be wrapped against the outside jacket and protrude from the top of the Quick-Lok connector  $1/8$ ". Any excess will be cut off.

[Eaton.com/Quick-Lok](http://Eaton.com/Quick-Lok)



# Ruff-IN components - brackets and supports

## Box mounting brackets

### Quick installation

- BBA easily snaps onto BBT telescoping brackets and accepts 4", 4<sup>11</sup>/<sub>16</sub>" and 5" box sizes
- Marty Mouse ears retain the box when plaster ring is removed
- Rabbit Ears to attach a plaster ring for data devices without using a box


### Application versatility

- BBA-2 and BBA-4 come with backside support; both can be stud mount or installed in the BBT bracket
- BBA-2 is designed specifically for 2<sup>1</sup>/<sub>2</sub>" deep studs without modification
- BBA-4 features built-in, snap off back support extension for studs from 2.5" to 6"
- No need to measure additional box heights – features interlocking brackets to easily and quickly mount boxes side-by-side
- Faster daisy chain boxes; two brackets mount to the same side of the stud
- Works with standard or adjustable mud rings

### BBA-MG features

- Bracket supports boxes in ceiling or wall
- UL Listed for multiple gang box
- Ideal for fire alarm speaker strobes and nurse call stations in hospitals

Patent pending (all parts)




**BBA front**



**BBA back**



**BBA-2 side**




**BBA-4 front**



**BBA-4 back**



**BBA-MG**

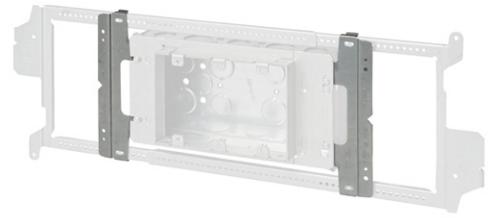

**BBA-MG shown on 3 gang PFTHFAMG-630653**

Catalog #	Description	Stud spacing	Box qty.
<b>BBA</b>	Box mounting bracket	—	25
<b>BBA-2</b>	Box mounting bracket with backside support	2 <sup>1</sup> / <sub>2</sub> "	25
<b>BBA-4</b>	Box mounting bracket with backside support	2 <sup>1</sup> / <sub>2</sub> " - 6"	25
<b>BBA-MG</b>	Box mounting bracket for multi-gang and 4 <sup>11</sup> / <sub>16</sub> " boxes	2 <sup>1</sup> / <sub>2</sub> " - 3 <sup>5</sup> / <sub>8</sub> "	25



[Eaton.com/BBT-HF](http://Eaton.com/BBT-HF)

# Ruff-IN components - brackets and supports



## Hands-free telescoping brackets

With an auto-height adjustment, the rigid BBT-HF telescoping bracket is quick and easy to install. Simply slide the bracket to the width required and snap both ends of the bracket to the stud and secure with screws.


- Easily adjust to accommodate stud widths of 14½" through 25"; a secure fit at all stud spacings
- Bracket includes an auto-height adjustment feature
- Self-leveling when snapped onto stud; no need for additional leveling tools
- Easy to identify center line on both sides of the bracket
- Snap on feature works on 1¼" through 1¾" inch width studs
- For studs wider than 1¾" utilize the BBT-WF
- Designed to mount boxes at the exact height on either side of the stud without overlap of adjacent brackets
- Continuous hole pattern allows for positioning of the box mounting bracket anywhere along the length of the bracket

1. With bracket fully collapsed, align next to stud with right side at the floor.
2. Install sheet metal screw into pivot point.
3. Rotate bracket around the installed screw at the pivot point.
4. Expand bracket, snap to stud and affix with screws. Center line will be 18" AFF.

BBT-HF

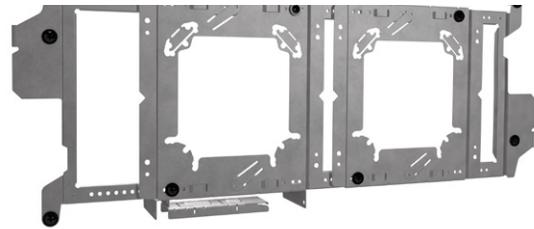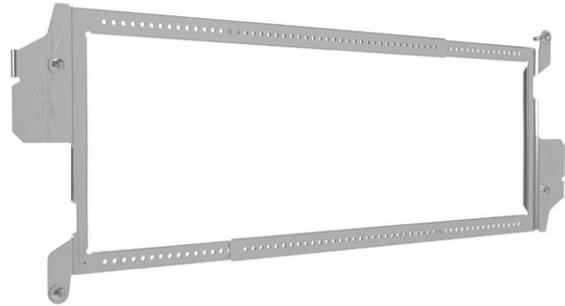

Telescoping bracket with BBA-4 and BBA added


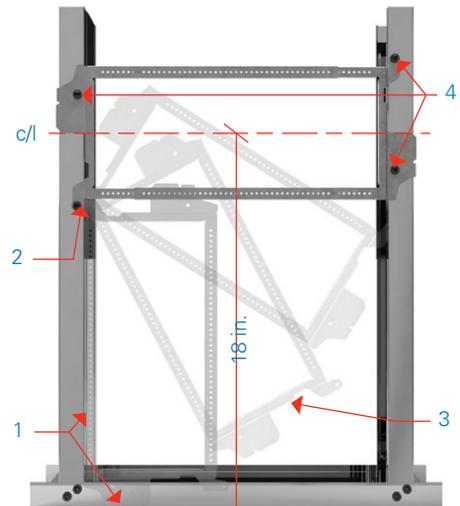


Catalog #	Description	Stud spacing	Box qty.
BBT-HF	Telescoping box bracket	14½" - 25"	25
BBT-WF	Telescoping box bracket for wide flange studs	14½" - 25"	25

Patent pending (all parts)

## Ceiling clips for BBT brackets

- Installs onto BBT-WF with two screws for installation into T-Grid ceilings
- Box attached with BBA or BBA-4 alignment bracket
- Wide support prevents bracket from rocking, and rigidity of BBT-WF reduces pressure on the ceiling tile
- Sheet metal screw location and loop hole for support drop wire aids compliance with NEC 314.23 (D)
- Install fire alarm boxes, nurse call, lighting controls, etc. into the ceiling grid using the same brackets installed in the wall, reducing overall SKU count
- Install multiple boxes into the same ceiling tile
- Static load capacity 50lbs.
- Available for field or prefab shop assembly, or preassembled on a BBT-WF bracket with box and cover preinstalled

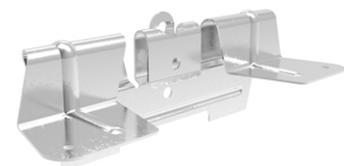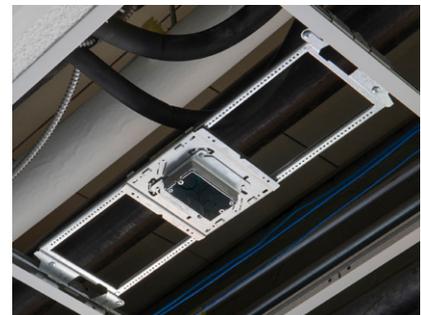

The combination of the BBT-WF and BBT-TG bracket is not listed to support a luminaire.

UPC/part number	Catalog #	Description	Box qty.
79903885065	BBT-TG	Ceiling clips for BBT brackets	100

# Ruff-IN components - brackets and supports

## Telescoping brackets

- Completely adjustable, fits a range of stud spacing
- Mounts 1½", 2⅛", 2½", and 2⅜" deep boxes
- Increased rigidity through center groove design
- Only two screws required to mount 1½" and 2⅛" box depths
- Pre-punched screw holes provide for easy box installation
- Bar is marked with a scale for stud spacing
- Finish: pre-galvanized



BB2-16T



BB2-24T



BB2-24TS

UPC/part number	Catalog #	Stud spacing	Box qty.
79903863001	<b>BB2-16T</b>	11" to 18"	50
79903863002	<b>BB2-24T</b>	15½" to 26"	50
78205138614	<b>BB2-16TS</b>	11" to 18"	20
78205138628	<b>BB2-24TS</b>	15" to 26"	20

Patent pending

## Box mounting clip

- Allows for pre-fabrication of the electrical box prior to installing the box onto the bracket
- Tool-less, simply installs by snapping onto the bracket and requires no hardware to secure



UPC/part number	Catalog #	Description	Box qty.
79903863003	<b>BB2TSC</b>	Box mounting	100

Patent pending





Shown mounted on box

# Ruff-IN components - brackets and supports

## Multiple box mounting brackets


- Increased strength and rigidity help withstand the stress of drywall installation
- Supports most US & Canadian boxes and plaster rings 4" square and 4<sup>11</sup>/<sub>16</sub>" square
- Compatible with adjustable mud rings (see page 26)
- Available factory assembled as part of the Ruff-IN pre-fab line with box(es), mud ring(s), and ground wire(s)
- Finish: pre-galvanized
- Patent pending

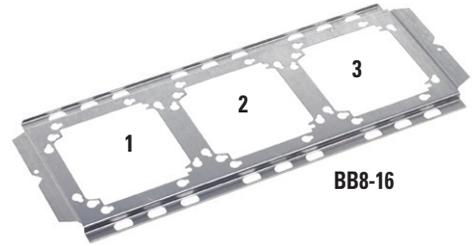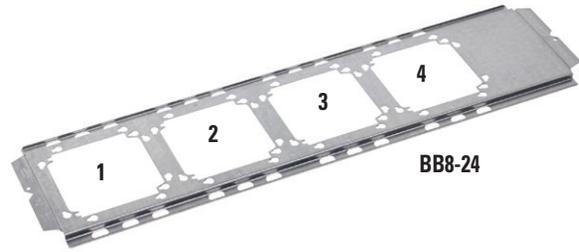


UPC/part number	Catalog #	Stud size	Box qty.
78101102898	<b>BB8-16</b>	16"	25
78101102900	<b>BB8-24</b>	24"	25

## Open box mounting brackets

- Open box support allows for adjustability of box position between studs
- Supports most U.S. and Canadian boxes and/or plaster rings 4" square, 4<sup>11</sup>/<sub>16</sub>" square, 5" square, and multi-gang boxes
- Fits up to 1<sup>1</sup>/<sub>2</sub>" wide studs 16" to 24" on center
- Compatible with adjustable mud rings (see page 26)
- Field cut to adjust to non-standard stud spacings
- Stamped markings at 1/4", 1/2", and 1" increments to allow the installer to easily locate the desired box position
- Available factory assembled as part of the Ruff-IN pre-fab line with box(es), mud ring(s), and ground wire(s)
- BB7AP alignment plate centers and secures box to the bracket, allows for easy adjustment of box location
- Finish: pre-galvanized
- Patent pending

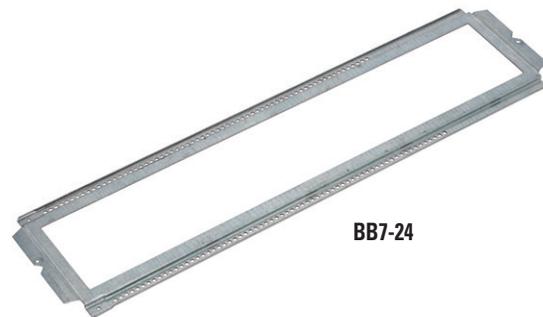

UPC/part number	Catalog #	Stud size	Box qty.
78101145325	<b>BB7-16</b>	16"	25
78101145328	<b>BB7-24</b>	24"	25
79903859494	<b>BB7AP</b>	—	100

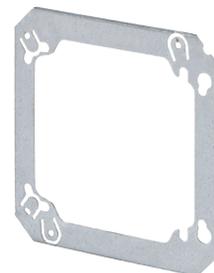

**BB7AP**


# Ruff-IN components - brackets and supports

## Single sided box support brackets


- Improved far-side support prevents box movement in wall cavity
- Adjustable far-side supports designed to help reduce labor
- Brackets may be piggy-backed in series
- Not recommended for pre-installed wiring devices. See BB70 (page 21) for an improved pre-fab assembly solution




UPC/part number	Catalog #	Stud size	Box qty.
78101118190	<b>BB4-23</b>	3½" & 2½"	100
78101118200	<b>BB4-4</b>	4", 3½" & 2½"	100
78101118202	<b>BB4-6</b>	6", 5½", 3½", 2½"	100

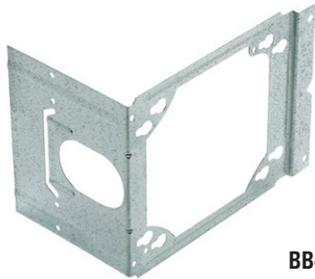

BB4-23

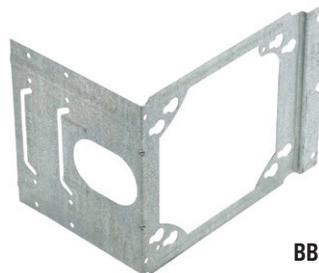

BB4-4

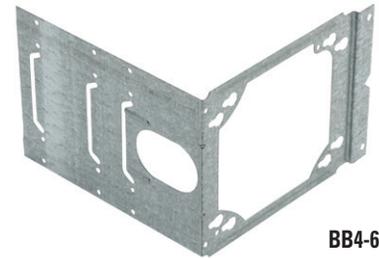


BB4-6

## Two gang double sided support brackets


- Improved far-side support prevents box movement in wall cavity
- Adjustable far-side supports designed to help reduce labor
- Ruff-IN assemblies available with box, plaster ring and ground wire




UPC/part number	Catalog #	Stud size	Box qty.
79903848375	<b>BB4-23D</b>	3½" & 2½"	50
79903848376	<b>BB4-4D</b>	4", 3½" & 2½"	50
79903848377	<b>BB4-6D</b>	6", 5½", 3½", 2½"	50

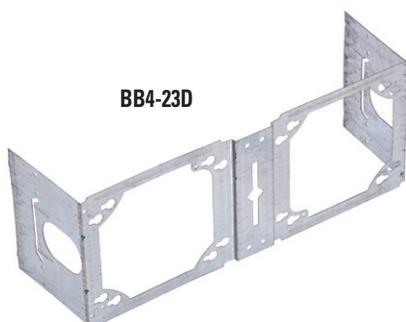

BB4-23D

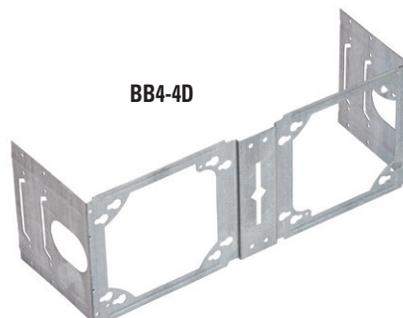

BB4-4D

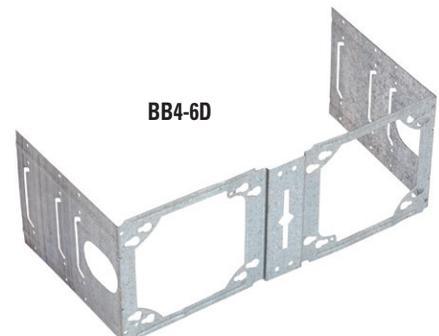

BB4-6D

# Ruff-IN components - brackets and supports

## Box support brackets


- Interlocking wrap-around design provides extra rigidity
- Compatible with adjustable plaster rings (see page 26)
- Adjustable for varying stud depths (2½" to 6"); simply bend bracket for 2½", 3½" and 4" depths
- For 5½" depth, snap the BB70E into the next notch on the bracket side
- Integral mounting tabs for attaching plaster rings
- Multiple brackets may be ganged together
- Available factory assembled as part of the Ruff-IN pre-fab line with box, mud ring, and ground wire
- Finish: Pre-galvanized



UPC/part number	Catalog #	Stud size	Box qty.
79903856399	<b>BB70</b>	2½" - 4"	50
79903856400	<b>BB70*</b>	5½" - 6"	50

Patent #944236B2

\*BB70E (Sold separately, must be used with BB70)

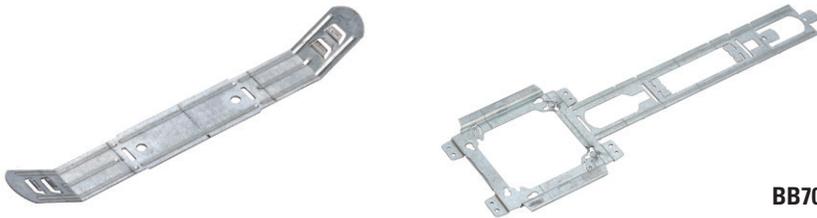

**BB70**



Can be used with BBFS18 (floor stand); See page 22


## Floor stand box supports

- BBFS-18 floor stand ensures consistent box height and eliminates need to measure for proper install height
- Can be used with BB7 and BB8 brackets
- Finish: pre-galvanized



**BBFS-18**


UPC/part number	Catalog #	Description	Box qty.
79903851597	<b>BBFS-18</b>	Floor stand	25

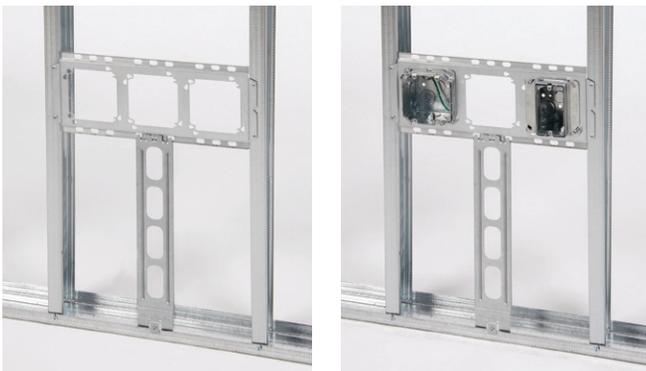

BBFS-18 Installed (can be used with BB7 or BB8 brackets)

### Productivity and part reduction opportunity!

Try the auto height on the BBT-HF instead of floor stands - less parts. See page 17 for more details.

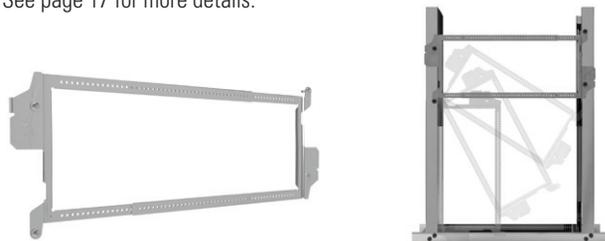

# Ruff-IN components - brackets and supports


## Floor mount box supports

- BBF floor stand provides the most rigid support in the industry
- Far-side support accommodates 6", 5½", 3⅝", and 2½" stud depths
- Fold-out tab built-in to attach floor stand to stud if desired
- Integral "wings" provide rigid support when floor stand is mounted between studs
- Optional cable containment clip securely attaches to floor stand without hardware
- Patented Marty Mouse ears enable boxes to be secured with or without the plaster rings
- Finish: pre-galvanized



UPC/part number	Catalog #	Stud size	Box qty.
78205152944	<b>BBF15</b>	15" Floor stand	25
78205152945	<b>BBF18</b>	18" Floor stand	25
78205152946	<b>BBF24</b>	24" Floor stand	25
78205152947	<b>BBFC</b>	Cable containment clip	25
78205152948	<b>BBF15C</b>	15" Floor stand with cable containment clip	25
78205152949	<b>BBF18C</b>	18" Floor stand with cable containment clip	25
78205152950	<b>BBF24C</b>	24" Floor stand with cable containment clip	25

Patent # 5595362  
# 7956285B2

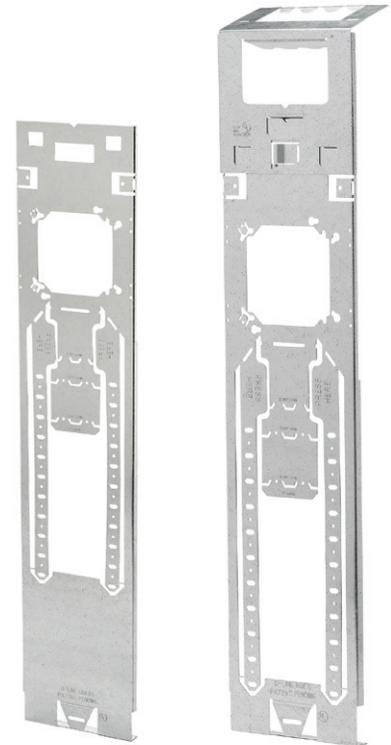

**BBFC**

**BBF24**

**BBFxxC**

## Floor mounted box support

- Provides support for electrical box from floor track or concrete forms
- 18" length with break-away feature for 12" or 16" box mounting
- Finish: pre-galvanized




UPC/part number	Catalog #	Description	Box qty.
78101103623	<b>BB-18</b>	Floor mounted box support	50



**BB-18**




**BBF15**

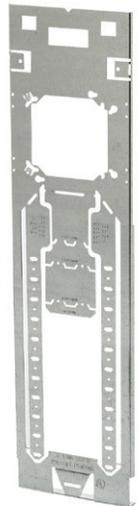

**BBF18**

### Productivity and part reduction opportunity!

Try the auto-height on the BBT-HF instead of floor stands - less parts. See page 17 for more details.

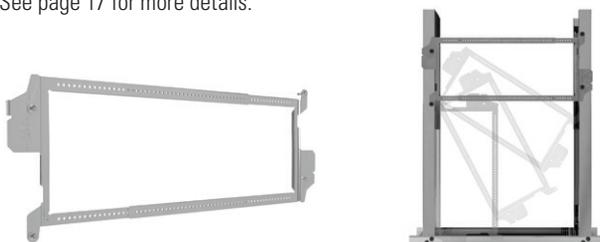

# Ruff-IN components - brackets and supports

## Ceiling hangers

- Supports octagonal or square boxes on 24" span
- Bendable ends mount 1½" or 2⅛" deep boxes without tools
- Self-centering feature positions box on center
- Includes BA50C4T box mounting clip
- Ultimate static load capacity: 50 lbs. (without dedicated dropwire)
- Static load capacity: 70 lbs. (with dedicated dropwire); 35 lbs. Canada
- Finish: pre-galvanized



UPC/part number	Catalog #	Description	Box qty.
78101196490	<b>BA50</b>	Box hanger	25
78101118080	<b>BA12</b>	Box hanger	50

BA50



TP275BH



TP292BH



TP315

### For conduit – no clamps – new work

UPC/part number	Catalog #	Stud spacing	Ground pigtail	Depth	Cubic in.	Fan rated (weight lbs.)	16" Fixture rated (weight lbs.)	24" Fixture rated (weight lbs.)	Box qty.
3078618910315	<b>TP315*</b>	16" - 24"	No	1½"	15.5	35	150	90	12
3078618990292	<b>TP292BH</b>	16" - 24"	No	2⅛"	21.5	No	50	50	10

\*TP315 comes with Romex clamp installed on one side. The other three sides have a ½" KO, a bagged MC clamp and screw, and a bagged plastic NM connector.

### For non-metallic cable – with clamps – new work

UPC/part number	Catalog #	Stud spacing	Ground pigtail	Depth	Cubic in.	Fan rated (weight lbs.)	16" Fixture rated (weight lbs.)	24" Fixture rated (weight lbs.)	Box qty.
3066227709914	<b>TP275BH</b>	16" - 24"	No	1½"	15.5	70	90	50	10

## Ceiling assemblies

- Box support bracket, outlet box and cover included
- Outlet boxes feature installed insulated solid ground wire with ground screw
- Finish: pre-galvanized



PFBG812-S18-W2-MC3-525568-BG812-BG812



PFBRC51-S18-W2-5Q11568

UPC/part number	Catalog #	Description	Ground pigtail	Depth	Cubic in.	Box qty.
3066227919609	<b>PFBG812-S18-W2-MC3-525568-BG812-BG812</b>	BG812-S18-MC3 bracket with TP525PF box and TP568 cover	Yes	2⅛"	44	15
3066227921089	<b>PFBRC51-S18-W2-5Q11568</b>	BRC51-S18-W2 bracket with TP5Q11PF box and TP568 cover	Yes	2⅛"	66	15


# Ruff-IN components - boxes and covers

## Quick-Lok outlet boxes


- Large 44 cubic inch capacity for the entire 4<sup>11</sup>/<sub>16</sub>" square offering
- 33.3 cubic inch capacity for entire 4" square offering
- Extra 1/2" and 3/4" eccentric knockouts available on select models
- Ground bump available on all models
- Pre-installed pigtail provided as an option on all models
- Listed for use with fire pad box inserts, great for prefabrication!




**TP4Q10PF**

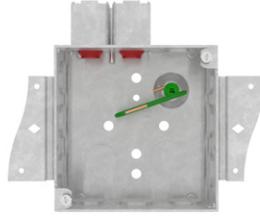

**TP4Q10MPF**




**TP4Q11PF**




**TP4Q11HPF**


UPC/part number	Catalog #	Stud spacing
66227711495	<b>TP4Q10PF</b>	(2) cable entries on top, 8" solid #12 ground wire
66227711498	<b>TP4Q10MPF</b>	(2) cable entries on top, double sided bracket, 8" solid #12 ground wire
3066227711506	<b>TP4Q10CBMPF</b>	(2) cable entries on top, double sided bracket, TPQCMBS cable management backside support, 8" solid #12 ground wire
66227711508	<b>TP4Q11PF</b>	(2) cable entries on top, (2) cable entries on bottom, 8" solid #12 ground wire
66227711510	<b>TP4Q11HPF</b>	(2) cable entries on top, (2) cable entries on bottom, single sided bracket, 8" solid #12 ground wire




**TP5Q10PF**

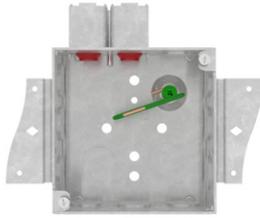

**TP5Q10MPF**



**TP5Q11PF**

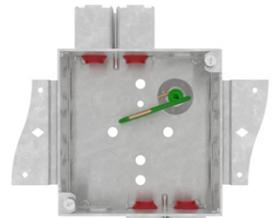

**TP5Q11MPF**

UPC/part number	Catalog #	Stud spacing
66227711527	<b>TP5Q10PF</b>	(2) cable entries on top, 8" solid #12 ground wire
66227711528	<b>TP5Q10MPF</b>	(2) cable entries on top, double sided bracket, 8" solid #12 ground wire
66227711533	<b>TP5Q11PF</b>	(2) cable entries on top, (2) cable entries on bottom, 8" solid #12 ground wire
66227711535	<b>TP5Q11MPF</b>	(2) cable entries on top, (2) cable entries on bottom, double sided bracket, 8" solid #12 ground wire
66227711539	<b>TP5Q20PF</b>	(4) cable entries on top, ground bump, solid #12 ground wire
66227711542	<b>TP5Q20MPF</b>	(4) cable entries on top, double sided bracket, 8" solid #12 ground wire

## Cable management & support

- Patented field installable cable management & backside support accessories

Catalog #	Description
<b>TPQCMBS</b>	Cable management and backside support
<b>TPQCM</b>	Cable management



**TPQCMBS**



**TPQCM**



[Eaton.com/Quick-Lok](http://Eaton.com/Quick-Lok)

# Ruff-IN components - boxes and covers



## TP4 4" square outlet boxes

- 33.3 cubic inch capacity for entire 4" square offering
- Ground bump available on all models
- Pre-installed pigtail provided as standard



TP4HPF



TP4MPF



TP4MSBPF

Cat. #	Bracket	Description	Grounding method	Knockouts		Unit qty.	Wt. lbs. per 100
				Sides	Bottom		
TP4H	"S"	Welded	Ground bump	8 - 1/2", 4 - 1/2" + 3/4" E	2 - 1/2", 2 - 1/2" + 3/4" E	25	92
TP4MPF*	"S"	Welded	Ground bump	8 - 1/2", 4 - 1/2" + 3/4" E	2 - 1/2", 2 - 1/2" + 3/4" E	25	96
TP4MSB	MSB	Welded	Ground bump	6 - 1/2", 3 - 1/2" + 3/4" E	2 - 1/2", 2 - 1/2" + 3/4" E	25	98
TP4CS	-	Welded	Ground bump	8 - 1/2", 4 - 1/2" + 3/4" E	2 - 1/2", 2 - 1/2" + 3/4" E	25	88

\*cUL Listed.

## TP5 4 11/16" square outlet boxes

- 42.0 cubic inch capacity
- Ground bump available on all models
- Pre-installed pigtail provided as standard



TP5HPF



TP5MPF



TP5MSBPF

Cat. #	Bracket	Description	Grounding method	Knockouts		Unit qty.	Wt. lbs. per 100
				Sides	Bottom		
TP5H	"S"	Welded	Ground bump	12 - 1/2" + 3/4" C	2 - 1/2", 2 - 1/2" + 3/4" E	25	111
TP5MPF*	"S"	Welded	Ground bump	12 - 1/2" + 3/4" C	2 - 1/2", 2 - 1/2" + 3/4" E	25	115
TP5MSB	MSB	Welded	Ground bump	9 - 1/2" + 3/4" C	2 - 1/2", 2 - 1/2" + 3/4" E	25	120
TP5HS	-	Welded	Ground bump	12 - 1/2" + 3/4" E	1 - 1/2", 2 - 1/2" + 3/4" E	25	109

\*cUL Listed.

## Uni-Mount™ box supports

- Provides a secure box support and features a built-in plaster ring
- Rigid bracket design eliminates the need for far-side support
- Guide tabs ensure alignment on studs
- Ruff-IN assemblies available with box, plaster ring and ground wire
- Fire stop pad can be pre-installed in boxes if desired
- Not recommended for pre-installed wiring devices; (see BB70 for an improved pre-fab assembly solution)



TP31000



TP35000

UPC/part number	Catalog #	Description	Box qty.
3078618930000	TP30000	1/2" raise	50
3078618931000	TP31000	5/8" raise	50
3078618932000	TP32000	3/4" raise	50
3078618935000	TP35000	1/2" raise	50
3078618936000	TP36000	5/8" raise	50
3078618937000	TP37000	3/4" raise	50



# Ruff-IN components - boxes and covers

## Adjustable mud rings

- Adjustable mud ring can be used with 4" square and 4<sup>11</sup>/<sub>16</sub>" square, 2<sup>1</sup>/<sub>8</sub>" deep boxes and fits a range of drywall thicknesses
- Mud ring can be adjusted after sheet rock, mud, or tile is installed without removing the wiring devices
- Helps reduce labor and requirements for multiple products of varying wall thicknesses



UPC/part number	Catalog #	Description	Depth	Box qty.
3066227705986	<b>AMR158</b>	One device adjustable ring for 4" square outlet boxes	5/8" - 1 1/4"	50
3066227701195	<b>AMR1</b>	One device adjustable ring for 4" square outlet boxes	3/4" - 1 1/2"	50
3066227701196	<b>AMR2</b>	Two device adjustable ring for 4" square outlet boxes	5/8" - 1 1/2"	50
3066227705985	<b>AMR3</b>	Three device adjustable ring for 4" square outlet boxes	3/4" - 1 1/2"	50
3066227705987	<b>AMR0</b>	Round device adjustable ring for 4" square outlet boxes	3/4" - 1 1/2"	50
3066227717122	<b>AMR51</b>	One device adjustable ring for 4 <sup>11</sup> / <sub>16</sub> " square outlet boxes	5/8" - 1 1/4"	50
3066227717123	<b>AMR52</b>	Two device adjustable ring for 4 <sup>11</sup> / <sub>16</sub> " square outlet boxes	5/8" - 1 1/2"	50

## Mud rings

- Mud rings can be used with 4" square boxes and fits a range of drywall thicknesses



UPC/part number	Catalog #	Description	Depth	Box qty.
3078618910484	<b>TP484</b>	One device ring	1/2"	50
3078618910489	<b>TP489</b>	One device ring	5/8"	50
3078618910486	<b>TP486</b>	One device ring	3/4"	50
3078618910488	<b>TP488</b>	One device ring	1"	50
3078618910490	<b>TP490</b>	One device ring	1 1/4"	50
3078618910498	<b>TP498</b>	Two device ring	1/2"	50
3078618910499	<b>TP499</b>	Two device ring	5/8"	50
3078618910500	<b>TP500</b>	Two device ring	3/4"	50
3078618910502	<b>TP502</b>	Two device ring	1"	50
3078618910501	<b>TP501</b>	Two device ring	1 1/4"	25

# Ruff-IN components - accessories

## Metal protector plates

- Protects box contents from drywall mud, paint and debris
- Protector plates provided with all wiring device assemblies
- Can be installed on plaster rings with or without pre-installed wiring devices
- Helps protect pre-installed wiring devices from damage during drywall installation
- Design transmits force of drywall installation to the plaster ring - not the wiring device
- Domed plate for toggle switches allows for clearance between the plate and switch, and helps eliminate scratching of the devices
- Two protector plates are required for two device plaster rings

BPS1



BPS2



BPR1



UPC/part number	Catalog #	Devices	Plaster ring style	Box qty.
78205149197	<b>BPR1</b>	Receptacles, GFCI, decorator, none	One device	50
78205138937	<b>BPS1</b>	Toggle switches	One device	50
78205149199	<b>BPR2</b>	Receptacles, GFCI, decorator, none	Two device	50
78205138938	<b>BPS2</b>	Toggle switches	Two device	25

BPR2



## Wiring devices



Today's commercial buildings must be energy-efficient, intelligent and provide a safe, productive and inviting environment. Whether it's turning lights ON/OFF when motion is detected or controlling receptacle outlets to minimize energy use, Arrow Hart's specification grade commercial wiring devices are engineered with unique features that can help reduce installation time, provide reliable performance and save energy.

### Commercial switches

- Designed to save time and labor, our wide range of commercial grade switches include traditional toggle and decorator styles that are thoroughly tested to ensure reliable electrical and mechanical performance.

### Commercial specification grade receptacles

- Commercial grade receptacles are engineered for safe and reliable performance while providing installation efficiency to help finish the job on time.
- Straight blade receptacles are UL 498 and Federal Specification WC-596 listed for maximum durability.
- The dual and half controlled receptacles feature a NEMA approved controlled symbol for easy identification of a controlled circuit, meeting the latest NEC® requirements and CA Title 24 and ASHRAE 90.1 Energy Efficiency standards.

# Ruff-IN components - accessories

## Concrete box clamp

- Secures electrical boxes in concrete block
- Quickly installs with no tools required
- Works for single or double gang boxes
- Completely re-usable
- Able to be used with flush mount rings or penetrating rings when block wall will be covered

UPC/part number	Catalog #	Description	Box qty.
79903863423	<b>BB-4SCBC</b>	Concrete box clamp	25



## Cable support

- Can be push mounted to stud for positioning
- Stiffening ribs and more material for rigid design
- Zip tie locking tab allows trouble-free securing of cables
- Attaches to stud using only one screw
- Allows cables to be positioned a minimum of 1¼" from face of stud as required by NEC Article 300.4(D)

UPC/part number	Catalog #	Description	Box qty.
79903843761	<b>BRC6M</b>	Cable support	100

Note: Canadian applications are limited to wood studs only.

Cable type	Size	Cable capacity
Non-Metallic cable (NM)	14/2, 14/3, 12/2, 12/3, 10/2, 10/3, 8/2 with ground	8
	8/3, 6/2 with ground	6
Metal Clad cable (MC)	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2 with ground	6
	10/3, 10/4 with ground	5
Armored Cable (AC)	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2 with ground	6
	10/3, 10/4 with ground	5
Flexible Cable (BX)	5/16"	6
	3/8"	5



Push support onto stud



Support stays mounted to stud while securely attached with one screw



Insert cables to be secured




Once cables are inserted, wrap zip-tie around the end of the support to secure the cables

# Ruff-IN components - accessories

## Cable support

- For use on wood or metal stud
- Allows cables to be positioned a minimum of 1 1/4" from face of stud as required by NEC Article 300.4(D)

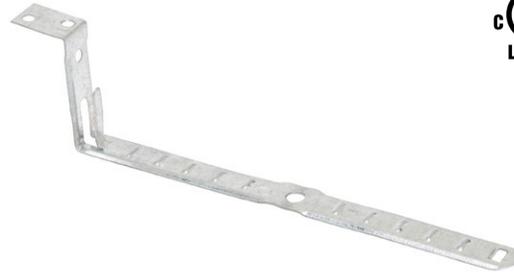

UPC/part number	Catalog #	Description	Box qty.
79903862843	<b>BRCJ</b>	Cable support	100

Surface	Cable type	Size	Cable capacity
Wood	Non-Metallic cable (NM)	14/2, 14/3, 12/2, 12/3, 10/2, 10/3, with ground	Max 6
		8/2, 6/2 with ground	Max 4
Metal stud	Metal Clad cable (MC)	14/2, 14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3, 10/4 with ground	Max 4
Furring strip & hat channel	Armored Cable (AC)	14/3, 14/4, 12/2, 12/3, 12/4, 10/2, 10/3, 10/4 with ground	Max 4
Furring strip & hat channel	Flexible Cable (BX)	5/16" & 3/8"	Max 4
Metal stud (Canada only)	Non-Metallic sheathed cable	14/2, 14/3, 12/2, 12/3, 10/2, 10/3, with ground	Max 4



**Notes:** Read safety/installation instruction sheet in packages before use.

## Heavy duty box hanger

- Supports octagonal or square boxes on 24" span
- Bendable ends mount 1 1/2" or 2 1/8" deep boxes without tools
- Self-centering feature positions box on center
- Includes BA50C4T box mounting clip
- Ultimate static load capacity: 50 lbs. (without dedicated dropwire)
- Static load capacity: 70 lbs. (with dedicated dropwire) 35 lbs. Canada
- Finish: pre-galvanized



**BA50**



**BA50D**



**BA50A**

UPC/part number	Catalog #	Description	Box qty.
78101196490	<b>BA50</b>	Box hanger	25
78101196491	<b>BA50D</b>	Box hanger for box with 1 1/2" extension	25
78205118460	<b>BA50A</b>	Adjustable box hanger for T-bar	10


# Ruff-IN components - catalog tree

Catalog numbering system for Ruff-IN assembly configurations




Part number example

**PFTHFA-4Q10ARC20DTRW**

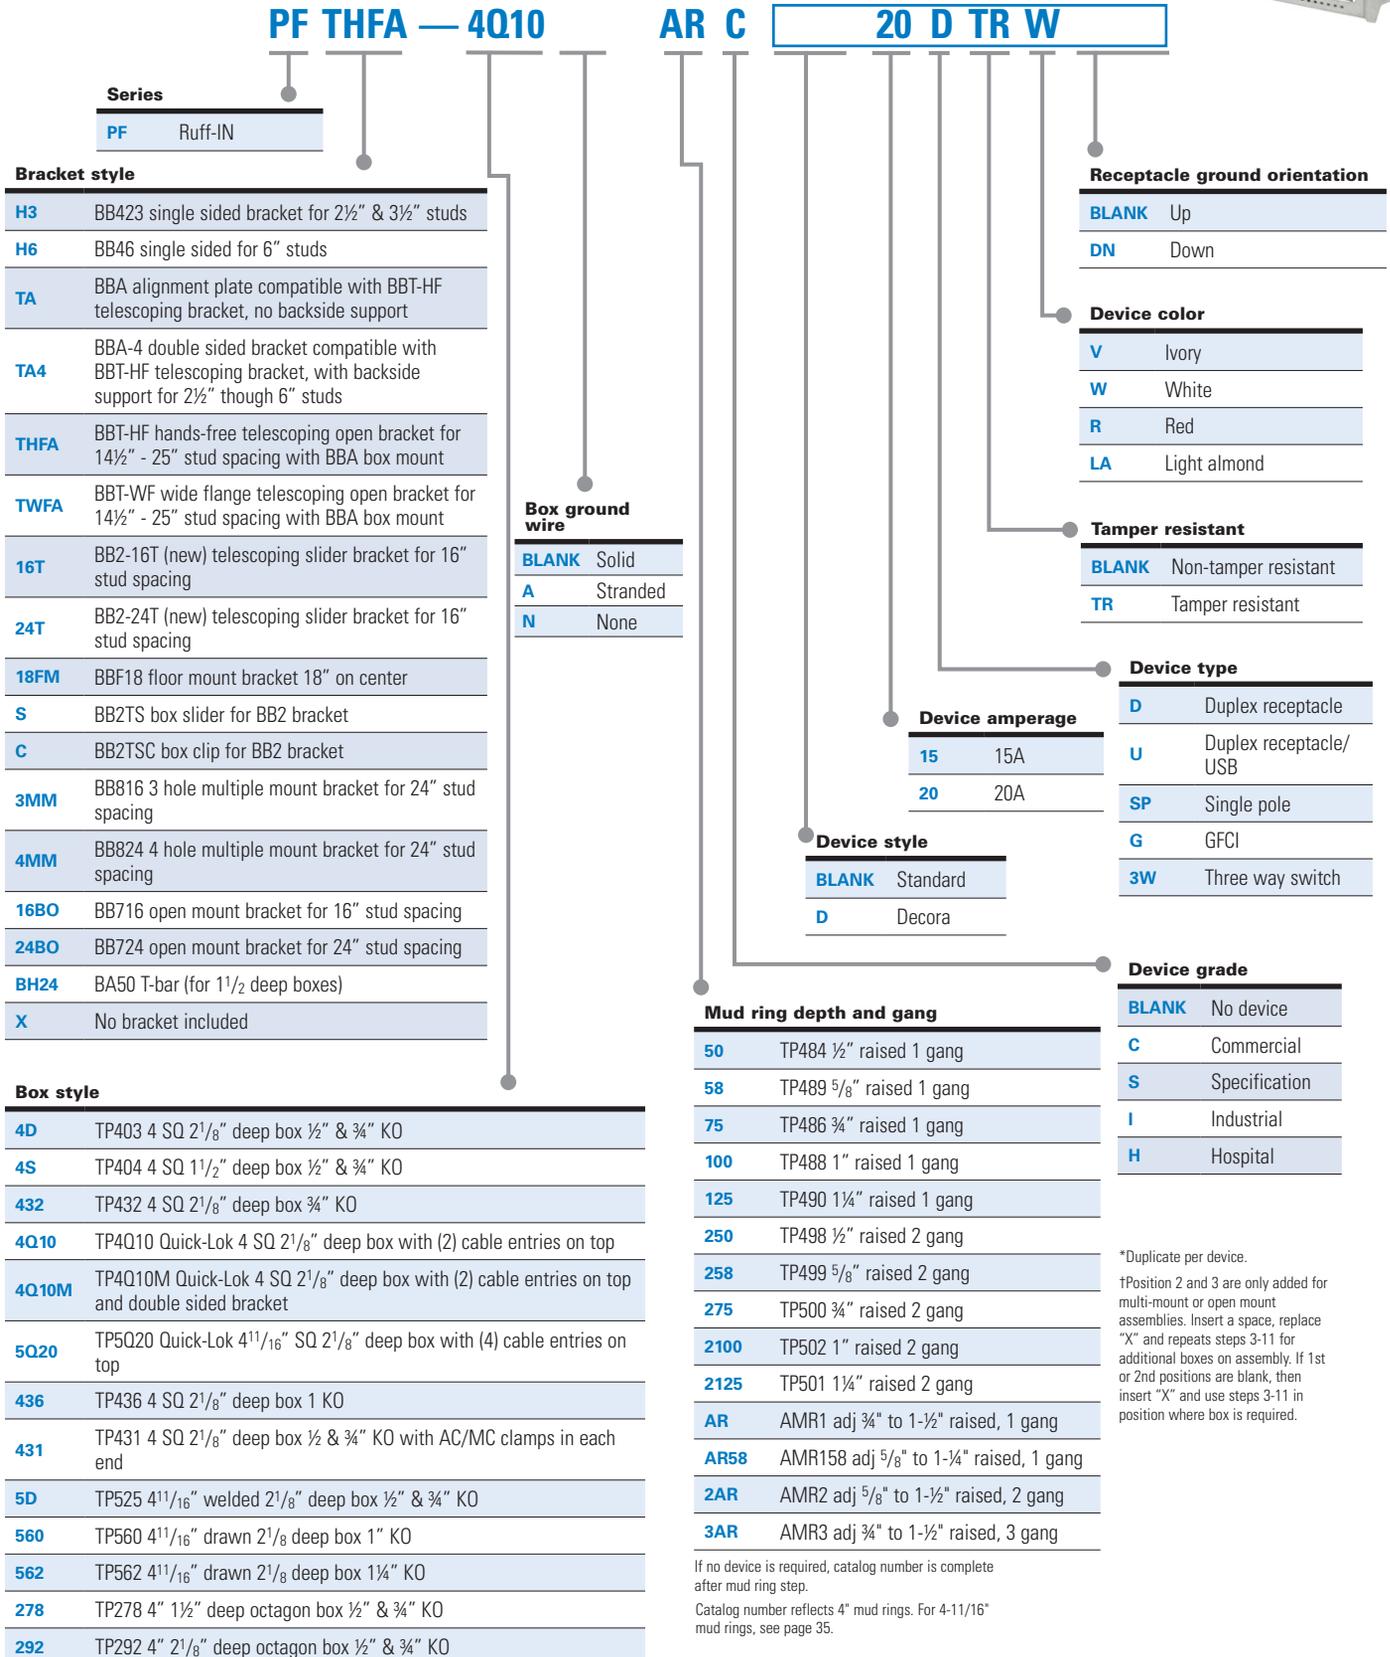


# Ruff-IN components - catalog tree

Catalog numbering system for Uni-Mount™ assemblies with wiring devices

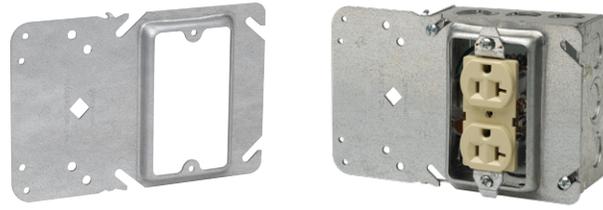

Part number example  
**TP31-4DC20DV**

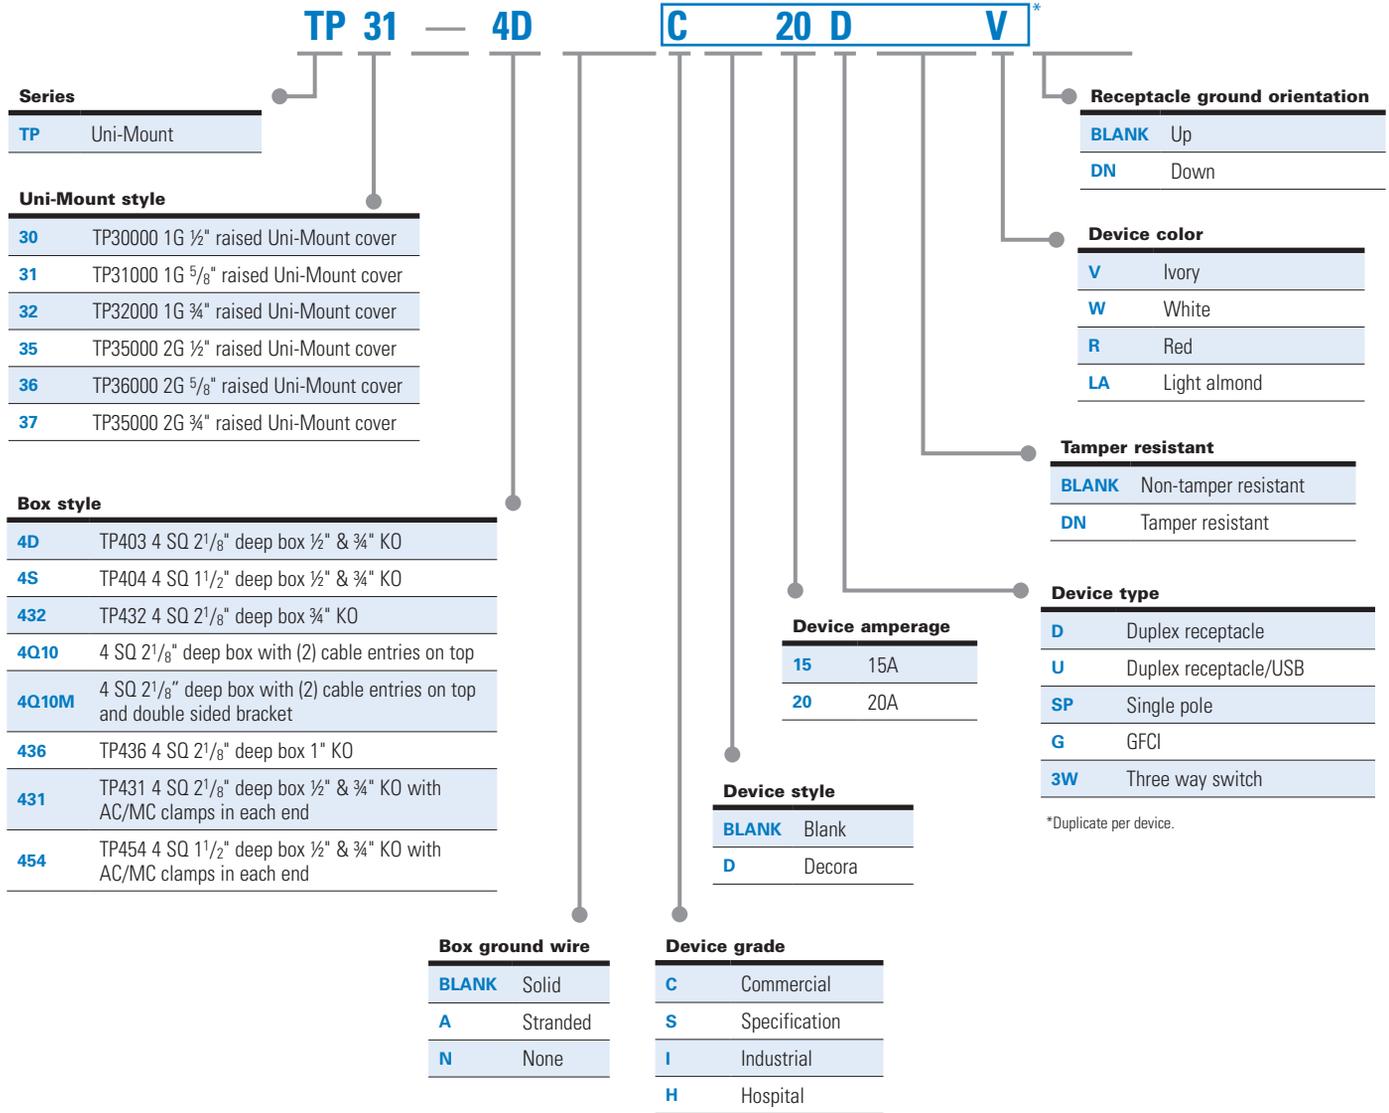

\*Duplicate per device.

# Ruff-IN component listing - brackets

## Listing key:

Designation for  
Ruff-IN assembly  
part number



Component  
catalog  
number

**H3 - BB423**

## Brackets

**H3 - BB423**



**3DS - BB73**




**16TS - BB216TS**



**24B0 - BB724**



**H4 - BB44**



**4DS - BB74**




**24TS - BB224TS**



**BH24 - BA50**




**H6 - BB46**

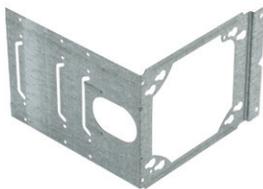


**6DS - BB76**




**3MM - BB816**

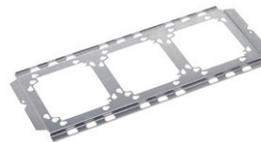

**30 - TP3000**



**TA - BBA**




**THFA - BBT-HF**



**4MM - BB824**



**18FM - BBF18**

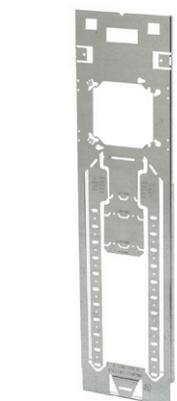

**TA4 - BBA-4**



**TWFA - BBT-WF**




**16B0 - BB716**



# Ruff-IN component listing - boxes

## Listing key:

Designation for  
Ruff-IN assembly  
part number

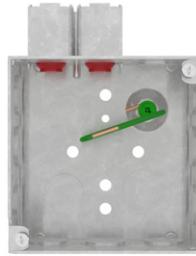

Component  
catalog  
number

**4Q10 - TP4Q10PF**

## Boxes

**4D - TP403**



**4Q10M - TP4Q10MPF**



**5D - TP525**



**278 - TP278**



**4S - TP404**



**5Q20 - TP5Q20**



**560 - TP560**



**292 - TP292**



**432 - TP432**




**436 - TP436**



**562 - TP562**



**4Q10 - TP4Q10PF**



**431 - TP431**



# Ruff-IN components - mud rings

## Listing key:

Designation for  
Ruff-IN assembly  
part number



Component  
catalog  
number

**AR - AMR1**

## Mud rings - 4" boxes

**50 - TP484**



**125 - TP490**



**2100 - TP502**



**AR - AMR1**



**58 - TP489**



**250 - TP498**



**2125 - TP501**



**AR - AMR158**



**75 - TP486**



**258 - TP499**



**2AR - AR2**



**100 - TP488**



**275 - TP500**



# Ruff-IN components - mud rings

## Listing key:

Designation for  
Ruff-IN assembly  
part number



Component  
catalog  
number

50 - TP574

## Mud rings - 4<sup>11</sup>/<sub>16</sub>" boxes

50 - TP574



125 - TP582



275 - TP586



AR - AMR51



58 - TP576



250 - TP583



2100 - TP589



2AR - AMR52



75 - TP579



258 - TP587



2125 - TP593



100 - TP578





**U.S. (global headquarters):  
Eaton's Crouse-Hinds, B-Line  
and Oil and Gas business**

1201 Wolf Street  
Syracuse, NY 13208

(866) 764-5454  
FAX: (315) 477-5179  
FAX Orders Only:  
(866) 653-0640

[crousecustomerctr@eaton.com](mailto:crousecustomerctr@eaton.com)

**For more information:**

If further assistance is required, please contact an authorized Eaton Distributor, Sales Office, or Customer Service Department.

**Canada**

Toll Free: 800-265-0502  
FAX: (800) 263-9504  
FAX Orders only: (866) 653-0645

**Mexico/Latin America/Caribbean**

52-555-804-4000  
FAX: 52-555-804-4020  
[ventascentromex@eaton.com](mailto:ventascentromex@eaton.com)

**Europe (Germany)**

49 (0) 6271 806-500  
49 (0) 6271 806-476  
[info-ex@eaton.com](mailto:info-ex@eaton.com)

**Eaton Middle East**

9714-8066100  
FAX: 9714-8894813  
[chbl-me@eaton.com](mailto:chbl-me@eaton.com)

**Singapore**

65-6645-9888  
FAX: 65-6297-4819  
[chsi-sales@eaton.com](mailto:chsi-sales@eaton.com)

**China**

86-21-2899-3600  
FAX: 86-21-2899-4055  
[echsales@eaton.com](mailto:echsales@eaton.com)

**Korea**

82-2-3484-6783  
82-2-3484-6778  
[ECHKsales@eaton.com](mailto:ECHKsales@eaton.com)

**Australia**

61-2-8787-2777  
FAX: 61-2-9609-2342  
[Crousehindsanz@eaton.com](mailto:Crousehindsanz@eaton.com)

**India**

91-124-4683888  
FAX: 91-124-4683899  
[cchindia@eaton.com](mailto:cchindia@eaton.com)

**Eaton's Global Energy Infrastructure Solutions  
Crouse-Hinds series and B-Line series products**  
1201 Wolf Street  
Syracuse, NY 13208  
[Eaton.com](http://Eaton.com)

**Eaton**  
1000 Eaton Boulevard  
Cleveland, OH 44122  
United States  
[Eaton.com](http://Eaton.com)

© 2025 Eaton  
All Rights Reserved  
Printed in USA  
Publication No. BR406006EN  
April 2025

Eaton is a registered trademark.  
All other trademarks are property of their respective owners.

**For additional information,  
visit [Eaton.com](http://Eaton.com)**