

FRC SERIES

ARCHITECTURAL HEAVY-DUTY WALL HEATER

**IDEAL SPACES**

- Vestibules
- Entrance Ways
- Lobbies
- Hallways
- Stairwells
- Restaurants
- Conference Rooms
- Offices
- Basements
- Family Rooms

COLORS

- Northern White
- Statuary Bronze

DIMENSIONS

- Grille: 19-5/16"H x 15-3/4"W x 1-1/4" D
- Back Box: 18-1/4"H x 14-3/8"W x 3-7/8" D

TEMP RANGE

- 40°-90°F

CFM

- 100



STATUARY BRONZE
& NORTHERN WHITE

- BMS-compatible through an optional relay
- Contemporary bar-stock grille designed to provide optimized airflow
- Manual reset thermal overheat protector disconnects power in the event of accidental blockage
- Built-in tamper-resistant thermostat
- All units have a permanently lubricated and enclosed fan motor, which creates long life, low maintenance, and gently distributes warmth throughout the area
- Automatic fan delay eliminates cold drafts on start-up and discharges residual heat from the heater body during shut down
- Power on/off switch for added safety during maintenance

www.berkomep.com

For Technical Services, Call 800-642-4328

ITEM# BFLY_FRC_1217-1

BERKO[®]
A Marley Engineered Products Brand

FRC SERIES ARCHITECTURAL HEAVY-DUTY WALL HEATER


MODELS & SPECIFICATIONS

CATALOG NO.	UPC	VOLTS	WATTS	AMPS	PHASES	BTU/HR.	SHIP WT. (LBS.)
FRC1512F	6 85360 16187 7	120	1500	12.5	1	5118	25
FRC1812F	6 85360 16189 1	120	1800	15	1	6142	25
FRC4020F	6 85360 16211 9	208	4000/2000	19.2 / 9.6	1	13,649/6824	25
FRC4024F	6 85360 16199 0	240	4000/2000	16.7/8.3	1	13,649/6824	25
		208	3000/1500	14.4 / 7.2		10,236/5118	
FRC4027F	6 85360 16207 2	277	4000/2000	14.4 / 7.2	1	13,649/6824	25
		240	3000/1500	12.5/6.3		10,236/5118	
FRC4307F	6 85360 16475 5	277	3000/1500	10.8 / 5.4	1	10,236/5118	25
FRC4303F	6 85360 16403 8	347	3000	8.6	1	10,236	25
FRC4306F	6 85360 16406 9	600	3000	5	1	10,236	25
FRC4506FC	6 85360 16414 4	600	4800	8	1	16,378	25
FRC4820F	6 85360 16231 7	208	4800	23.1	1	16,378	25
FRC4824F	6 85360 16219 5	240	4800	20	1	16,378	25
		208	3600	17.3		12,284	
FRC4827F	6 85360 16227 0	277	4800	17.3	1	16,378	25
		240	3600	15		12,284	
FRC4503F	6 85360 16411 3	347	4800	13.8	1	16,378	25
FRC40203F	6 85360 16215 7	208	4000	11.1	3	13,649	25
FRC48203F	6 85360 16235 5	208	4800	13.3	3	16,378	25
FRC40243F	6 85360 16203 4	240	4000	9.6	3	13,649	25
FRC45043F	6 85360 16476 2	240	4800	11.6	3	16,378	25

NOTE: *Factory-wired for higher wattage, field-convertible to half wattage. Standard finish is Statuary Bronze; For Northern White, add NW suffix to catalog number. Allow two weeks delivery for models with Northern White finish.

ACCESSORIES

CATALOG NO.	UPC	DESCRIPTION	SHIP WT. (LBS)
FRPE*	6 85360 02822 4	Pneumatic/Electric switch. Factory set at 10 PSIG to "make" on pressure drop. May be field wired to "break" on pressure drop. Pressure set point adjustable to 30 PSIG. (field-installed)	2
FRR2 (24V)*	6 85360 03036 4	Time delay relay 40-60 seconds to close when energized. Use 120V or 24V power supply from remote source (field-installed)	2
FRR12 (120V)*	6 85360 03035 7		
FRS1PB	6 85360 03040 1	1 in. deep surface mounting frame for semi-recessed installation, Statuary Bronze	2
FRS2PB	6 85360 03042 5	2 in. deep surface mounting frame for semi-recessed installation, Statuary Bronze	2
FRSMPB	6 85360 03038 8	Surface mounting frame for surface installations. Painted to match heater decor, 3-13/16 in. deep, Statuary Bronze	5
VFKSFCNW	6 85360 07466 5	14-gauge security front cover, Northern White	6

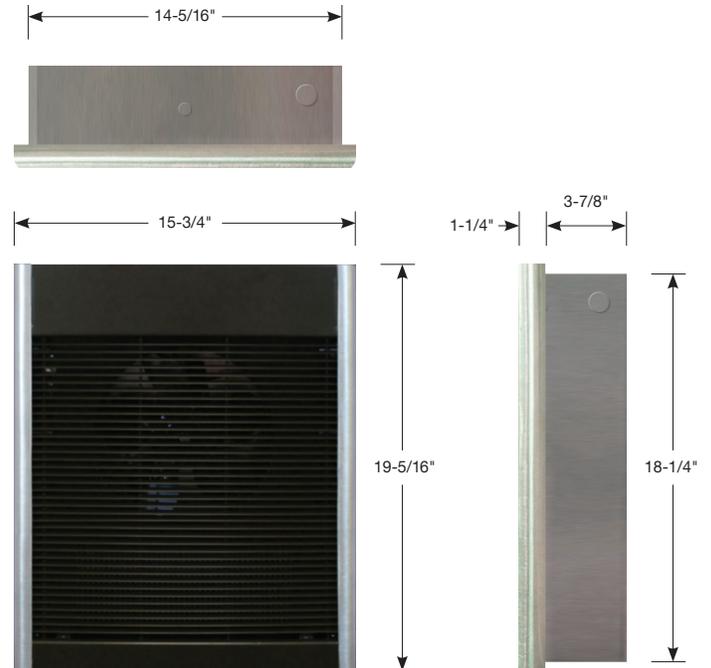

NOTE: * Will accommodate pneumatic/electric or low-voltage controls commonly used with computerized energy management systems. Mounting Limitations: For wall mounting, do not install back box closer than 8 in. from floor or adjacent wall. Do not install heater behind towel rack, behind door, in floor, in closet, in ceiling or where air flow may be obstructed. All controls are concealed behind the front cover making them essentially tamper proof.