ACCOMMODATE[) CONNECTORS		
MRE 1022B 7			
UNINSULATED TERMINALS			
AND SPLICES			
TERMINALS:	SPLICES:		
T- (YAD-)	YSV-		
TF- (YAD-F)	YSV-H <2		
YAV-	7		
Y A V - H <2			
YAV-R			
YAV-T-F			
YAV-H-F <2			
YAV-Z			
MRF1022NV 7			
NYLON / VINYL INSULATED			
TERMINALS AND SPLICES			
TERMINALS	SPLICES:		
TP- (BA-)	SP- (BS-)		
TP-F (BA-EF)	SNM- (YSES-)		
TP-Z (BA-EZ)	YSE-HN		
TP-LF (BA-EL)	YSE-H		
TN- (YAES-)	QN-F-		
TN-F (YAES-F)	QN - M -		

G-DIMENSIONS AND INSPECTION GAGES				
TOOL CAT. NO.	DIE GROOVE	G-DIM	GAGE CAT. NO.	
MRE 1 0 2 2 B	#22-#14	.055 [1] .073 [2]	PG-403-2R	
	#12-#10	.100 [3]	PG-403-IR	
MRE1022NV	#22-#18 (RED)	.084 [2] .092 [2]	PG - 406 - I	
	#16-#14 (BLUE)	.102 [3]	PG - 407 - I	
	#12-#10 (YELLOW)	. 3 [3]	PG-408-1	

NOTES:

Y A E - N -

YAE-Z YAEV-

Y A E - N - F

I. MATERIAL: FRAME: STEEL

QP-F-

QP-M-

HANDLES: OVERMOLDED RUBBER DIES: STAINLESS STEEL

DIES PROVIDE CONDUCTOR CRIMP ONLY ON THESE CONNECTOR FAMILIES.


3. LONG HANDLES AND TEXTURED OVERMOLDED GRIPS PROVIDE LOWER HANDLE FORCE AND INCREASE ERGONOMICS.

4. PRODUCT WEIGHT: 1.3 LB (0.6 KG)

5. CATALOG NUMBERS MRE1022B AND MRE1022NV BOTH HAVE A FIVE-YEAR LIMITED WARRANTY.

DIMENSIONS IN BRACKETS [] ARE IN MILLIMETERS ROUNDED TO THE NEAREST MILLIMETER AND ARE FOR REFERENCE ONLY.

TERMINALS AND SPLICES SHOWN IN "ACCOMMODATED CONNECTORS" TABLE, WHEN USED WITH APPROPRIATE WIRE SIZE (SEE "G-DIMENSION AND INSPECTION GAGES") ARE UL LISTED PER UL486A/B.

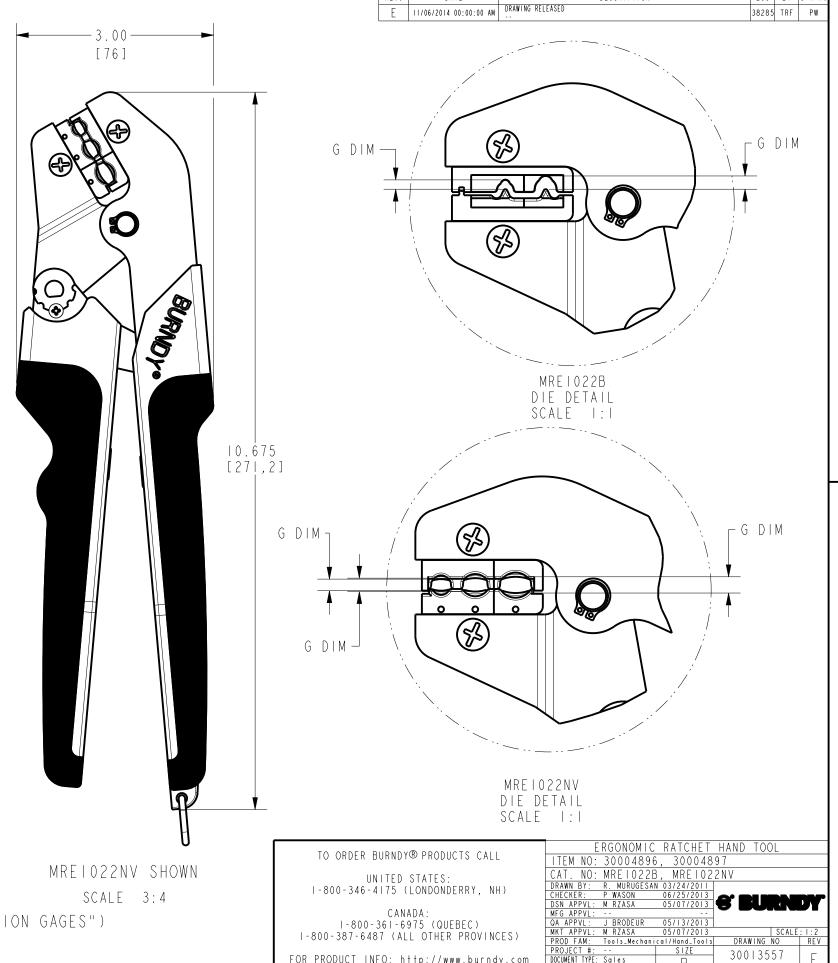

FOR PRODUCT INFO: http://www.burndy.com