




YCS37R, Aluminum Sleeve, Staked Cable Stop

By Burndy
Catalog # [YCS37R](#)

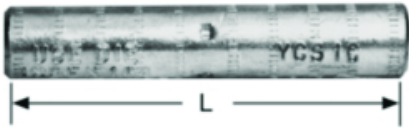

HYSPLICE AL sleeve with staked cable stop, designed to withstand jumper loop tensile and vibration stresses. ANSI C119.4 CLASS 2 (PARTIAL TENSION), Index:261.

Application

For ACSR, All Aluminum, 6201, 5005 And Compressed Conductors

General

Catalog Number	YCS37R
Connector Type	Splice
Die Index	261
EU RoHS Indicator	Yes
Material	Aluminum
Plated	N
Plating Type	Unplated
Prefilled Oxide Inhibitor	Y
Sub Brand	HYSPLICE
Trade Name	HYSPLICE™
Type	YCS-R
UPC	781810015063
UPC 12 Digit	7818100150633

Dimensions

Dimension - B Length fraction	4-22/71 in
Dimension - B Length inch	4.31 in
Dimension - L Length Overall mm	222 mm
Dimension - Length Overall inch	8.75 in

Conductor Related

Conductor - AAAC 5005 Size	559.5 (19)
Conductor - AAAC 5005 Size Range	559.5 (19)
Conductor - AAAC 6201 Size	559.5 (19)
Conductor - AAAC 6201 Size Range	559.5 (19)
Conductor - ACSR Str Size	477.0 (24/7) Flicker;477.0 (26/7) Hawk;477.0 (30/7) Hen
Conductor - ACSR Str Size Range	477.0 (24/7) Flicker-477.0 (30/7) Hen
Conductor - AL Str Size	556.5
Conductor - AL Str Size Range	556.5

Certifications And Compliance

Certification - CSA Approved	No
Certification - ETL	No
Certification - UL Recognized	No
Certification - cULus	No
Standards - RoHS Compliance Status	CM
UL Listed	No

Logistics

Carton Quantity	20
Minimum Pack Quantity	1
Pallet Quantity	2880

Product Assets

[Catalogs - Full Line BURNDY Catalog](#)
[Catalogs - Section H - Overhead Distribution](#)
[Customer Notices - Prop 65 Notice](#)
[Product Cross Section Image\(s\) - BUR_YCS-R_LineArt](#)
[Sales Drawings - 50115707](#)



A proud member of the Hubbell Family.