

PVC COATED COUPLINGS

Features:


- Exterior PVC coating thickness is a minimum 0.040"
- Interior urethane coating thickness is a minimum 0.002"
- Sealing sleeves on both ends
- All couplings have straight threads (not tapered)
- Galvanized Rigid Couplings

Applications:

Allied Tube & Conduit® PVC Coated Rigid Couplings are supplied with PVC sleeves on both ends to ensure corrosion protection for the entire system.

Standards:

- Ferrous electrical conduit with PVC coating: File # DYJC.E226472

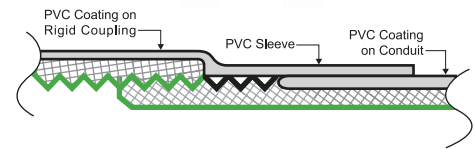

Part Number	Trade Size (in)	Metric Size (mm)	Length of Metal (in)	Threads per Inch	Weight per 100 (lbs)	Box Qty
PV0500CP00	½	16	1.500	14	19	100
PV0700CP00	¾	21	1.532	14	32	90
PV1000CP00	1	27	1.906	11½	40	75
PV1200CP00	1¼	35	1.906	11½	50	42
PV1500CP00	1½	41	1.906	11½	69	38
PV2000CP00	2	53	1.937	11½	93	30
PV2500CP00	2½	63	2.878	8	123	17
PV3000CP00	3	78	3.031	8	217	14
PV3500CP00	3½	91	3.094	8	422	11
PV4000CP00	4	103	3.188	8	391	11
PV5000CP00	5	129	3.374	8	550	8
PV6000CP00	6	155	3.437	8	884	5

All dimensions are for informational purposes only *Tolerances +/- 5%



For more info visit alliedeg.us 