

Datasheet

2435KIT - Heavy Duty Door Strike

Product description

The 2435Kit completes with five heavy duty stainless steel faceplates, is designed for mortise and cylindrical locksets. It is reversible for left hand or right hand installation and operates at 12 and 24 VDC.

Specifications

VOLTAGE	12/24 VDC
CURRENT	250 mA/12 VDC, 150 mA/24 VDC
STATIC STRENGTH	1000 LB (454 KG)
DYNAMIC STRENGTH	33-ft-lbs. (4.56 m-kgs)
DIMENSION	3 5/16" (4 5/8") x 1 5/8" x 1 13/16"
Latch Throw	1" max with 1/8" door gap


Key features

- Heavy duty stainless steel construction
- Vertical adjustments allow for alignment with a wide variety of mortise locks with offset latches
- Non-handed fully reversible
- Dual voltage: 12/24 VDC (VAC for intermittent use, not exceeding 10 seconds)
- Endurance testing: 1,000,000 cycles tested
- Sliding keeper shim design for up to 1/8" (3 mm) adjustment for misaligned frames




Faceplates dimensions

Deadbolt Latch Installation

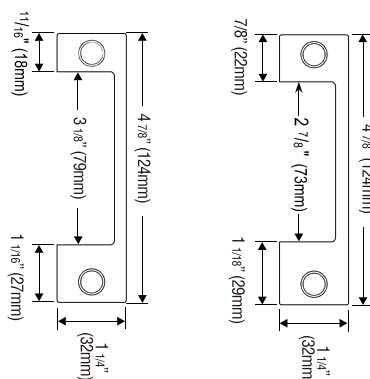

Latchbolt Installation

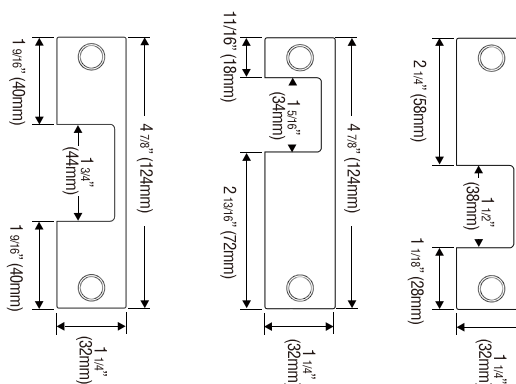

All the information contained within this document (pictures, drawing, features, dimensions, specifications), could be perceptibly different and can be changed without prior notice. - March 2023 - ROFU_2435KIT_DS_01_EN_LETTER_C