

## Datasheet

### ISO25 - Printable ISO Card

#### Product Description

The ISO25 is a thin, printable PVC card. It contains a 125 kHz RFID chip. This affordable RFID proximity solution is ideal for any standard access control project.

CDVI offers a variety of access control credentials with different technologies (125 kHz proximity or MIFARE®) You'll find the ideal credentials to meet the needs of your installation. You can also customize our CDVI cards and tags with your own company logo (minimum order of 1,000 units).



#### Key Features

- Compatible with CDVI Wiegand readers
- 125 kHz proximity card
- Pack of 25 cards
- Printable on both sides
- Sequential decimal number on each card


 Certification

 DEEE

**RoHS** Certification

## Product Specifications

<b>Material:</b>	PVC
<b>Technology:</b>	CDVI 26-bit encoding
<b>Frequency:</b>	125 kHz
<b>Security level:</b>	Standard
<b>Weight:</b>	0.1 oz, 4 g

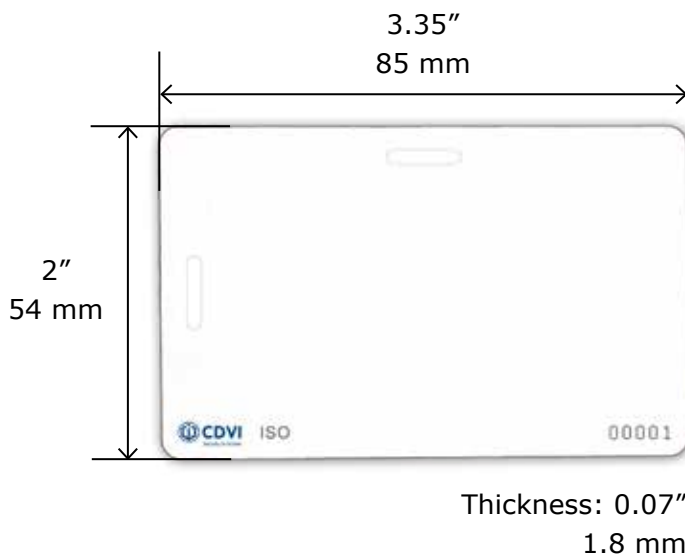

## Also available in these technologies



### ISOH25

HID 26-bit 125 kHz



### ISOM25

MIFARE® Classic 1K 13.56 MHz



### ISODT25

Dual-Tech  
CDVI 125 kHz & DESFire® EV2