

Datasheet

NANOPB - Mini Proximity Reader

Product Description

The NANO from CDVI is a mini and compact proximity card reader.

As with the other readers from the range (STAR, SOLAR and SOLARK), the NANO gives an anytime status of the door through multi-colored LED's.

These access control readers have a high performance read range and are easy to mount.

DIGIPROX 



Key Features

- Award winning innovative design
- Reads CDVI cards only
- PCB Sealed in epoxy
- Audible and visual feedback
- Multicolored LED



Certification



Certification



DEEE

RoHS

Certification



IP53




-13°F to 158°F
(-25°C to 70°C)

Product Specifications

Material:	Polycarbonate
Mounting:	Surface
Technology:	Proximity 125 kHz
Security level:	Standard
Wiegand	26, 30 or 44 bits
Read range:	Up to 2" (5 cm)
Weight:	1.4 oz, 40 g

Electrical Specifications

Power input:	12V DC
Consumption:	100 mA

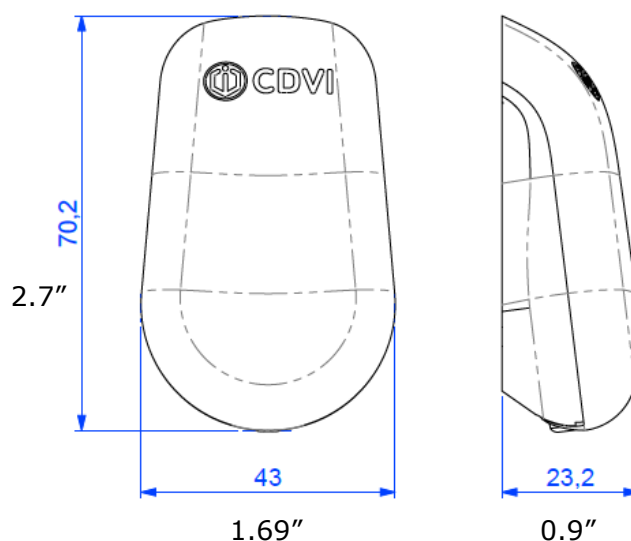

Accessories



ISO25

Printable ISO Card (125 kHz)



CS25

Clamshell Card (125 kHz)



BTAG25

Blue Key Tag (125 kHz)