

**FEATURES**

APPLICATIONS

- For luminaires where lights are to be on continuously (shorting cap) or left off (open cap)

**SPECIFICATIONS**

DESIGN DETAILS

- MOV Rated for 265Joule/6000 Amp (VBK shorting cap only)
- Neoprene Base Gasket has a continuous use temperature of 105°C
- Polypropylene Cover
- Brass Legs

OPERATING CHARACTERISTICS

- Voltage 105 to 530 VAC, 50/60Hz
- -40 to +70°C ambient
- Exceeds ANSI C136.10-1996

**Warranty**

Six-year limited warranty. Complete warranty terms located at:  
[www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

**Note:** Actual performance may differ as a result of end-user environment and application.  
 Specifications subject to change without notice.




*CAP Series*  
*Shorting and Open*

**DSHORT - Shorting Cap**



**DOPEN - Open Cap**

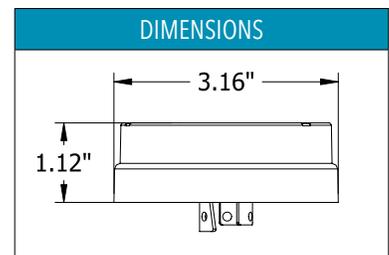

ORDERING INFORMATION

CAP Series		Example: DSHORTVBK J50	
Series & Voltage	Surge Protection	Pkg. Qty.	
DSHORT Shorting Cap, Continuously On	SBK Shorting Cap, Black cover	U	1 Unit
DOPEN Open Cap, Continuously Of	VBK Shorting Cap, 265J MOV, Black cover	J50	50 Units
	SRD SRD Open Cap, Red cover		