


<b>DATA SHEET</b>	10170000
<b>EPIC® H-BS 6 SS / H-BS 6 BS Screw termination</b>	Valid from: 10.07.2015

## Description

- Inserts for high currents.
- High rating for currents up to 35 A
- Screw termination up to a conductor cross section of 6 mm<sup>2</sup>

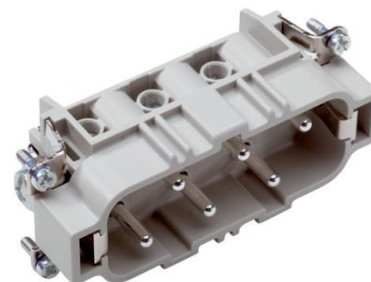

## General Characteristics

Series	H-BS 6
Version	Male/Female(Article 10171000)
Wire protection	Yes
Number of Contacts	6 + PE
Contacts	1-6
Termination Methods	Screw termination: 0.5 - 6 mm <sup>2</sup>
Temperature Range	-40°C to +100°C, short-term up to +125°C

## Mechanical Characteristics

Cycle of mechanical operation	100
-------------------------------	-----

## Electrical Characteristics

Rated Voltage, IEC	500 V
Rated Voltage, UL	600 V
Rated Voltage, CSA	600 V
Rated Impulse Voltage	Conductor - conductor: 690 V
Rated Current, IEC	6 kV
Rated Current, UL	35 A
Rated Current, CSA	35 A
Contact Resistance	35 A
Degree of Soiling	< 2 mOhm
	3

## Materials and Surfaces

Contacts	Copper alloy, hard silver-plated
Insulating Body	PC
Flammability Class according to UL 94	V0

## Approvals



UL-Approval, E-File-Number	E75770
VDE-tested, VDE-REG. no.	B437

## Standard

Product Standard	IEC 61984, UL 1977
------------------	--------------------

Creator: MANU2/PDP Released: IVSE1/PDP	Document: DB10170000EN Version: 00	Page 1 of 3
---	---------------------------------------	-------------

## Technical Drawings

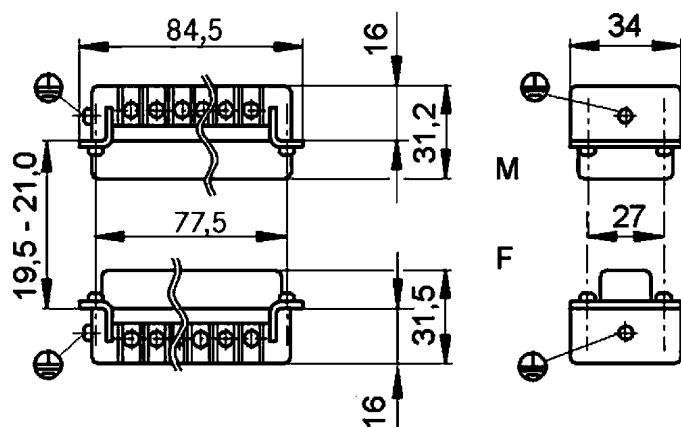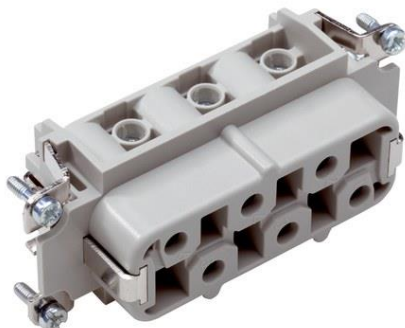

Industrial machinery and plant engineering



Robust



Temperature-resistant

### Info

Standard insert for currents up to 35A

### Application range

Plant engineering  
Mechanical engineering  
Drive systems



<b>DATA SHEET</b>	10170000
<b>EPIC® H-BS 6 SS / H-BS 6 BS Screw termination</b>	Valid from: 10.07.2015

**Remark**

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: MANU2/PDP Released: IVSE1/PDP	Document: DB10170000EN Version: 00	Page <b>3</b> of <b>3</b>
---	---------------------------------------	---------------------------

We reserve all rights according to DIN ISO 16016.