

<b>DATA SHEET</b>	10440000
<b>EPIC® H-A 10 SS / H-A 10 BS</b>	Valid from: 07.07.2015

## Description

- H-A inserts with screw termination up to 2.5 mm<sup>2</sup> wire cross section.
- Slim connector insert for standard application.
- Easy to service screw connection.
- Universal for current and voltage transmission.



## General Characteristics

Series	H-A 10
Version	Male/Female(Article 10441000)
Wire Protection	No
Number of Contacts	10+PE
Termination Methods	Screw termination: 0.5 - 2.5 mm <sup>2</sup> (2.5 mm <sup>2</sup> with conductor end sleeves depending on the crimping profile)
Temperature Range	-40°C to +100°C, short-term up to +125°C

## Mechanical Characteristics

Cycle of mechanical operation	100
-------------------------------	-----

## Electrical Characteristics

Rated Voltage, IEC	250 V
Rated Voltage, UL	600 V
Rated Voltage, CSA	600 V
Rated Impulse Voltage	4 kV
Rated Current, IEC	16 A
Rated Current, UL	14 A
Rated Current, CSA	16 A
Contact Resistance	1,5 - 4 mOhm
Degree of Soiling	3

## Materials and Surfaces

Contacts	Copper alloy, hard silver-plated
Insulating Body	PBT
Flammability Class according to UL 94	V0

## Approvals

UL-Approval, E-File-Number	E75770
VDE-Approval, VDE-REG.-Nr.	B437




## Standard

Product Standard	IEC 61984, UL 1977
------------------	--------------------

Creator: MANU2/PDP Released: IVSE1/PDP	Document: DB10440000EN Version: 00	Page 1 of 3
---	---------------------------------------	-------------

<b>DATA SHEET</b>	10440000
<b>EPIC® H-A 10 SS / H-A 10 BS</b>	Valid from: 07.07.2015

## Technical Drawings

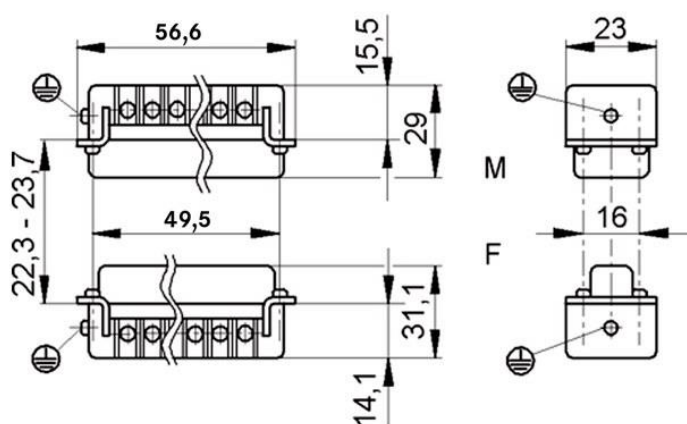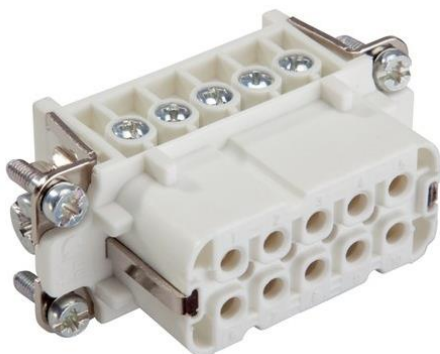



<b>DATA SHEET</b>	10440000
<b>EPIC® H-A 10 SS / H-A 10 BS</b>	Valid from: 07.07.2015



Industrial machinery and plant engineering



Assembly time



Space requirement

#### Info

Slim standard insert, easy to connect by screw  
Universal for current and voltage transmission

#### Application range

Machine and equipment manufacturings  
Control engineering

#### Remark

Photographs are not to scale and do not represent detailed images of the respective products.

Creator: MANU2/PDP Released: IVSE1/PDP	Document: DB10440000EN Version: 00	Page <b>3</b> of <b>3</b>
---	---------------------------------------	---------------------------

We reserve all rights according to DIN ISO 16016.