

► Model 371LEDX

Hazardous Location Commander® LED

360-Degree Rotating Warning Lights



Model 371LEDX hazardous location warning lights have an array of 12 powerful LEDs arranged below a reflector. The reflector focuses the light from the LEDs into a high-intensity beam and rotates 360-degrees.

The LEDs, reflector, and motor module are sealed under a polycarbonate dome which completes a water-tight, dust-tight enclosure. The dome and ring assembly simply screw on, providing access to the interior of the light.

The 371LEDX base is hard coat anodized and features electrostatically applied black powder paint for greater corrosion resistance. Wiring can be routed through the pipe-mount opening in the bottom of the light or the two side knockouts can be used for side entry wiring. Installation can be surface or 1-inch NPT pipe mounted.

FEATURES

- Available in 120VAC
- Available in five dome colors
- 50,000 hour LED light source
- Surface mount and integrated 1-inch NPT pipe mount
- Type 4X, IP66 enclosure
- Class I, Division 2, Groups A, B, C & D; Class II, Division 2, Groups F & G and Class II
- UL and cUL Listed


MODEL	VOLTAGE	OPERATING CURRENT	FLASH RATE/ MINUTE	CANDELA	MOUNT
371LEDX-120 *	120VAC 50/60Hz	320 mA	60	15,000	1" NPT Pipe/Surface

*Indicates color: (A) Amber, (B) Blue, (C) Clear, (G) Green or (R) Red

Hazardous Location Rating:

T-CODE AT MAXIMUM AMBIENT TEMPERATURE, °C	
HAZARDOUS LOCATION	40 °C
Class I, Div 2, Groups A, B, C, D	T5
Class II, Div 2, Groups F, G	T6
Class III	T6

Hazardous Location Commander® LED Light (371LEDX)

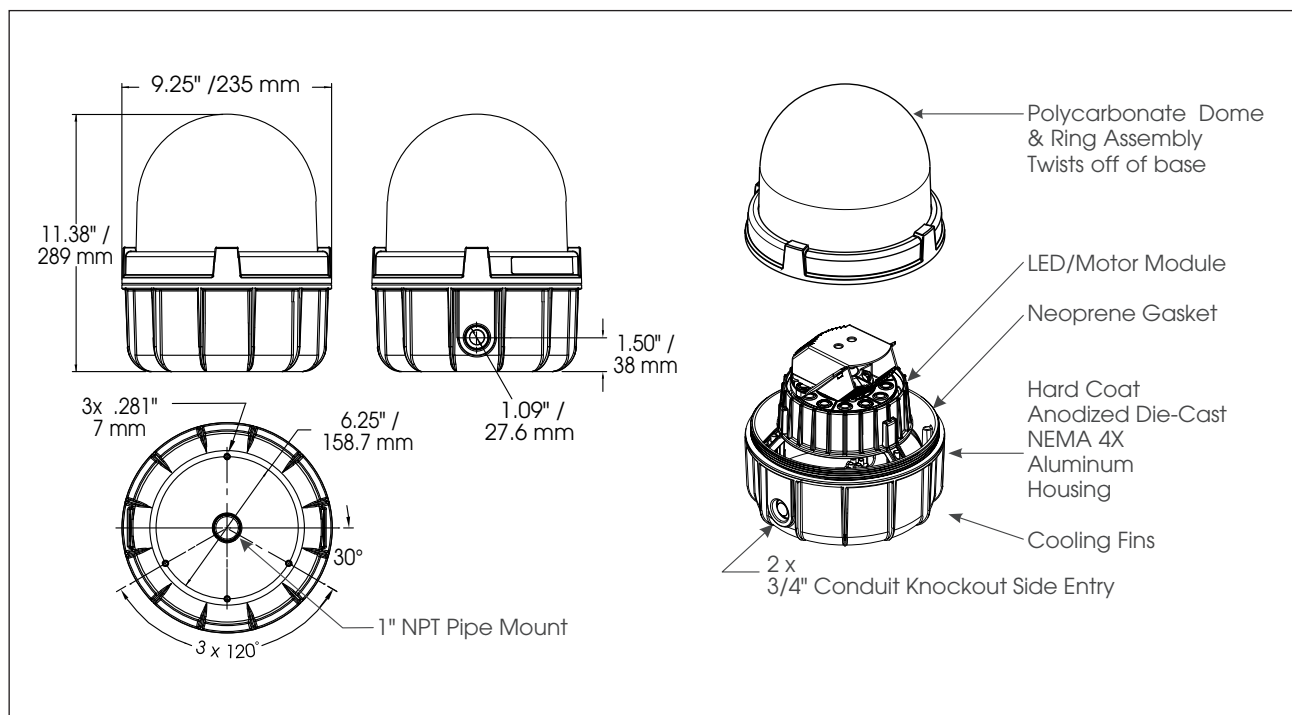

SPECIFICATIONS

Lamp Life:	50,000 Hours	50,000 Hours
Light Source:	LED Array	LED Array
Operating Temperature:	-31°F to 104°F	-35°C to 40°C
Net Weight:	7.1 lbs.	3.2 kg
Shipping Weight:	8.1 lbs.	3.7 kg
Height:	11.38"	288.9 mm
Diameter:	9.12"	231.8 mm

HOW TO ORDER

371LEDX

- 120

A

TYPE

371LEDX

VOLTAGE

120VAC
50/60Hz

COLOR

A Amber
B Blue
C Clear
G Green
R Red

REPLACEMENT PARTS

Description	Part Number
Series B Dome and Ring Assembly	
Amber Polycarbonate ¹	K8459125A-05
Blue Polycarbonate ¹	K8459125A-06
Clear Polycarbonate ¹	K8459125A-07
Green Polycarbonate ¹	K8459125A-08
Red Polycarbonate ¹	K8459125A-09
Gasket, Surface Mount	K8459127A
LED/Motor Module, Amber	K8459159A-A
LED/Motor Module, Blue	K8459159A-B
LED/Motor Module, White	K8459159A-W
LED/Motor Module, Green	K8459159A-G
LED/Motor Module, Red	K8459159A-R

¹ Includes 1 dome gasket

OPTIONAL ACCESSORIES

Description	Part Number
Solid Surface Mounting Bracket	371BRCKT
Shock Mount Kit	K8459A076C
3/4" Hub Kit	K8459138A
1" Plug Kit	K8459130A
22.5" Reflector	K8459154A



Rev. 020316