

Model	Voltage	Operating Current	Flash Rate/ Minute	Candela
-------	---------	-------------------	--------------------	---------

LSB – Base, cap kit included / LSBS – Low profile base, cap kit included

LSB-024-240	24-240VAC/DC	N/A	N/A	N/A
LSB-120	120VAC 50/60Hz	N/A	70	N/A
LSBS	24-240VAC/DC	N/A	N/A	N/A

LSL – Litestak® Incandescent status indicator, units may include up to five light modules

LSL-024 ¹ -*	24VDC	0.76 amps	N/A	123
LSL-120 ¹ -*	120VAC 50/60Hz	0.13 amps	N/A	123
LSL-240 ¹ -*	240VAC 50/60Hz	0.11 amps	N/A	123

LSLD- Litestak® LED lamp status indicator, units may include up to five light modules

LSLD-024 ¹ -*	24VDC	80 mA		
LSLD-120 ¹ -*	120VAC 50/60Hz	45 mA		

¹ Model LSL and LSLD includes lens, lamp and light module.

* Indicates color: (A) Amber, (B) Blue, (C) Clear, (G) Green or (R) Red

Model	Voltage	Operating Current	Decibels @	
			10'	1m

LSS – Litestak® sound module, combined with any Litestak, units may include up to four light modules

LSS-024	24VDC	180 mA	See page 23 of Catalog	
LSS-120	120VAC	70 mA	See page 23 of Catalog	

LSH – Litestak® piezoelectric horn sound module, units may include up to four light modules

LSH-024	24VDC	70 mA	75	85
LSH-120	120VAC	40 mA	77	87
LSH-240	240VAC	40 mA	75	85



FEDERAL SIGNAL
Safety and Security Systems

Advancing security and well being.

2645 Federal Signal Drive
University Park, IL 60484

Phone: 708.534.4756 Fax: 708.534.4852
www.federal-signal-indust.com



Hulley Road, Macclesfield
Cheshire SK10 2NF, UK

+44(0) 1625 66 66 00 Fax: +44(0) 1625 611 352

S³ short
selling
story

Models LSB, LSL, LSLD, LSS and LSH


Litestak® Status Indicator



- Superior 360° visual signaling
- Large diameter
- Increases productivity
- Process control environments


FEDERAL SIGNAL
Safety and Security Systems / Industrial
Advancing security and well being.

Litestak® Models LSB, LSL, LSLD, LSS and LSH

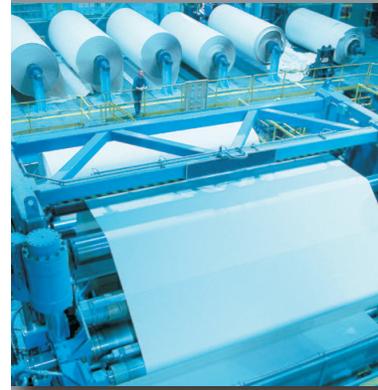

LiteStak®

- 24VDC, 120VAC and 240VAC
- Impact resistant fresnel lensing in 5 colors; amber, blue, clear, green, and red
- Snap-open lens for quick and easy maintenance and color resequencing
- UL and cUL Listed, CSA Certified
- Two mounting configurations: Surface mount and integrated 3/4" pipe mount
- Sound module available to make this a combo audible/visual signal

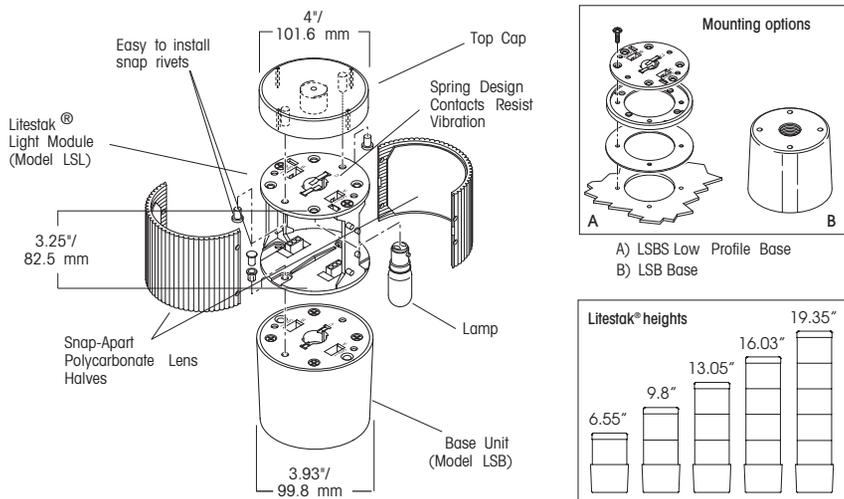

Features

- Compact and bright
- Multiple mounting configurations, voltages, and colors
- Designed for the industrial market
- Five colors available
- 5-year warranty

Benefits

- Brightest status indicators
- Ability to add audible signal
- High performance in a small package
- Versatile mounting
- User friendly installation and maintenance

Applications

- Assembly lines
- Instrument panels
- Work cells
- Process controlled manufacturing

Possible Customers

- OEM
- MRO
- Panel builders

Competitive Advantages

- Economy
- Dependability
- Clarity of signal—it's bright!
- Easy color changes
- 5-year warranty