



### Main

Product or component type	Dry Sealed Transformer
Primary Voltage	240 x 480 V
Full Capacity Taps	0
Secondary Voltage	120/240 V

### Complementary

Enclosure Code	9A
Phase	1 phase
Primary to Secondary Voltage	240 x 480 V 120/240 V
Power Rating	2 kVA
Temperature rise	115 °C
Maximum Height	9.56 in (242.82 mm)
Maximum Width	8.68 in (220.47 mm)
Maximum Depth	6.56 in (166.62 mm)
Enclosure mounting	Wall mounted
Enclosure material	Painted sheet steel

### Environment

Enclosure Type	NEMA 3R
Insulation temperature	356 °F (180 °C)
Product certifications	CSA UL Listed CULus

### Ordering and shipping details

Category	16277 - RESIN LVGP XFMR
Discount Schedule	PE2
GTIN	00785901019886
Nbr. of units in pkg.	1
Package weight(Lbs)	49.2 lb(US) (22.32 kg)
Returnability	Yes
Country of origin	MX

### Packing Units

Package 1 Height	9.90 in (25.146 cm)
Package 1 width	11.10 in (28.194 cm)
Package 1 Length	12.50 in (31.750 cm)


## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Phenyl glycidyl ether which is known to the State of California to cause Carcinogen & Reproductive harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
PVC free	Yes

## Contractual warranty

Warranty	18 months
----------	-----------

Approximate Dimensions

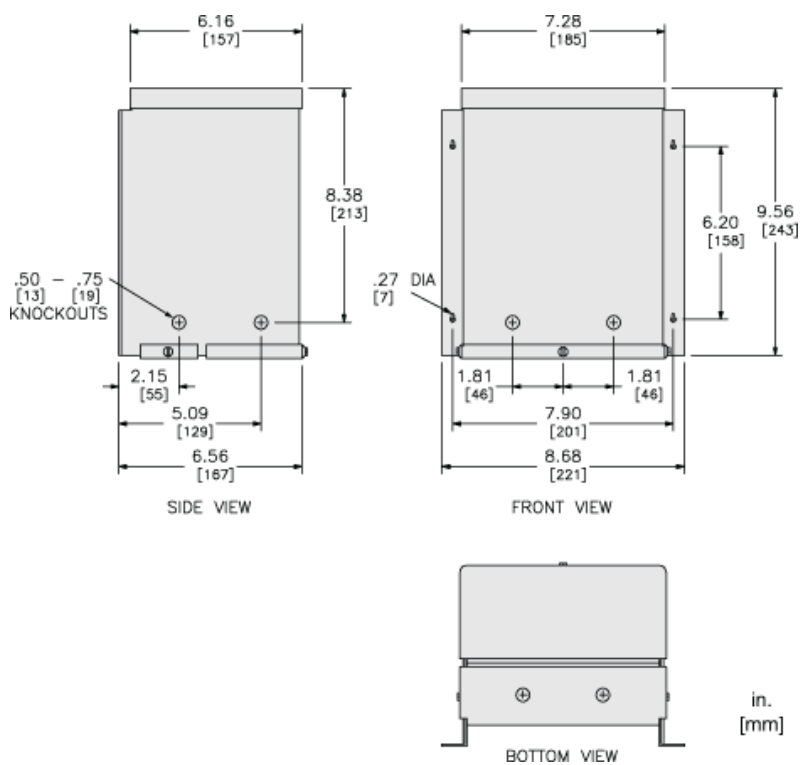

---

Wiring Diagrams

---