

T5661

Tamper-Resistant Single Receptacle, 15 Amp 250 Volt, Brown

Single Receptacle Outlet, Heavy-Duty Industrial Specification Grade, Tamper-Resistant, Smooth Face, 15 Amp, 250 Volt, Back and Side Wire, NEMA 6-15R, 2-Pole, 3-Wire, Self-Grounding - Brown


Leviton's 250 Volt Tamper-Resistant Receptacles are the industry's first and only solution to the revisions of the NEC Article 406.12!

- Brass self-grounding clip is permanently staked on for secure and reliable performance
- Tamper-resistant shutters
- Accommodates back and side wiring
- Face made of impact-resistant engineering polymer




UPC Code : 078477649824

Country Of Origin : Mexico



Available Colors :

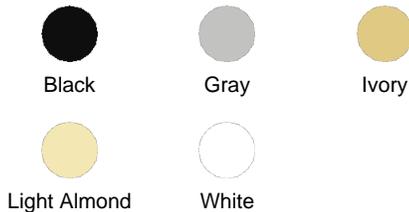

Technical Information

Electrical Specifications

Amperage : 15 A
Dielectric Voltage : 2000 VAC
Grounding : Self-Grounding
HP Rating : 1-1/2 HP
Pole : 2
Temperature Rise : Max 30 C
Voltage : 250 VAC
Wire : 3

Environmental Specifications

Flammability : Rated V-2 per UL 94
Operating Temperature : Maximum Continuous 75°C, minimum -40°C (w/o impact)

Material Specifications

Body Material : Nylon
Face Material : PBT
Ground Contacts : Phosphor Bronze
Grounding Screw : #8 Brass
Line Contacts : Brass Triple Wipe 0.040"
Mounting Screws : #6 Plated Steel

Mounting Strap : Galvanized Steel

Tamper Resistant Shutter Mechanism : Thermoplastic

Terminal Clamps : Galvanized Steel

Terminal Screws : #10 Brass

Mechanical Specifications

Product ID : Ratings are Marked on Device

Strap Construction :

Terminal Accom. : #14-#10 AWG Solid or Stranded

Termination : Back & Side Wire

Product Features

Color : Brown

Device Type : Single Receptacle Outlet

Feature : Tamper-Resistant , Smooth Face , RoHS Compliant

Grade : Heavy-Duty Industrial Specification Grade

NEMA : 6-15R

Standards & Certifications

NEMA Rating : WD-1 and WD-6

Standards and Certifications : UL 498; CSA C22.2, No. 42; Fed Spec WC-596; NOM

Warranty

Warranty : 10-Year Limited

SPECIFICATION SUBMITTAL

JOB NAME:	CATALOG NUMBERS:	
<input type="text"/>	<input type="text"/>	<input type="text"/>
JOB NUMBER:	<input type="text"/>	<input type="text"/>

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):
+1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·
FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-
1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:
www.leviton.com/international/contacts/

