

C-LITE
LED LIGHTING**CREE**  **LIGHTING**

**C-Lite® Products,
Cree® Lighting Pro Series Lamps and Downlights**
Pocket Guide and Notebook



C-LITE® — YOUR TRUSTED VALUE BRAND

EFFICIENCY YOU NEED. QUALITY YOU TRUST.

C-Lite® LED Lighting by Cree Lighting is a reliable and affordable portfolio created to make jobs easier. Plain and simple. We understand the hurdles and headaches that come with any job so we found a solution that gets them done faster and more efficiently. This line of products is easy to install. All products meet Cree Lighting's rigorous testing standards and are engineered to deliver great energy savings and powerful performance. C-Lite® LED Lighting by Cree Lighting is backed by a great warranty and Cree Lighting's world-class live customer support.

Cree® Lighting Professional Series LED Lamps & LED Downlights

LIGHT YOUR SPACE LIKE A PRO.



The NEW Cree® Lighting PRO Series LED lamps and LED downlights feature a remarkable combination of performance and quality, designed exclusively for spec-grade projects. They feature beautiful, high-CRI light that provides exceptional color quality, making colors appear vibrant, rich and natural. These lamps and downlights are backed by a no-hassle warranty — making Cree Lighting the easy choice for your LED lamp and downlight needs.

CREE ⇄ **LIGHTING**

TABLE OF CONTENTS

LED OUTDOOR

C-Lite® Area Lights	4
C-Lite® Area Light Mounting Options	7
C-Lite® Canopy Lights	8
C-Lite® Compact Floodlights	12
C-Lite® High Performance Floodlights	15
C-Lite® Floodlight Accessories	16
C-Lite® Wall Mounts	17
C-Lite® Wall Packs (Non-Cutoff)	19
C-Lite® Wall Packs (Full-Cutoff)	22
C-Lite® Wall Pack Accessories	24
C-Lite® Vapor Tights	25
C-Lite® Vapor Tight Accessories	27

TABLE OF CONTENTS

LED INDOOR

Cree® Lighting Downlights.....	28
Cree® Lighting Downlights Accessories.....	32
C-Lite® Downlights.....	34
C-Lite® Basket Troffers.....	36
C-Lite® Flat Panel Troffers	39
C-Lite® Strips	43
C-Lite® Strip Accessories	45
C-Lite® Wraps.....	46
C-Lite® T8 Type B Double Ended Bypass Retrofit	48
C-Lite® Round High Bays	50
C-Lite® High Bay Accessories	52
C-Lite® Linear High Bays	53
C-Lite® High Bay Accessories	54
C-Lite® General Accessories.....	57

LED LAMPS

C-Lite® Lamps.....	60
Cree® Lighting Professional Series Lamps.....	62

LED AREA LIGHTS

Stylish Modern Design, Type III Optimized Distribution



LED Area Light (SL3)

- CRI: 80+
- Location Type: Wet
- Voltage: 120-277V
- High LPW: up to 142
- Watts: 73 to 220
- Dimmable: 0-10V
- Quality Driver

SKU	Replaces	CCT	Lumens	Watts	Finish	Dimensions
C-AR-A-SL3-9L-30K-UL-3PC-DB	250W MH	3000K	9200	73	Dark Bronze	17-3/5" L x 13" W x 6-1/10" H
C-AR-A-SL3-9L-40K-UL-3PC-DB	250W MH	4000K	9400	73	Dark Bronze	17-3/5" L x 13" W x 6-1/10" H
C-AR-A-SL3-10L-50K-UL-3PC-DB	250W MH	5000K	9900	73	Dark Bronze	17-3/5" L x 13" W x 6-1/10" H
C-AR-A-SL3-16L-30K-UL-3PC-DB	320W PSMH/ 400W MH	3000K	16100	150	Dark Bronze	17-3/5" L x 13" W x 6-1/10" H
C-AR-A-SL3-18L-40K-UL-3PC-DB	320W PSMH/ 400W MH	4000K	17800	150	Dark Bronze	17-3/5" L x 13" W x 6-1/10" H
C-AR-A-SL3-18L-50K-UL-3PC-DB	320W PSMH/ 400W MH	5000K	17800	150	Dark Bronze	17-3/5" L x 13" W x 6-1/10" H
C-AR-A-SL3-27L-30K-UL-3PC-DB	400W PSMH/ HPS	3000K	27400	220	Dark Bronze	21-1/10" L x 13" W x 6-1/10" H
C-AR-A-SL3-30L-40K-UL-3PC-DB	400W PSMH/ HPS	4000K	30300	220	Dark Bronze	21-1/10" L x 13" W x 6-1/10" H
C-AR-A-SL3-30L-50K-UL-3PC-DB	400W PSMH/ HPS	5000K	30300	220	Dark Bronze	21-1/10" L x 13" W x 6-1/10" H

LED AREA LIGHTS

Stylish Modern Design, Type IV Optimized Distribution



LED Area Light (SL4)

- CRI: 80+
- Location Type: Wet
- Voltage: 120-277V
- High LPW: up to 142
- Watts: 73 to 220
- Dimmable: 0-10V
- Quality Driver

SKU	Replaces	CCT	Lumens	Watts	Finish	Dimensions
C-AR-A-SL4-9L-30K-UL-3PC-DB	250W MH	3000K	9300	73	Dark Bronze	17-3/5" L x 1" W x 6-1/10" H
C-AR-A-SL4-9L-40K-UL-3PC-DB	250W MH	4000K	9400	73	Dark Bronze	17-3/5" L x 13" W x 6-1/10" H
C-AR-A-SL4-10L-50K-UL-3PC-DB	250W MH	5000K	9900	73	Dark Bronze	17-3/5" L x 13" W x 6-1/10" H
C-AR-A-SL4-16L-30K-UL-3PC-DB	320W PSMH/ 400W MH	3000K	16300	150	Dark Bronze	17-3/5" L x 13" W x 6-1/10" H
C-AR-A-SL4-18L-40K-UL-3PC-DB	320W PSMH/ 400W MH	4000K	17900	150	Dark Bronze	17-3/5" L x 13" W x 6-1/10" H
C-AR-A-SL4-18L-50K-UL-3PC-DB	320W PSMH/ 400W MH	5000K	17900	150	Dark Bronze	17-3/5" L x 13" W x 6-1/10" H
C-AR-A-SL4-28L-30K-UL-3PC-DB	400W PSMH/ HPS	3000K	27800	220	Dark Bronze	21-1/10" L x 13" W x 6-1/10" H
C-AR-A-SL4-30L-40K-UL-3PC-DB	400W PSMH/ HPS	4000K	30400	220	Dark Bronze	21-1/10" L x 13" W x 6-1/10" H
C-AR-A-SL4-30L-50K-UL-3PC-DB	400W PSMH/ HPS	5000K	30400	220	Dark Bronze	21-1/10" L x 13" W x 6-1/10" H

LED AREA LIGHTS

Stylish Modern Design, Type V Optimized Distribution



LED Area Light (SL5)

- CRI: 80+
- Location Type: Wet
- Voltage: 120-277V
- High LPW: up to 142
- Watts: 73 to 220
- Dimmable: 0-10V
- Quality Driver

SKU	Replaces	CCT	Lumens	Watts	Finish	Dimensions
C-AR-A-SL5-9L-30K-UL-3PC-DB	250W MH	3000K	9300	73	Dark Bronze	17-3/5" L x 13" W x 6-1/10" H
C-AR-A-SL5-10L-40K-UL-3PC-DB	250W MH	4000K	9800	73	Dark Bronze	17-3/5" L x 13" W x 6-1/10" H
C-AR-A-SL5-10L-50K-UL-3PC-DB	250W MH	5000K	10100	73	Dark Bronze	17-3/5" L x 13" W x 6-1/10" H
C-AR-A-SL5-16L-30K-UL-3PC-DB	320W PSMH/ 400W MH	3000K	16400	150	Dark Bronze	17-3/5" L x 13" W x 6-1/10" H
C-AR-A-SL5-18L-40K-UL-3PC-DB	320W PSMH/ 400W MH	4000K	18500	150	Dark Bronze	17-3/5" L x 13" W x 6-1/10" H
C-AR-A-SL5-18L-50K-UL-3PC-DB	320W PSMH/ 400W MH	5000K	18500	150	Dark Bronze	17-3/5" L x 13" W x 6-1/10" H
C-AR-A-SL5-28L-30K-UL-3PC-DB	400W PSMH/ HPS	3000K	28300	220	Dark Bronze	21-1/10" L x 13" W x 6-1/10" H
C-AR-A-SL5-31L-40K-UL-3PC-DB	400W PSMH/ HPS	4000K	31100	220	Dark Bronze	21-1/10" L x 13" W x 6-1/10" H
C-AR-A-SL5-31L-50K-UL-3PC-DB	400W PSMH/ HPS	5000K	31100	220	Dark Bronze	21-1/10" L x 13" W x 6-1/10" H

LED AREA LIGHT MOUNTING OPTIONS

Mounting Options for C-Lite® Area Lights



LED Mount Slipfitter 2"



LED 8" Mounting Arm

LED Trunion Mount
U-Bracket

- Mounting options sold separately to offer a variety of configurations for inventory flexibility

Item	SKU	Finish	Size/Fits
LED Mount Slipfitter 2"	C-ACC-A-MTSL-2IN	Dark Bronze	2", Fits C-AR-A-SL Series
LED 8" Mounting Arm	C-ACC-MTPL-AR-SL345-8IN-DB	Dark Bronze	For pole mounting. Fits C-AR-A-SL Series
LED Trunion Mount U-Bracket	C-ACC-A-AUB-AR-SL345-3X5X6-DB	Dark Bronze	For pole mounting. Fits C-AR-A-SL Series

LED CANOPY LIGHTS

Traditional Style; Easy Installation



Square Canopy

- CRI: >70
- Location Type: Wet
- Voltage: 120-277V
- High LPW: Up to 136
- Watts: 27
- Non-Dimmable
- Quality Driver

SKU	Replaces	CCT	Lumens	Finish	Dimensions
C-CP-B-SQ-3L-40K-DB	100W PSMH	4000K	3600	Dark Bronze	8-3/4" L x 8-3/4" W x 3-3/4" H Outer Edge: 10" L x 10" W
C-CP-B-SQ-3L-40K-WH	100W PSMH	4000K	3600	White	
C-CP-B-SQ-3L-50K-DB	100W PSMH	5000K	3600	Dark Bronze	
C-CP-B-SQ-3L-50K-WH	100W PSMH	5000K	3600	White	

LED CANOPY LIGHTS

Traditional Style; Easy Installation



Square Canopy

- CRI: >70
- Location Type: Wet
- Voltage: 120-277V
- High LPW: Up to 136
- Watts: 36
- Non-Dimmable
- Quality Driver

SKU	Replaces	CCT	Lumens	Finish	Dimensions
C-CP-B-SQ-4L-40K-DB	100-150W PSMH/175MH	4000K	4900	Dark Bronze	8-3/4" L x 8-3/4" W x 3-3/4" H Outer Edge: 10" L x 10" W
C-CP-B-SQ-4L-40K-WH	100-150W PSMH/175MH	4000K	4900	White	
C-CP-A-SQ-4L-50K-DB	100-150W PSMH/175MH	5000K	4900	Dark Bronze	
C-CP-B-SQ-4L-50K-WH	100-150W PSMH/175MH	5000K	4900	White	

LED CANOPY LIGHTS

Traditional Style; Easy Installation



Square Canopy

- CRI: >70
- Location Type: Wet
- Voltage: 120-277V
- High LPW: Up to 136
- Watts: 53
- Non-Dimmable
- Quality Driver

SKU	Replaces	CCT	Lumens	Finish	Dimensions
C-CP-B-SQ-7L-40K-DB	150W PSMH/ 175W MH	4000K	7900	Dark Bronze	8-3/4" L x 8-3/4" W x 3-3/4" H Outer Edge: 10" L x 10" W
C-CP-B-SQ-7L-40K-WH	150W PSMH/ 175W MH	4000K	7900	White	
C-CP-B-SQ-7L-50K-DB	150W PSMH/ 175W MH	5000K	7900	Dark Bronze	
C-CP-B-SQ-7L-50K-WH	150W PSMH/ 175W MH	5000K	7900	White	

LED CANOPY LIGHTS

Traditional Style; Easy Installation



Square Canopy

- CRI: >70
- Location Type: Wet
- Voltage: 120-277V
- High LPW: Up to 136
- Watts: 95
- Non-Dimmable
- Quality Driver

SKU	Replaces	CCT	Lumens	Finish	Dimensions
C-CP-A-SQ-120L-40K-DB	250W PSMH	4000K	12000	Dark Bronze	13-2/3" L x 13-2/3" W x 6-3/5" H Outer Edge: 14" L x 14" W
C-CP-A-SQ-120L-40K-WH	250W PSMH	4000K	12000	White	
C-CP-A-SQ-120L-50K-DB	250W PSMH	5000K	12000	Dark Bronze	
C-CP-A-SQ-120L-50K-WH	250W PSMH	5000K	12000	White	

COMPACT LED FLOODLIGHTS

**Precision Optics for Uniform, Very Wide Distribution;
5-Year Limited Warranty***



1/2" Fitter Mount
(FT-DB)



Yoke Mount
(YK-DB)

- CRI: >70
- Location Type: Wet
- Voltage: 120-277V

- Non-Dimmable
- Distribution: Very Wide
- Watts: 12 to 48

SKU	Replaces	CCT	Lumens	Finish	Dimensions
C-FL-A-LCF-1L-30K-FT-DB	50W MH	3000K	1500	Dark Bronze	5-1/8" L x 1-9/16" W x 4-11/16" H
C-FL-A-LCF-1L-30K-YK-DB	50W MH	3000K	1500	Dark Bronze	5-1/8" L x 1-9/16" W x 3-7/8" H
C-FL-A-LCF-1L-40K-FT-DB	50W MH	4000K	1500	Dark Bronze	5-1/8" L x 1-9/16" W x 4-11/16" H
C-FL-A-LCF-1L-40K-YK-DB	50W MH	4000K	1500	Dark Bronze	5-1/8" L x 1-9/16" W x 3-7/8" H

COMPACT LED FLOODLIGHTS

**Precision Optics for Uniform, Very Wide Distribution;
5-Year Limited Warranty***



1/2" Fitter Mount
(FT-DB)



Yoke Mount
(YK-DB)

- CRI: >70
- Location Type: Wet
- Voltage: 120-277V

- Non-Dimmable
- Distribution: Very Wide
- Watts: 12 to 48

SKU	Replaces	CCT	Lumens	Finish	Dimensions
C-FL-A-LCF-3L-30K-FT-DB	100W PSMH	3000K	3300	Dark Bronze	9" L x 2" W x 8-13/16" H
C-FL-A-LCF-3L-30K-YK-DB	100W PSMH	3000K	3300	Dark Bronze	9-3/16" L x 2" W x 7-3/16" H
C-FL-A-LCF-3L-40K-FT-DB	100W PSMH	4000K	3300	Dark Bronze	9" L x 2" W x 8-13/16" H
C-FL-A-LCF-3L-40K-YK-DB	100W PSMH	4000K	3300	Dark Bronze	9-3/16" L x 2" W x 7-3/16" H

COMPACT LED FLOODLIGHTS

**Precision Optics for Uniform, Very Wide Distribution;
5-Year Limited Warranty***



1/2" Fitter Mount
(FT-DB)



Yoke Mount
(YK-DB)

- CRI: >70
- Location Type: Wet
- Voltage: 120-277V

- Non-Dimmable
- Distribution: Very Wide
- Watts: 12 to 48

SKU	Replaces	CCT	Lumens	Finish	Dimensions
C-FL-A-LCF-6L-30K-FT-DB	150W PSMH	3000K	5700	Dark Bronze	9" L x 2" W x 8-13/16" H
C-FL-A-LCF-6L-30K-YK-DB	150W PSMH	3000K	5700	Dark Bronze	9-5/16" L x 2" W x 7-3/16" H
C-FL-A-LCF-6L-40K-FT-DB	150W PSMH	4000K	5700	Dark Bronze	9" L x 2" W x 8-13/16" H
C-FL-A-LCF-6L-40K-YK-DB	150W PSMH	4000K	5700	Dark Bronze	9-5/16" L x 2" W x 7-3/16" H

HIGH PERFORMANCE LED FLOODLIGHTS

High Quality; Easy Installation; 5-Year Limited Warranty*



Premium LED
Floodlight

- CRI: >70
- Location Type: Wet
- Voltage 120-277V
- Non-Dimmable



High-Output
LED Floodlight

- Finish Color: Dark Bronze
- High LPW: up to 118
- Watts: 118 to 234

SKU	Replaces	CCT	Lumens	Dimensions
C-FL-A-RTS2-13L-40K-DB	250W PSMH	4000K	13600	14-5/8" H x 12-3/4" W x 7-3/8" D
C-FL-A-RTS4-23L-40K-DB	400W PSMH	4000K	22900	16-1/16" H x 17-3/4" W x 7-5/16" D

LED FLOODLIGHT ACCESSORIES



LED Photocell 120V-277V

ITEM	SKU	SIZE/FITS
LED Photocell 120V	C-ACC-A-PCCELL-LV	120V, Fits C-FL-A-RTS2, C-FL-A-RTS4 Series
LED Photocell 208-277V	C-ACC-A-PCCELL-HV	208-277V, Fits C-FL-A-RTS2, C-FL-A-RTS4 Series

LED WALL MOUNTS

Easy Installation; Versatile; Efficient



LED Wall Mounts

- CRI: >70
- Location Type: Wet
- Non-Dimmable
- Voltage: 120V
- High LPW: up to 97
- Watts: 14 to 36

SKU	Replaces	CCT	Lumens	Finish	Dimensions
C-WM-A-WLCY-6L-40K-WH	60W Incandescent	4000K	600	White	6-1/2" D x 4-3/4" W x 9-1/3" H (Cylinder)
C-WM-A-WLCY-6L-40K-DB	60W Incandescent	4000K	600	Dark Bronze	6-1/2" D x 4-3/4" W x 9-1/3" H (Cylinder)
C-WM-A-WLSP-8L-40K-WH	60W Incandescent	4000K	800	White	5-4/5" D x 4-2/5" W x 9-4/5" H (Globe)
C-WM-A-WLSP-8L-40K-DB	60W Incandescent	4000K	800	Dark Bronze	5-4/5" D x 4-2/5" W x 9-4/5" H (Globe)

LED WALL MOUNTS

Easy Installation; Versatile; Efficient



LED High-Output Wall Mount

- CRI: >70
- Location Type: Wet
- Non-Dimmable
- Voltage: 120V
- High LPW: up to 130
- Watts: 24

SKU	Replaces	CCT	Lumens	Finish	Dimensions
C-WM-B-WLHO-31L-40K-WH-P	100W PSMH	4000K	3120	White	5-1/2"W x 8-3/4"H x 3-5/8"D
C-WM-B-WLHO-31L-50K-WH-P	100W PSMH	5000K	3120	White	
C-WM-B-WLHO-31L-40K-MB-P	100W PSMH	4000K	3120	Medium Bronze	
C-WM-B-WLHO-31L-50K-MB-P	100W PSMH	5000K	3120	Medium Bronze	

LED WALL PACKS (NON-CUTOFF)

Efficient; Easy Installation; 5-Year Limited Warranty*



LED Wall Pack Traditional

- CRI: >70
- Location Type: Wet
- Voltage: 120-277V
- Non-Dimmable
- Finish Color: Dark Bronze
- Light LPW: up to 130
- Watts: 30 to 168

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-WP-B-TR-4L-30K-UL-BZ	100W PSMH	3000K	4000	30W	14" w x 9-1/4" H x 9" D
C-WP-B-TR-4L-40K-UL-BZ	100W PSMH	4000K	4000	30W	
C-WP-B-TR-4L-50K-UL-BZ	100W PSMH	5000K	4000	30W	
C-WP-B-TR-6L-30K-UL-BZ	150W PSMH	3000K	6100	47W	
C-WP-B-TR-6L-40K-UL-BZ	150W PSMH	4000K	6200	47W	
C-WP-B-TR-6L-50K-UL-BZ	150W PSMH	5000K	6500	47W	

LED WALL PACKS (NON-CUTOFF)

Efficient; Easy Installation; 5-Year Limited Warranty*



LED Wall Pack Traditional

- CRI: >70
- Location Type: Wet
- Voltage: 120-277V
- Non-Dimmable
- Finish Color: Dark Bronze
- Light LPW: up to 130
- Watts: 30 to 168

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-WP-B-TR-9L-30K-UL-BZ	250W MH	3000K	9000	68W	14" W x 9-1/4" H x 9" D
C-WP-B-TR-9L-40K-UL-BZ	250W MH	4000K	9100	68W	
C-WP-B-TR-9L-50K-UL-BZ	250W MH	5000K	9200	68W	
C-WP-B-TR-14L-40K-UL-BZ	320W PSMH	4000K	14000	106W	
C-WP-B-TR-14L-50K-UL-BZ	320W PSMH	5000K	14300	106W	

LED WALL PACKS (NON-CUTOFF)

Efficient; Easy Installation; 5-Year Limited Warranty*



LED Wall Pack Traditional

- CRI: >70
- Location Type: Wet
- Voltage: 120-277V
- Non-Dimmable
- Finish Color: Dark Bronze
- High LPW: up to 130
- Watts: 30 to 168

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-WP-B-TR-18L-40K-UL-BZ	400W MH	4000K	18200	137W	18" W x 9-1/4" H x 10" D
C-WP-B-TR-18L-50K-UL-BZ	400W MH	5000K	18700	137W	
C-WP-B-TR-23L-40K-UL-BZ	400W PSMH	4000K	22700	168W	
C-WP-B-TR-23L-50K-UL-BZ	400W PSMH	5000K	23400	168W	

LED WALL PACKS (FULL-CUTOFF)

Efficient; Easy Installation; 5-Year Limited Warranty*



Small

LED Wall Packs Architectural – ARFC Series

- CRI: >70
- Location Type: Wet
- Voltage: 120-277V
- Non-Dimmable
- Finish Color: Dark Bronze
- High LPW: up to 144
- Watts: 11 to 28

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-WP-A-ARFC-SM-1L-30K-DB	50W MH	3000K	1350	11	8-5/8" W x 7-1/2" H x 5-1/8" D
C-WP-A-ARFC-SM-1L-40K-DB	50W MH	4000K	1500	11	
C-WP-A-ARFC-SM-1L-50K-DB	50W MH	5000K	1500	11	
C-WP-A-ARFC-SM-3L-30K-DB	100W PSMH	3000K	2900	28	
C-WP-A-ARFC-SM-3L-40K-DB	100W PSMH	4000K	3100	28	
C-WP-A-ARFC-SM-3L-50K-DB	100W PSMH	5000K	3100	28	

LED WALL PACKS (FULL-CUTOFF)

Efficient; Easy Installation; 5-Year Limited Warranty*



Large

LED Wall Packs Architectural – ARFC Series

- CRI: >70
- Location Type: Wet
- Voltage: 120-277V
- Non-Dimmable
- Finish Color: Dark Bronze
- High LPW: up to 144
- Watts: 35 to 73

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-WP-A-ARFC-LG-4L-30K-DB	150W PSMH	3000K	4400	35	14-3/8" W x 9-3/8" H x 5-3/4" D
C-WP-A-ARFC-LG-4L-40K-DB	150W PSMH	4000K	4900	35	
C-WP-A-ARFC-LG-4L-50K-DB	150W PSMH	5000K	4900	35	
C-WP-A-ARFC-LG-8L-30K-DB	250W MH	3000K	8200	73	
C-WP-A-ARFC-LG-8L-40K-DB	250W MH	4000K	8900	73	
C-WP-A-ARFC-LG-8L-50K-DB	250W MH	5000K	8900	73	

LED WALL PACK ACCESSORIES



Field-installed photocell accessory

Item	SKU	Voltage
LED Photocell, 120V	C-ACC-A-PCCELL-LV	120V
LED Photocell, 208-277V	C-ACC-A-PCCELL-HV	208-277V

LED VAPOR TIGHTS

Efficient; Traditional; Easy Installation; 5-Year Limited Warranty*



LED Linear Vapor Strip

- CRI: >80
- Location Type: Wet
- Non-Dimmable
- Voltage: 120-277V
- High LPW: 130
- Watts: 40

SKU	Replaces	CCT	Lumens	Finish	Dimensions
C-VT-A-LIN4-52L-40K-GR	2-3-Lamp F32T8 or 2-Lamp F54T5H0	4000K	5200	Gray	50" L x 4-1/2" W x 3-1/2" H
C-VT-A-LIN4-52L-50K-GR	2-3-Lamp F32T8 or 2-Lamp F54T5H0	5000K	5200	Gray	50" L x 4-1/2" W x 3-1/2" H

LED VAPOR TIGHTS

Efficient; Traditional; Easy Installation; 5-Year Limited Warranty*



LED Vapor Ceiling Mount

- CRI: >80
- Location Type: Wet
- Non-Dimmable



LED Vapor Wall Mounts

- Voltage: 120-277V
- High LPW: up to 98
- Watts: 12 to 22

SKU	Replaces	CCT	Lumens	Finish	Dimensions
C-VT-B-SMCL-10L-40K-GR	100W Incandescent	4000K	1000	Gray	5-9/10" L x 4-3/5" Dia x 10" H
C-VT-B-SMCL-10L-50K-GR	100W Incandescent	5000K	1000	Gray	5-9/10" L x 4-3/5" Dia x 10" H
C-VT-B-SMCL-19L-40K-GR	200W Incandescent	4000K	1900	Gray	5-9/10" L x 4-3/5" Dia x 10" H
C-VT-B-SMCL-19L-50K-GR	200W Incandescent	5000K	1900	Gray	5-9/10" L x 4-3/5" Dia x 10" H
C-VT-B-SMWL-10L-40K-GR	100W Incandescent	4000K	1000	Gray	7-1/10" L x 5" W x 11-3/10" H
C-VT-B-SMWL-10L-50K-GR	100W Incandescent	5000K	1000	Gray	7-1/10" L x 5" W x 11-3/10" H
C-VT-B-SMWL-19L-40K-GR	200W Incandescent	4000K	1900	Gray	7-1/10" L x 5" W x 11-3/10" H
C-VT-B-SMWL-19L-50K-GR	200W Incandescent	5000K	1900	Gray	7-1/10" L x 5" W x 11-3/10" H

LED VAPOR TIGHT ACCESSORIES

Accessories for C-Lite® LED Vapor Tights



LED Vapor Tight Shroud

Item	SKU	Finish	Size/Fits
LED Vapor Tight, Small Shroud	C-ACC-A-VTSHR- SM-GR	Gray	Small, for: C-VT-A-SMCL/ SMPD Series

LED DOWNLIGHTS

High Efficacy and High Quality; 5-Year Limited Warranty*



4" Downlight (E26)



4" Downlight (GU24)

- CRI: 90+
- Location Type: Damp and Wet
- Voltage: 120V
- Dimmable to 5%

- White, Metal Finish
- Mounting: Recessed

SKU	Replaces	CCT	Lumens	Watts	Dimensions
CR4T-790L-27K-12-E26GU24	75W Incandescent	2700K	790	10.5	2-3/5" H x 5" Dia (Trim Width)
CR4T-790L-30K-12-E26GU24	75W Incandescent	3000K	790	10.5	2-3/5" H x 5" Dia (Trim Width)
CR4T-790L-35K-12-E26GU24	75W Incandescent	3500K	790	10.5	2-3/5" H x 5" Dia (Trim Width)
CR4T-790L-40K-12-E26GU24	75W Incandescent	4000K	790	10.5	2-3/5" H x 5" Dia (Trim Width)

LED DOWNLIGHTS

High Efficacy and High Quality; 5-Year Limited Warranty*



6" Downlight (E26)



6" Downlight (GU24)

- CRI: 90+
- Location Type: Damp and Wet
- Voltage: 120V
- Dimmable to 5%
- White, Metal Finish
- Mounting: Recessed

SKU	Replaces	CCT	Lumens	Watts	Dimensions
CR6T-825L-27K-12-E26GU24	75W Incandescent	2700K	825	11	3-1/2" H x 7-2/5" Dia (Trim Width)
CR6T-825L-30K-12-E26GU24	75W Incandescent	3000K	825	11	3-1/2" H x 7-2/5" Dia (Trim Width)
CR6T-825L-35K-12-E26GU24	75W Incandescent	3500K	825	11	3-1/2" H x 7-2/5" Dia (Trim Width)
CR6T-825L-40K-12-E26GU24	75W Incandescent	4000K	825	11	3-1/2" H x 7-2/5" Dia (Trim Width)

LED DOWNLIGHTS

High Efficacy and High Quality; 5-Year Limited Warranty*



6" Downlight (E26)



6" Downlight (GU24)

- CRI: 90+
- Location Type: Damp and Wet
- Voltage: 120V
- Dimmable to 5%
- White, Metal Finish
- Mounting: Recessed

SKU	Replaces	CCT	Lumens	Watts	Dimensions
CR6T-1100L-27K-12-E26GU24	100W Incandescent	2700K	1100	14.5	3-1/2" H x 7-2/5" Dia (Trim Width)
CR6T-1100L-30K-12-E26GU24	100W Incandescent	3000K	1100	14.5	3-1/2" H x 7-2/5" Dia (Trim Width)
CR6T-1100L-35K-12-E26GU24	100W Incandescent	3500K	1100	14.5	3-1/2" H x 7-2/5" Dia (Trim Width)
CR6T-1100L-40K-12-E26GU24	100W Incandescent	4000K	1100	14.5	3-1/2" H x 7-2/5" Dia (Trim Width)

LED DOWNLIGHTS

High Efficacy and High Quality; 5-Year Limited Warranty*



6" Downlight (E26)



6" Downlight (GU24)

- CRI: 90+
- Location Type: Damp and Wet
- Voltage: 120V
- Dimmable to 5%
- White, Metal Finish
- Mounting: Recessed

SKU	Replaces	CCT	Lumens	Watts	Dimensions
CR6T-1600L-27K-12-E26GU24	150W Incandescent	2700K	1600	21	3-1/2" H x 7-2/5" Dia (Trim Width)
CR6T-1600L-30K-12-E26GU24	150W Incandescent	3000K	1600	21	3-1/2" H x 7-2/5" Dia (Trim Width)
CR6T-1600L-35K-12-E26GU24	150W Incandescent	3500K	1600	21	3-1/2" H x 7-2/5" Dia (Trim Width)
CR6T-1600L-40K-12-E26GU24	150W Incandescent	4000K	1600	21	3-1/2" H x 7-2/5" Dia (Trim Width)

LED DOWNLIGHT ACCESSORIES

Accessories for Cree® CRT Downlights



Black

Satin Nickel

Bronze




CRT Downlight Trims

Accessories	SKU	Fits
4" Downlight Plastic Trim Black	CR4T-TRMBKAN-1	CR4T Series Downlights
4" Downlight Plastic Trim Black , with Extended Black Flange	CR6T-TRMBKBB-1	CR4T Series Downlights
4" Downlight Plastic Trim Satin Nickel	CR4T-TRMSTAN-1	CR4T Series Downlights
4" Downlight Plastic Trim Bronze	CR4T-TRMBRAN-1	CR4T Series Downlights

LED DOWNLIGHT ACCESSORIES

Accessories for Cree® CRT Downlights

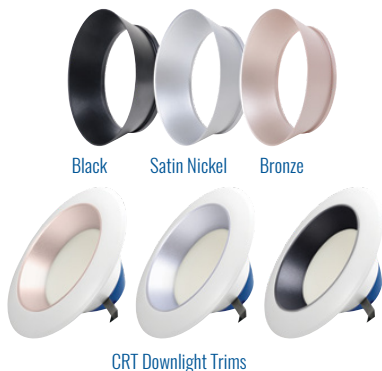

Accessories	SKU	Fits
6" Downlight Plastic Trim Black	CR6T-TRMBKAN-1	CR6T Series Downlights
6" Downlight Plastic Trim Satin Nickel	CR6T-TRMSTAN-1	CR6T Series Downlights
6" Downlight Plastic Trim Bronze	CR6T-TRMBRAN-1	CR6T Series Downlights
6" Downlight Plastic Trim - Black with Extended Black Flange	CR6T-TRMBKBB-1	CR6T Series Downlights

LED DOWNLIGHTS

Best Union of Performance and Value; 5-Year Limited Warranty*



4" Downlight

- CRI: 90
- Location Type: Damp
- Voltage: 120V
- Input Power: 7.6 Watts
- Initial Delivered Lumens: 575
- Dimmable to 10%
- Base: E26

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-DL4-A-575L-27K-B1	55W Incandescent	2700K	575	7.6	2-9/10" H x 5" Dia (Trim Width)
C-DL4-A-575L-30K-B1	55W Incandescent	3000K	575	7.6	2-9/10" H x 5" Dia (Trim Width)
C-DL4-A-575L-40K-B1	55W Incandescent	4000K	575	7.6	2-9/10" H x 5" Dia (Trim Width)

LED DOWNLIGHTS

Best Union of Performance and Value; 5-Year Limited Warranty*



6" Downlight

- CRI: 90
- Location Type: Damp
- Voltage: 120V
- Input Power: 8.6 Watts
- Initial Delivered Lumens: 650
- Dimmable to 10%
- Base: E26

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-DL6-A-650L-27K-B1	65W Incandescent	2700K	650	8.6	2-9/10" H x 7-1/5" Dia (Trim Width)
C-DL6-A-650L-30K-B1	65W Incandescent	3000K	650	8.6	2-9/10" H x 7-1/5" Dia (Trim Width)
C-DL6-A-650L-40K-B1	65W Incandescent	4000K	650	8.6	2-9/10" H x 7-1/5" Dia (Trim Width)

LED BASKET TROFFERS

Light Weight Design; High Efficiency; 5-Year Limited Warranty*



LED Basket Troffer

- CRI: ≥80
- Location Type: Damp
- Voltage: 120-277V
- Dimmable: Yes
- White
- Watts: 26 to 35
- Mounting: Recessed
- Emergency Battery Backup Option Available (EB)

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-TR-A-BT14-33L-35K-WH	2 x F17T8 1 x F32T8	3500K	3300	26	47-3/4" L x 11-3/4" W x 2-3/4" H
C-TR-A-BT14-33L-40K-WH	2 x F17T8 1 x F32T8	4000K	3300	26	47-3/4" L x 11-3/4" W x 2-3/4" H
C-TR-A-BT14-33L-50K-WH	2 x F17T8 1 x F32T8	5000K	3300	26	47-3/4" L x 11-3/4" W x 2-3/4" H
C-TR-A-BT14-45L-35K-WH	3 x F17T8 2 x F32T8	3500K	4500	35	47-3/4" L x 11-3/4" W x 2-3/4" H
C-TR-A-BT14-45L-40K-WH	3 x F17T8 2 x F32T8	4000K	4500	35	47-3/4" L x 11-3/4" W x 2-3/4" H
C-TR-A-BT14-45L-50K-WH	3 x F17T8 2 x F32T8	5000K	4500	35	47-3/4" L x 11-3/4" W x 2-3/4" H

LED BASKET TROFFERS

Light Weight Design; High Efficiency; 5-Year Limited Warranty*



2' LED Basket Troffer

- CRI: ≥ 80
- Location Type: Damp
- Voltage: 120-277V
- Dimmable: Yes
- White
- Watts: 26 to 35
- Mounting: Recessed
- Emergency Battery Backup Option Available (EB)

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-TR-A-BT22-33L-35K-WH	2 x F17T8 1 x F32T8/U6	3500K	3300	26	23-3/4" L x 23-3/4" W x 2-3/4" H
C-TR-A-BT22-33L-40K-WH	2 x F17T8 1 x F32T8/U6	4000K	3300	26	23-3/4" L x 23-3/4" W x 2-3/4" H
C-TR-A-BT22-33L-50K-WH	2 x F17T8 1 x F32T8/U6	5000K	3300	26	23-3/4" L x 23-3/4" W x 2-3/4" H
C-TR-A-BT22-45L-35K-WH	3 x F17T8 2 x F32T8/U6	3500K	4500	35	23-3/4" L x 23-3/4" W x 2-3/4" H
C-TR-A-BT22-45L-40K-WH	3 x F17T8 2 x F32T8/U6	4000K	4500	35	23-3/4" L x 23-3/4" W x 2-3/4" H
C-TR-A-BT22-45L-50K-WH	3 x F17T8 2 x F32T8/U6	5000K	4500	35	23-3/4" L x 23-3/4" W x 2-3/4" H

LED BASKET TROFFERS

Light Weight Design; High Efficiency; 5-Year Limited Warranty*



4' LED Basket Troffer

- CRI: ≥ 80
- Location Type: Damp
- Voltage: 120-277V
- Dimmable: Yes
- White
- Watts: 34 to 56
- Mounting: Recessed
- Emergency Battery Backup Option Available (EB)

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-TR-A-BT24-43L-35K-WH	3 x F32T8	3500K	4300	34	47-3/4" L x 23-3/4" W x 2-3/4" H
C-TR-A-BT24-43L-40K-WH	3 x F32T8	4000K	4300	34	47-3/4" L x 23-3/4" W x 2-3/4" H
C-TR-A-BT24-43L-50K-WH	3 x F32T8	5000K	4300	34	47-3/4" L x 23-3/4" W x 2-3/4" H
C-TR-A-BT24-73L-35K-WH	4 x F32T8	3500K	7300	56	47-3/4" L x 23-3/4" W x 2-3/4" H
C-TR-A-BT24-73L-40K-WH	4 x F32T8	4000K	7300	56	47-3/4" L x 23-3/4" W x 2-3/4" H
C-TR-A-BT24-73L-50K-WH	4 x F32T8	5000K	7300	56	47-3/4" L x 23-3/4" W x 2-3/4" H

LED FLAT PANEL TROFFERS

Low Profile Design; High Efficiency; 5-Year Limited Warranty*



1' X 4' LED Flat Panel



2' X 2' LED Flat Panel

- CRI: 80
- Location Type: Damp
- Voltage: 120-277V
- Dimmable, 0-10V

- White
- Watts: 40
- Mounting: Recessed

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-TR-B-FP14-40L-35K-WH	2 x F32T8	3500K	4000	40	47-3/4" L x 11-3/4" W x 1/2" H (Panel)
C-TR-B-FP14-40L-40K-WH	2 x F32T8	4000K	4000	40	47-3/4" L x 11-3/4" W x 1/2" H (Panel)
C-TR-B-FP14-40L-50K-WH	2 x F32T8	5000K	4000	40	47-3/4" L x 11-3/4" W x 1/2" H (Panel)
C-TR-B-FP22-40L-35K-WH	2 x F32T8/ U6	3500K	4000	40	23-3/4" L x 23-3/4" W x 1/2" H (Panel)
C-TR-B-FP22-40L-40K-WH	2 x F32T8/ U6	4000K	4000	40	23-3/4" L x 23-3/4" W x 1/2" H (Panel)
C-TR-B-FP22-40L-50K-WH	2 x F32T8/ U6	5000K	4000	40	23-3/4" L x 23-3/4" W x 1/2" H (Panel)

LED FLAT PANEL TROFFERS

Low Profile Design; High Efficiency; 5-Year Limited Warranty*



2' X 4' LED Flat Panel

- CRI: 80
- Location Type: Damp
- Voltage: 120-277V
- Dimmable, 0-10V
- White
- Watts: 50
- Mounting: Recessed

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-TR-B-FP24-50L-35K-WH	3 x F32T8	3500K	5000	50	47-3/4" L x 23-3/4" W x 1/2" H (Panel)
C-TR-B-FP24-50L-40K-WH	3 x F32T8	4000K	5000	50	47-3/4" L x 23-3/4" W x 1/2" H (Panel)
C-TR-B-FP24-50L-50K-WH	3 x F32T8	5000K	5000	50	47-3/4" L x 23-3/4" W x 1/2" H (Panel)

PREMIUM LED FLAT PANEL TROFFERS

Low Profile Design; High Efficiency; 5-Year Limited Warranty*



1' X 4' LED Flat Panel

- CRI: 80
- Location Type: Damp
- Voltage: 120-277V
- Dimmable, 0-10V
- White



2' X 2' LED Flat Panel

- Watts: 25
- Mounting: Recessed
- Emergency Battery Backup Option Available (EB)

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-TR-A-FP14-HE-32L-35K-WH	2 x F17T8 1 x F32T8	3500K	3250	25	47-5/8" L x 11-5/8" W x 1-3/4" H
C-TR-A-FP14-HE-32L-40K-WH	2 x F17T8 1 x F32T8	4000K	3250	25	47-5/8" L x 11-5/8" W x 1-3/4" H
C-TR-A-FP14-HE-32L-50K-WH	2 x F17T8 1 x F32T8	5000K	3250	25	47-5/8" L x 11-5/8" W x 1-3/4" H
C-TR-A-FP22-HE-32L-35K-WH	2 x F17T8 1 x F32T8/U6	3500K	3250	25	23-5/8" L x 23-5/8" W x 1-3/4" H
C-TR-A-FP22-HE-32L-40K-WH	2 x F17T8 1 x F32T8/U6	4000K	3250	25	23-5/8" L x 23-5/8" W x 1-3/4" H
C-TR-A-FP22-HE-32L-50K-WH	2 x F17T8 1 x F32T8/U6	5000K	3250	25	23-5/8" L x 23-5/8" W x 1-3/4" H

PREMIUM LED FLAT PANEL TROFFERS

Low Profile Design; High Efficiency; 5-Year Limited Warranty*



2' X 4' LED Flat Panel

- CRI: 80
- Location Type: Damp
- Voltage: 120-277V
- Dimmable, 0-10V
- White
- Watts: 40
- Mounting: Recessed
- Emergency Battery Backup Option Available (EB)

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-TR-A-FP24-HE-50L-35K-WH	3 x F32T8	3500K	5000	40	47-5/8" L x 23-5/8" W x 1-3/4" H
C-TR-A-FP24-HE-50L-40K-WH	3 x F32T8	4000K	5000	40	47-5/8" L x 23-5/8" W x 1-3/4" H
C-TR-A-FP24-HE-50L-50K-WH	3 x F32T8	5000K	5000	40	47-5/8" L x 23-5/8" W x 1-3/4" H

LED STRIPS

Easy Installation; High Efficiency; 5-Year Limited Warranty*



2' LED Linear Strip



4' LED Linear Strip

- CRI: ≥ 80
- Location Type: Damp
- Voltage: 120-277V
- 0-10V Dimming

- Finish Color: White
- Watts: 10 to 19
- Mounting Height: 8' to 15'

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-STRIP-A-LIN2-12L-30K-WH	1 x F17T8	3000K	1200	10	24-3/10" L x 2-14/25" W x 2-67/100" H
C-STRIP-A-LIN2-12L-35K-WH	1 x F17T8	3500K	1200	10	24-3/10" L x 2-14/25" W x 2-67/100" H
C-STRIP-A-LIN2-12L-40K-WH	1 x F17T8	4000K	1200	10	24-3/10" L x 2-14/25" W x 2-67/100" H
C-STRIP-A-LIN2-13L-50K-WH	1 x F17T8	5000K	1300	10	24-3/10" L x 2-14/25" W x 2-67/100" H
C-STRIP-A-LIN4-22L-30K-WH	1 x F32T8	3000K	2200	19	47-4/5" L x 2-14/25" W x 2-67/100" H
C-STRIP-A-LIN4-23L-35K-WH	1 x F32T8	3500K	2300	19	47-4/5" L x 2-14/25" W x 2-67/100" H
C-STRIP-A-LIN4-23L-40K-WH	1 x F32T8	4000K	2400	19	47-4/5" L x 2-14/25" W x 2-67/100" H
C-STRIP-A-LIN4-25L-50K-WH	1 x F32T8	5000K	2500	19	47-4/5" L x 2-14/25" W x 2-67/100" H

LED STRIPS

Easy Installation; High Efficiency; 5-Year Limited Warranty*



4' LED Linear Strip

- CRI: ≥ 80
- Location Type: Damp
- Voltage: 120-277V
- 0-10V Dimming
- Finish Color: White
- Watts: 38
- Mounting Height: 8' to 15'

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-STRIP-A-LIN4-43L-30K-WH	2 x F32T8	3000K	4300	38	47-4/5" L x 2-14/25" W x 2-67/100" H
C-STRIP-A-LIN4-44L-35K-WH	2 x F32T8	3500K	4400	38	47-4/5" L x 2-14/25" W x 2-67/100" H
C-STRIP-A-LIN4-46L-40K-WH	2 x F32T8	4000K	4600	38	47-4/5" L x 2-14/25" W x 2-67/100" H
C-STRIP-A-LIN4-49L-50K-WH	2 x F32T8	5000K	4900	38	47-4/5" L x 2-14/25" W x 2-67/100" H

LED STRIP ACCESSORIES

Accessories for C-Lite® Strips



4" Octagonal
Junction Box Cover



PIR Motion Sensor



Suspended Mount Kit
V Hook with 2.5" Chain

Accessories	SKU	Dimensions
4" Octagonal Junction Box Cover	C-ACC-A-JBXCVR	3-39/50" x 3-39/50" x 3/25"
Suspended Mount Kit V Hook with 2.5" Chain	C-ACC-A-SPMTKT	6" x 4" x 79/100"
PIR Motion Sensor	C-PHB-A-HBPIR	

LED WRAPS

Easy Installation; High Efficiency; 5-Year Limited Warranty*



2' LED Linear Wrap

- CRI: ≥80
- Location Type: Damp
- Voltage: 120-277V
- 0-10V Dimming
- Finish Color: White
- Watts: 19
- Mounting Height: 8' to 12'

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-WR-A-WLIN2-24L-30K-WH	2 x F17T8	3000K	2400	19	24-3/8" L x 5-1/8" W x 2-3/4" H
C-WR-A-WLIN2-24L-35K-WH	2 x F17T8	3500K	2400	19	24-3/8" L x 5-1/8" W x 2-3/4" H
C-WR-A-WLIN2-24L-40K-WH	2 x F17T8	4000K	2400	19	24-3/8" L x 5-1/8" W x 2-3/4" H
C-WR-A-WLIN2-24L-50K-WH	2 x F17T8	5000K	2400	19	24-3/8" L x 5-1/8" W x 2-3/4" H

LED WRAPS

Easy Installation; High Efficiency; 5-Year Limited Warranty*



4' LED Linear Wrap

- CRI: ≥80
- Location Type: Damp
- Voltage: 120-277V
- 0-10V Dimming
- Finish Color: White
- Watts: 39
- Mounting Height: 8' to 12'

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-WR-A-WLIN4-48L-30K-WH	2 x F32T8	3000K	4800	39	48" L x 5-1/8" W x 2-3/4" H
C-WR-A-WLIN4-48L-35K-WH	2 x F32T8	3500K	4800	39	48" L x 5-1/8" W x 2-3/4" H
C-WR-A-WLIN4-48L-40K-WH	2 x F32T8	4000K	4800	39	48" L x 5-1/8" W x 2-3/4" H
C-WR-A-WLIN4-48L-50K-WH	2 x F32T8	5000K	4800	39	48" L x 5-1/8" W x 2-3/4" H

LED T8 TYPE B DOUBLE ENDED BYPASS RETROFIT

Easy Installation; High Efficiency; 5-Year Limited Warranty*



2' LED T8 Lamp

- CRI: ≥80
- Location Type: Damp
- Voltage: 120-277V
- Non-Dimmable
- Finish Color: White, Frosted Glass
- Watts: 9
- Mounting: Medium Bipin
G13 Base Surface Mount

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-T824-A-17W-35K-B1	17W Fluorescent	3500K	1150	9	1-1/10" L x 1-1/10" W x 24-1/10" H
C-T824-A-17W-40K-B1	17W Fluorescent	4000K	1150	9	1-1/10" L x 1-1/10" W x 24-1/10" H
C-T824-A-17W-50K-B1	17W Fluorescent	5000K	1150	9	1-1/10" L x 1-1/10" W x 24-1/10" H

NOTE: Individually sleeved T8s with UPC. Must order in Case Pack Qty of 25.

LED T8 TYPE B DOUBLE ENDED BYPASS RETROFIT

Easy Installation; High Efficiency; 5-Year Limited Warranty*



- CRI: >70 and/or >80
- Location Type: Damp
- Voltage: 120-277V
- Dimmable

- Finish Color: White, Frosted Glass
- Watts: 12 or 14
- Mounting: Medium Bipin
G13 Base Surface Mount

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-T836-A-25W-35K-B1	25W Fluorescent	3500K	1500	12	1-1/10" L x 1-1/10" W x 36-1/10" H
C-T836-A-25W-40K-B1	25W Fluorescent	4000K	1500	12	1-1/10" L x 1-1/10" W x 36-1/10" H
C-T836-A-25W-50K-B1	25W Fluorescent	5000K	1500	12	1-1/10" L x 1-1/10" W x 36-1/10" H
C-T848-A-32W-35K-B1	32W Fluorescent	3500K	1800	14	1-1/10" L x 1-1/10" W x 48-1/10" H
C-T848-A-32W-40K-B1	32W Fluorescent	4000K	1800	14	1-1/10" L x 1-1/10" W x 48-1/10" H
C-T848-A-32W-50K-B1	32W Fluorescent	5000K	1800	14	1-1/10" L x 1-1/10" W x 48-1/10" H

LED ROUND HIGH BAYS

**Light-Weight; Easy Installation; High Efficiency;
5-Year Limited Warranty***



LED Round High Bay



LED Round High Bay†

- CRI: >80
- Location Type: Damp
- Voltage: 120-277V
- Dimmable

- Finish Color: White
- High LPW: up to 130
- Watts: 60 to 232

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-HB-A-RD-7L-40K-UL-WH	150W PSMH / 175W MH	4000K	7600	60	6-3/4" H x 10-7/8" Diameter
C-HB-A-RD-7L-50K-UL-WH	150W PSMH / 175W MH	5000K	7600	60	6-3/4" H x 10-7/8" Diameter
C-HB-A-RD-13L-40K-UL-WH	250W PSMH	4000K	13000	100	6-3/4" H x 10-7/8" Diameter
C-HB-A-RD-13L-50K-UL-WH	250W PSMH	5000K	13000	100	6-3/4" H x 10-7/8" Diameter

† Shown with Prismatic Reflector – sold separately.

LED ROUND HIGH BAYS

**Light-Weight; Easy Installation; High Efficiency;
5-Year Limited Warranty***



LED Round High Bay

- CRI: >80
- Location Type: Damp
- Voltage: 120-277V
- Dimmable



LED Round High Bay†

- Finish Color: White
- High LPW: up to 130
- Watts: 60 to 232

SKU	Replaces	CCT	Lumens	Watts	Dimensions
C-HB-A-RD-20L-40K-UL-WH	320W PSMH	4000K	19600	148	8-1/4" H x 13-3/8" Diameter
C-HB-A-RD-20L-50K-UL-WH	320W PSMH	5000K	19600	148	8-1/4" H x 13-3/8" Diameter
C-HB-A-RD-30L-40K-UL-WH	400W PSMH	4000K	30000	232	8-1/4" H x 13-3/8" Diameter
C-HB-A-RD-30L-50K-UL-WH	400W PSMH	5000K	30000	232	8-1/4" H x 13-3/8" Diameter

† Shown with Prismatic Reflector – sold separately.

LED HIGH BAY ACCESSORIES

Accessories for C-Lite® High Bays



Round High Bay White
Aluminum Reflector




Round High Bay Clear
Prismatic Reflector



Round High Bay Clear
Prismatic Conical Lens



Round High Bay Clear
Prismatic Drop Lens



Round High Bay
Wire Guard Accessory

Item	SKU	Size/Fits
Round High Bay White Aluminum Reflector	C-HB-A-RD-HBAR	Suits HB-A-RD Series 5 1/4" H x 16" Diameter
Round High Bay Clear Prismatic Reflector	C-HB-A-RD-HBPR	Suits HB-A-RD Series 5 1/4" H x 16" Diameter
Round High Bay Clear Prismatic Drop Lens	C-HB-A-RD-HBDL	Suits HB-A-RD Series 3 1/2" H x 16" Diameter
Round High Bay Clear Prismatic Conical Lens	C-HB-A-RD-HBCL	Suits HB-A-RD Series 1 1/2" H x 16" Diameter
Round High Bay Pendant Mount Accessory White	C-HB-A-RD-HBPM-WH	Suits HB-A-RD Series 2 1/4" H x 1 1/2" Diameter
Round High Bay Wire Guard Accessory	C-HB-A-RD-HBWG	Suits HB-A-RD Series 1 1/2" H x 16" Diameter

LED LINEAR HIGH BAYS

Easy Installation; High Efficiency; 5-Year Limited Warranty*



Premium LED Linear High Bays

- CRI: >80
- Location Type: Damp
- Voltage: 120-277V
- Dimmable: 0-10V dimming to 10%
- White
- High LPW: 135
- Watts: 110 to 223
- Replaces up to 6 Lamps, 54T5HO, 400W PSMH

SKU	CCT	Lumens	Watts	Dimensions
C-PHB-B-L2F-15L-40K-UL-WH	4000K	15000	110W	23-4/5" L x 12-3/5"W x 3-3/5" H
C-PHB-B-L2F-15L-50K-UL-WH	5000K	15000	110W	23-4/5" L x 12-3/5"W x 3-3/5" H
C-PHB-B-L2F-22L-40K-UL-WH	4000K	22000	162W	23-4/5" L x 17-3/10"W x 3-3/5" H
C-PHB-B-L2F-22L-50K-UL-WH	5000K	22000	162W	23-4/5" L x 17-3/10"W x 3-3/5" H
C-PHB-B-L2F-30L-40K-UL-WH	4000K	30000	223W	46" L x 12-3/5"W x 3-3/5" H
C-PHB-B-L2F-30L-50K-UL-WH	5000K	30000	223W	46" L x 12-3/5"W x 3-3/5" H

LED HIGH BAY ACCESSORIES

Accessories for C-Lite® High Bays



Premium Linear
High Bay PIR Sensor



Premium Linear High Bay
Pendant Mount Kit



Linear High Bay
Frosted Lens



Premium Linear High Bay
Wire Guard

Item	SKU	Size/Fits
Premium Linear High Bay PIR Sensor	C-PHB-A-HBPIR	Suits C-PHB Series
Premium Linear High Bay Pendant Mount Kit	C-PHB-A-HBPM	Suits C-PHB Series
Linear High Bay Frosted Lens	C-HB-A-LHBFL-12X48	Suits C-HB Series 12" x 47-1/2" Fixtures
Premium Linear High Bay Wire Guard	C-PHB-A-LHBWG-12X24	Suits C-PHB Series 12-3/5" x 23-4/5" Fixtures
Premium Linear High Bay Wire Guard	C-PHB-A-LHBWG-18X24	Suits C-PHB Series 17-3/10" x 23-4/5" Fixtures
Premium Linear High Bay Wire Guard	C-PHB-A-LHBWG-12X46	Suits C-PHB Series 12-3/5" x 46" Fixtures

LED HIGH BAY ACCESSORIES

Accessories for C-Lite® High & Low Bays



LED Hook & Cord Kits

Item	SKU	Size/Fits
LED Hook & Cord Kit, 6', 120-277V, No Plug	C-ACC-A-HKCRD-6FT-LV-NP	6', 120V-277V, No Plug, Fits 120-277V High Bays / Low Bays
LED Hook & Cord Kit, 6', 120V, Twist Lock Plug	C-ACC-A-HKCRD-6FT-LV-TL	6', 120V, Twist Lock Plug, Fits 120V High Bays / Low Bays
LED Hook & Cord Kit, 6', 120V, Straight Blade Plug	C-ACC-A-HKCRD-6FT-LV-SB	6', 120V, Straight Blade Plug, Fits 120V High Bays / Low Bays
LED Hook & Cord Kit, 6', 277V, Twist Lock Plug	C-ACC-A-HKCRD-6FT-HV-TL	6', 277V, Twist Lock Plug, Fits 277V High Bays / Low Bays

LED HIGH BAY ACCESSORIES

Accessories for C-Lite® High & Low Bays



LED Hook & Cord Kits



1/2" Hook

Item	SKU	Size/Fits
LED Hook & Cord, 208-240V, Twist Lock Plug	C-ACC-A-HKCRD-6FT-MV-TL	6', 208-240V, Twist Lock Plug, Fits 208-240V High Bays / Low Bays
1/2" Hook	C-ACC-A-HK12	1/2", Fits High Bays / Low Bays

GENERAL LED ACCESSORIES

Quality; Reliability



Cord, 6', Straight Blade Plug



Cord, 6', Twist Lock Plug

Item	SKU	Size/Fits
LED Cord w-Strain Relief	C-ACC-A-CRDS-6FT-LV-TL	6', 120V, Twist Lock Plug, Fits any 120V Fixture
LED Cord w-Strain Relief	C-ACC-A-CRDS-6FT-LV-SB	6', 120V, Straight Blade Plug, Fits any 120V Fixture
LED Cord w-Strain Relief	C-ACC-A-CRDS-6FT-HV-TL	6', 277V, Twist Lock Plug, Fits any 277V Fixture
LED Cord w-Strain Relief	C-ACC-A-CRDS-6FT-MV-TL	6', 208-240V, Twist Lock Plug, Fits any 208-240V Fixture

GENERAL LED ACCESSORIES

Quality; Reliability



Cord, 6', Straight Blade Plug



Cord, 6', Twist Lock Plug

Item	SKU	Size/Fits
LED Cord	C-ACC-A-CRD-6FT-LV-TL	6', 120V, Twist Lock Plug, Fits any 120V Fixture
LED Cord	C-ACC-A-CRD-6FT-LV-SB	6', 120V, Straight Blade Plug, Fits any 120V Fixture
LED Cord	C-ACC-A-CRD-6FT-MV-TL	6', 208-240V, Twist Lock Plug, Fits any 208-240V Fixture
LED Cord	C-ACC-A-CRD-6FT-HV-TL	6', 277V, Twist Lock Plug, Fits any 277V Fixture

GENERAL LED ACCESSORIES

Quality; Reliability



Receptacle, 15A, Twist Lock

Item	SKU	Size/Fits
LED Receptacle	C-ACC-A-RECEP-LV-TL	3-Wire, 15A / 120V, Twist Lock
LED Receptacle	C-ACC-A-RECEP-HV-TL	3-Wire, 15A / 277V, Twist Lock
LED Receptacle	C-ACC-A-RECEP-MV-TL	3-Wire, 15A / 208-240V, Twist Lock

LED LAMPS

Best Union of Performance and Value; 5-Year Limited Warranty*



A19

- CRI: ≥ 80
- Initial Delivered Lumens: 440 to 1050
- Non-Dimmable
- Base: E26

SKU	Replaces	CCT	Lumens	Watts	LPW	Base Type	Pack Size
C-A19-A-40W-ND-27K-B4	40W [†]	2700K	440	5.5	80	E26	4 Pack
C-A19-A-60W-ND-27K-B4	60W [†]	2700K	750	9.0	84	E26	4 Pack
C-A19-A-60W-ND-30K-B4	60W [†]	3000K	750	9.0	84	E26	4 Pack
C-A19-A-75W-ND-27K-B2	75W [†]	2700K	1050	11.0	95	E26	2 Pack

[†]Incandescent

LED LAMPS

Best Union of Performance and Value; 5-Year Limited Warranty*



A19

- CRI: ≥ 80
- Initial Delivered Lumens: 450 to 1100



BR30

- Dimmable
- Base: E26

SKU	Replaces	CCT	Lumens	Watts	LPW	Base Type	Pack Size
C-A19-A-40W-DIM-27K-B2	40W [†]	2700K	450	6.0	75	E26	2 Pack
C-A19-A-60W-DIM-27K-B2	60W [†]	2700K	800	9.0	89	E26	2 Pack
C-A19-A-60W-DIM-30K-B2	60W [†]	3000K	800	9.0	89	E26	2 Pack
C-A19-A-75W-DIM-27K-B2	75W [†]	2700K	1100	12.0	92	E26	2 Pack
C-BR30-A-65W-DIM-27K-B2	65W [†]	2700K	750	8.5	88	E26	2 Pack
C-BR30-A-65W-DIM-30K-B2	65W [†]	3000K	800	8.5	94	E26	2 Pack

[†]Incandescent

PROFESSIONAL SERIES A19 LED LAMPS

Light Your Space like a Pro; 5-Year Limited Warranty*



A19

- CRI: 90+
- Omnidirectional Light
- Smooth Dimming
- Damp Location Rated
- Meets ENERGY STAR, CEC Title 20/ Title 24 JA-8 Requirements

SKU	Replaces	CCT	Lumens	Watts	LPW	Base Type
A19-40W-P1-27K-E26-U1	40W Incandescent	2700K	460	5.5	84	E26
A19-40W-P1-30K-E26-U1	40W Incandescent	3000K	460	5.5	84	E26
A19-40W-P1-50K-E26-U1	40W Incandescent	5000K	460	5.5	84	E26
A19-60W-P1-27K-E26-U1	60W Incandescent	2700K	815	10	81	E26
A19-60W-P1-30K-E26-U1	60W Incandescent	3000K	815	10	81	E26
A19-60W-P1-40K-E26-U1	60W Incandescent	4000K	815	10	81	E26
A19-60W-P1-50K-E26-U1	60W Incandescent	5000K	815	10	81	E26

PROFESSIONAL SERIES A19 & A21 LED LAMPS

Light Your Space like a Pro; 5-Year Limited Warranty*



A19

- CRI: 90+
- Omnidirectional Light
- Smooth Dimming



A21

- Damp Location Rated
- Meets ENERGY STAR, CEC Title 20/ Title 24 JA-8 Requirements

SKU	Replaces	CCT	Lumens	Watts	LPW	Base Type
A19-75W-P1-27K-E26-U1	75W Incandescent	2700K	1100	12	92	E26
A19-75W-P1-30K-E26-U1	75W Incandescent	3000K	1100	12	92	E26
A19-75W-P1-50K-E26-U1	75W Incandescent	5000K	1100	12	92	E26
A21-100W-P1-27K-E26-U1	100W Incandescent	2700K	1600	17	94	E26
A21-100W-P1-30K-E26-U1	100W Incandescent	3000K	1600	17	94	E26
A21-100W-P1-50K-E26-U1	100W Incandescent	5000K	1600	17	94	E26
A21-3WAY-P1-27K-E26-U1	3 Way Incandescent	2700K	450/ 800/ 1420	5.5/ 9/17	84	E26

PROFESSIONAL SERIES PAR20 LED LAMPS

Optimal for Display and Track Lights; 5-Year Limited Warranty*



PAR20

- CRI: 90+
- Smooth Dimming
- Multiple Beam Angles for More Applications
- Meets ENERGY STAR and CEC Title 20 Requirements

SKU	Replaces	CCT	Lumens	Watts	LPW	Base Type
PAR20-50W-P1-27K-40FL-E26-U1	50W Incandescent	2700K	530	6	88	E26
PAR20-50W-P1-27K-25NF-E26-U1	50W Incandescent	2700K	530	6	88	E26
PAR20-50W-P1-27K-15SP-E26-U1	50W Incandescent	2700K	530	6	88	E26
PAR20-50W-P1-30K-40FL-E26-U1	50W Incandescent	3000K	550	6	92	E26
PAR20-50W-P1-30K-25NF-E26-U1	50W Incandescent	3000K	550	6	92	E26
PAR20-50W-P1-30K-15SP-E26-U1	50W Incandescent	3000K	550	6	92	E26
PAR20-50W-P1-40K-40FL-E26-U1	50W Incandescent	4000K	550	6	92	E26

PROFESSIONAL SERIES PAR30 LED LAMPS

Optimal for Display and Track Lights; 5-Year Limited Warranty*



PAR30L

- CRI: 90+
- Smooth Dimming
- Multiple Beam Angles for More Applications
- Meets ENERGY STAR and CEC Title 20 Requirements

SKU	Replaces	CCT	Lumens	Watts	LPW	Base Type
PAR30L-75W-P1-27K-40FL-E26-U1	75W Incandescent	2700K	1000	13	77	E26
PAR30L-75W-P1-27K-25NF-E26-U1	75W Incandescent	2700K	1000	13	77	E26
PAR30L-75W-P1-27K-15SP-E26-U1	75W Incandescent	2700K	1000	13	77	E26
PAR30L-75W-P1-30K-40FL-E26-U1	75W Incandescent	3000K	1050	13	81	E26

PROFESSIONAL SERIES PAR30 LED LAMPS

Optimal for Display and Track Lights; 5-Year Limited Warranty*



PAR30L

- CRI: 90+
- Smooth Dimming
- Multiple Beam Angles for More Applications
- Meets ENERGY STAR and CEC Title 20 Requirements

SKU	Replaces	CCT	Lumens	Watts	LPW	Base Type
PAR30L-75W-P1-30K-25NF-E26-U1	75W Incandescent	3000K	1050	13	81	E26
PAR30L-75W-P1-30K-15SP-E26-U1	75W Incandescent	3000K	1050	13	81	E26
PAR30L-75W-P1-40K-40FL-E26-U1	75W Incandescent	4000K	1050	13	81	E26

PROFESSIONAL SERIES PAR30 LED LAMPS

Optimal for Display and Track Lights; 5-Year Limited Warranty*



PAR30S

- CRI: 90+
- Smooth Dimming
- Multiple Beam Angles for More Applications
- Meets ENERGY STAR and CEC Title 20 Requirements

SKU	Replaces	CCT	Lumens	Watts	LPW	Base Type
PAR30S-75W-P1-27K-40FL-E26-U1	75W Incandescent	2700K	1000	13	77	E26
PAR30S-75W-P1-27K-25NF-E26-U1	75W Incandescent	2700K	1000	13	77	E26
PAR30S-75W-P1-27K-15SP-E26-U1	75W Incandescent	2700K	1000	13	77	E26
PAR30S-75W-P1-30K-40FL-E26-U1	75W Incandescent	3000K	1000	13	77	E26
PAR30S-75W-P1-30K-25NF-E26-U1	75W Incandescent	3000K	1000	13	77	E26
PAR30S-75W-P1-30K-15SP-E26-U1	75W Incandescent	3000K	1000	13	77	E26
PAR30S-75W-P1-40K-40FL-E26-U1	75W Incandescent	4000K	1050	13	81	E26

PROFESSIONAL SERIES PAR38 LED LAMPS

**Optimal for Outdoor Fixtures and Display Lights;
5-Year Limited Warranty***



PAR38

- Focused 40° flood beam
- 90+ CRI
- Smooth Dimming
- Meets ENERGY STAR and CEC Title 20 Requirements
- Weatherproof, Wet Location Rated
- Multiple Beam Angles for More Applications

SKU	Replaces	CCT	Lumens	Watts	LPW	Base Type
PAR38-120W-P1-27K-40FL-E26-U1	120W Incandescent	2700K	1330	17	78	E26
PAR38-120W-P1-27K-25NF-E26-U1	120W Incandescent	2700K	1330	17	78	E26
PAR38-120W-P1-27K-15SP-E26-U1	120W Incandescent	2700K	1330	17	78	E26
PAR38-120W-P1-30K-40FL-E26-U1	120W Incandescent	3000K	1370	17	81	E26
PAR38-120W-P1-30K-25NF-E26-U1	120W Incandescent	3000K	1370	17	81	E26
PAR38-120W-P1-30K-15SP-E26-U1	120W Incandescent	3000K	1370	17	81	E26
PAR38-120W-P1-40K-40FL-E26-U1	120W Incandescent	4000K	1370	17	81	E26
PAR38-150W-P1-30K-40FL-E26-U1	150W Incandescent	3000K	1500	19	79	E26

PROFESSIONAL SERIES MR LED LAMPS

Optimal for Display and Track Lights



MR16



GU10

- CRI: 90+
- Flood Lighting
- Smooth Dimming
- Damp Location Rated
- Meets ENERGY STAR and CEC Title 20 Requirements

SKU	Replaces	CCT	Lumens	Watts	LPW	Base Type
MR16-75W-P1-27K-35FL-GU53-U1	75W Incandescent	2700K	570	7.5	76	GU53
MR16-75W-P1-27K-25NF-GU53-U1	75W Incandescent	2700K	570	7.5	76	GU53
MR16-75W-P1-27K-15SP-GU53-U1	75W Incandescent	2700K	540	7	77	GU53
MR16-75W-P1-30K-35FL-GU53-U1	75W Incandescent	3000K	570	7.5	76	GU53
MR16-75W-P1-30K-25NF-GU53-U1	75W Incandescent	3000K	570	7.5	76	GU53
MR16-75W-P1-30K-15SP-GU53-U1	75W Incandescent	3000K	540	7	77	GU53
MR16-50W-P1-30K-35FL-GU10-U1	50W Incandescent	3000K	500	6	73	GU10
MR16-75W-P1-30K-35FL-GU10-U1	75W Incandescent	3000K	700	6.5	88	GU10

PROFESSIONAL SERIES BR30 LED LAMPS

**Optimal for Recessed Downlights and Track Lights;
5-Year Limited Warranty***



BR30

- CRI: 90+
- Flood Lighting
- Smooth Dimming
- Damp Location Rated
- Meets ENERGY STAR, CEC Title 20/
Title 24 JA-8 Requirements

SKU	Replaces	CCT	Lumens	Watts	LPW	Base Type
BR30-65W-27K-U1	65W Incandescent	2700K	665	8.8	76	E26
BR30-65W-30K-U1	65W Incandescent	3000K	665	8.8	76	E26
BR30-65W-40K-U1	65W Incandescent	4000K	665	8.8	76	E26
BR30-100W-P1-27K-E26-U1	100W Incandescent	2700K	1400	16	87	E26
BR30-100W-P1-30K-E26-U1	100W Incandescent	3000K	1400	16	87	E26
BR30-100W-P1-50K-E26-U1	100W Incandescent	5000K	1400	16	87	E26

PROFESSIONAL SERIES BR40 LED LAMPS

**Optimal for Recessed Downlights and Track Lights;
5-Year Limited Warranty***



BR40

- CRI: 90+
- Flood Lighting
- Smooth Dimming
- Damp Location Rated
- Meets ENERGY STAR, CEC Title 20/
Title 24 JA-8 Requirements

SKU	Replaces	CCT	Lumens	Watts	LPW	Base Type
BR40-120W-P1-27K-E26-U1	120W Incandescent	2700K	1750	23	76	E26
BR40-120W-P1-30K-E26-U1	120W Incandescent	3000K	1750	23	76	E26
BR40-120W-P1-50K-E26-U1	120W Incandescent	5000K	1750	23	76	E26

PROFESSIONAL SERIES R20 LED LAMPS

**Optimal for Recessed Downlights and Track Lights;
5-Year Limited Warranty***



R20

- CRI: 90+
- Flood Lighting
- Smooth Dimming
- Damp Location Rated
- Meets ENERGY STAR, CEC Title 20/
Title 24 JA-8 Requirements

SKU	Replaces	CCT	Lumens	Watts	LPW	Base Type
R20-50W-P1-27K-E26-U1	50W Incandescent	2700K	560	7	80	E26
R20-50W-P1-50K-E26-U1	50W Incandescent	5000K	560	7	80	E26
R20-75W-P1-27K-E26-U1	75W Incandescent	2700K	980	13	75	E26
R20-75W-P1-50K-E26-U1	75W Incandescent	5000K	980	13	75	E26

PROFESSIONAL SERIES B11 LED LAMPS

**Optimal for Decorative Lighting, Chandeliers,
and Ceiling Fans; 5-Year Limited Warranty***



B11

- Clear glass shell offers omnidirectional light
- 90+ CRI
- Smooth Dimming
- Meets ENERGY STAR, CEC Title 20/ Title 24 JA-8 Requirements

SKU	Replaces	CCT	Lumens	Watts	LPW	Base Type
B11-25W-P1-27K-E12-U1	25W Incandescent	2700K	220	2.6	85	E12
B11-25W-P1-50K-E12-U1	25W Incandescent	5000K	220	2.6	85	E12
B11-40W-P1-27K-E12-U1	40W & 60W Incandescent	2700K	350	4	87	E12
B11-40W-P1-50K-E12-U1	40W & 60W Incandescent	5000K	350	4	87	E12
B11-60W-P1-27K-E12-U1	40W & 60W Incandescent	2700K	515	5.5	94	E12
B11-60W-P1-50K-E12-U1	40W & 60W Incandescent	5000K	515	5.5	94	E12

Learn more at: creelighting.com/c-lite | 800.236.6800

C-LITE | **CREE**  **LIGHTING**

LED LIGHTING

PRO
SERIES

©2020 Cree Lighting, A company of IDEAL INDUSTRIES. Cree®, the Cree logo, and the C-LITE LED Lighting by Cree logo are registered trademarks of Cree, Inc. For informational purposes only. Not a warranty or specification. ENERGY STAR® is a registered trademark of U.S. EPA. CAT/CREE-0516 Rev. Date 01/10/2020