HU11
Value LED Undercabinet

HALO

3
seleCCTable™
colors

halolighting.com

HU11 Value LED undercabinet

HALO® introduces the HU11 to address your LED undercabinet and task lighting needs.

Ideal for task, accent, office, cove, utility and display lighting, the HALO Undercabinet low-profile design delivers maximum energy savings and long life. The integrated driver allows 120V direct to the fixture for easy installation. Available in multiple lengths, the HU11 can be configured to fit almost anywhere. The HU11 has smooth dimming down to 5% using a TRIAC (leading edge) or ELV (trailing edge) dimmer. Connector cables, in a variety of different lengths, make it easy to link one unit to another. Each unit features an integrated on-off switch.

Features

- SeleCCTable™ color temperature for flexible lighting effects and applications (2700K, 3000K or 4000K)
- Sleek and seamless <1" profile
- Delivers up to 60 Lumens per Watt
- 90 CRI
- Dimmable down to 5% with select 120V dimmers
- Multiple wiring options including flexible conduit, romex or plugin
- Back wire option for increased space utilization***
- 120V input
- Lumen maintenance (L70) at 50,000 hours
- 5-year warranty
- Damp location listed

Selectable CCT

Three position external seleCCTable color temperature switch allows users to choose between 2700K, 3000K, and 4000K and adjust to their lighting needs.

Dimensions

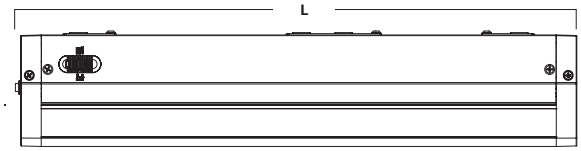

Size	9 in. Nominal	18 in. Nominal	24 in. Nominal	36 in. Nominal	48 in. Nominal
Length "L"	8.98" [228.1mm]	16.55" [420.4mm]	23.98" [609.1mm]	32.44" [824mm]	47.18" [1,198.4mm]

Energy Data

	Lumens	120V Input Watts
9" Fixture	300	4.5
18" Fixture	560	8.0
24" Fixture	785	11.0
36" Fixture	1125	15.5
48" Fixture	1540	21.0

Power Factor	> 0.9
THD	< 20%
Color Temperature	2700K 3000K 4000K
Color Rendering Index	90
Nominal Lumens/Ft.	300

Can be used for IECC International Energy Conservation Code High Efficacy Compliance

CERTIFIED SAFETY

Efficiency Standards T24 California Title 24 Residential and Non-Residential Compliant

Ordering Information

Sample Number: **HU1118DSP** (18" dimmable fixture, 90 CRI, seleCCTable color temperature, White finish)

Family	Length	Dimming	Color Temp	Finish
HU11= Halo integrated undercabinet	**09**= 9" **18**= 18" **24**= 24" **36**= 36" **48**= 48"	**D9**= Dimmable	**S**= Selectable (2700K, 3000K, 4000K)	**P**= White **MB**= Matte Black

Connectors & Accessories

3" Daisy Chain Connector
HU101



6" Daisy Chain Connector
HU102

12" Daisy Chain Connector
HU1010

18" Daisy Chain Connector
HU1011

24" Daisy Chain Connector
HU103

120" Daisy Chain Connector
HU104

48" Power Cord - 120V only
HU115

1-1/2" Male-to-Male Connector
HU107

Splice Box
HU109



Master Switch
HU10MS

Finish: P = White; MB = Matte Black
Example: HU101P = 3" Daisy Chain Connector, White

Wiring Flexibility

The HU11 has the ability to bring flexible conduit or armored cable directly into the fixture from the back to allow for increased space savings. Conduit connector and armored cable strain relief hardware is included in each fixture. In addition, users can also utilize the various available plug in connectors for 120V applications.

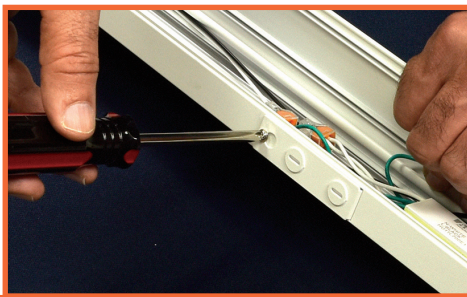

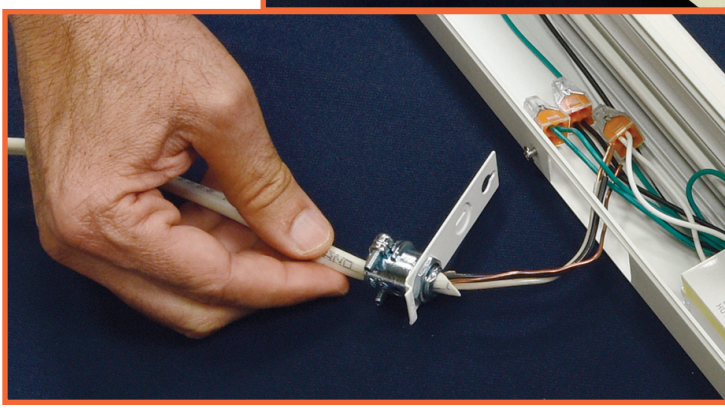

Cooper Lighting Solutions
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.halolighting.com

Canada Sales
5925 McLaughlin Road
Mississauga, Ontario L5R 1B8
P: 905-501-3000
F: 905-501-3172

Our Lighting Product Lines
Ametrix
AtLite
Corelite
Ephesus
Fail-Safe
HALO
HALO Commercial
Invue
io
IRiS
Lumark
Lumière
McGraw-Edison
Metalux
MWS
Neo-Ray
Portfolio
RSA
Shaper
Streetworks
Sure-Lites

Our Controls Product Lines
Fifth Light Technology
Greengate
iLight (International Only)
iLumin
Zero 88

Connected Lighting Systems
Distributed Low-Voltage Power
HALO Home
iLumen Plus
LumaWatt Pro
WaveLinx

Cooper Lighting Solutions
1121 Highway 74 South
Peachtree City, GA 30269
P: 770-486-4800
www.halolighting.com

© 2020 Cooper Lighting Solutions
All Rights Reserved
Printed in USA
Publication No. BR518065EN
February 2020

Products, specifications and compliances are subject to change without notice.

Cooper Lighting Solutions is a registered trademark.

All other trademarks are property of their respective owners.