

# Rittal – The System.

Faster – better – everywhere.

## ► Component Shelf, Static Installation For 482.6 mm (19") system punching, depth-variable for TS IT, TE – DK 5501.655

Date : May 29, 2018

ENCLOSURES

POWER DISTRIBUTION

CLIMATE CONTROL

IT INFRASTRUCTURE


SOFTWARE & SERVICES

FRIEDHELM LOH GROUP



# Component Shelf, Static Installation For 482.6 mm (19") system punching, depth-variable for TS IT, TE – DK 5501.655

created: 29.05.2018 build on [www.rittal.com/us-en](http://www.rittal.com/us-en)

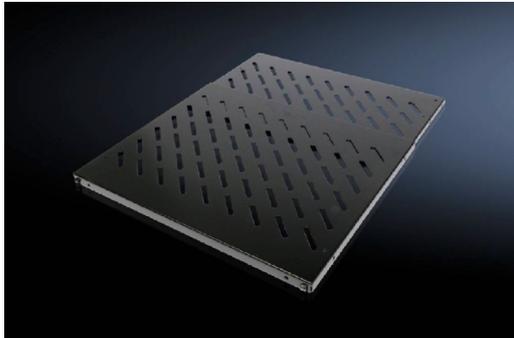

## Product description

<b>Benefits:</b>	Tool-free, time-saving one-person assembly
<b>Applications:</b>	Depth-variable to adapt to individual distances between levels
<b>Material:</b>	Carbon steel
<b>Surface finish:</b>	Spray-finished
<b>Color:</b>	RAL 9005
<b>Supply includes:</b>	Assembly components

## Product features

<b>Suitable for:</b>	Enclosure type: TS IT Enclosure type: TE 7000 Enclosure type: TE 8000
<b>Dimensions:</b>	Width: 484 mm (19 ")
<b>Installation options:</b>	482.6 mm (19") L-profile rails, front and rear 482.6 mm (19") mounting frames, front and rear
<b>Distance between levels:</b>	min.: 400 mm (16 ") max.: 600 mm (24 ")

<b>Height units:</b>	0.5 U
<b>Load capacity:</b>	50 kg
<b>Packaging unit:</b>	1 pc(s).
<b>Weight/packaging unit:</b>	6.56 kg (14.5 lb.)
<b>EAN:</b>	4028177679092
<b>Customs tariff number:</b>	73269098
<b>ETIM 6.0:</b>	EC002620
<b>ETIM 5.0:</b>	EC002620
<b>eCl@ss 8.0/8.1:</b>	27189261
<b>eCl@ss 7.0/7.1:</b>	27189261
<b>eCl@ss 6.0/6.1:</b>	27189261
<b>eCl@ss 5.1/5.1.4:</b>	27189218
<b>Product description (long):</b>	DK Component shelf, WxH: 484 mm x 0,5 U, 50 kg, distance between levels: 400-600 mm, depth-variable, RAL 9005