


**Note:**

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

**ATV630D22N4**

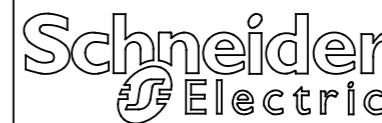

Schneider Electric United States  
 North American Division  
 Boston One Campus  
 800 Federal Street  
 Andover, MA 01810, USA  
 Phone: +1 8773425173  
 Email: CCC@us.schneider-electric.com

**Technical Information:**

Control Voltage: 24Vdc  
 STO inputs: STOA, STOB  
 Digital Inputs: 6  
 Analog Inputs: 3  
 Analog Outputs: 2  
 Relay Output: 1 NO/NC, 2 NO  
 Communication Ports: Ethernet and Modbus  
 Weight [lb/kg]: 31.5 /  
 UL File No.: E116875  
 CSA File: 224330  
 Other: TUV, REACH, CE marked

	Normal Duty:	Heavy Duty:
Application:	110% for 60 sec	150% for 60 sec
HP Rating:	30	25
kW Rating:	22	18
Output Ampere Rating:	46.3	39.2
Disipated Watts:	505	505
Disipated Watts into enclosure if using kit to externally mount heatsink:	68	68

**Description:** Variable Speed Drive  
**Family:** Altivar Process 600  
**Product Line:** AC Drives  
**Voltage Rating:** 400/480VAC  
**Input Phase:** 3-Phase  
**Output Phase:** 3-Phase  
**Enclosure Rating:** Type 1  
**Frame Size:** S3

**Specification:**