

## T4XA Thermostat

### Ambient Sensing Adjustable Temperature NEMA 4X

#### DESCRIPTION

The T4XA thermostat is intended for temperature control of a variety of electric heating cables for freeze protection pipe tracing or roof/gutter de-icing. The T4XA is suitable for indoor/outdoor locations having hostile, non-hazardous environments.



#### ENCLOSURE

NEMA 4X Polyurethane-coated Die Cast Aluminum  
(max. 0.6% copper)

#### TEMPERATURE RANGE

Adjustable  
15°F to 140°F (-9°C to 60°C)

#### Calibration Accuracy

1.3°F (0.7°C)

#### CAPILLARY

Length	Material
N/A	Stainless Steel

Max. Exposure Temp.  
160°F (71°C)


#### ELECTRICAL

SPDT Switch  
22 amp Resistive, 125/250/480 VAC  
10 – 14 AWG Terminals

#### APPROVALS


UL  
CSA

#### OUTLINE

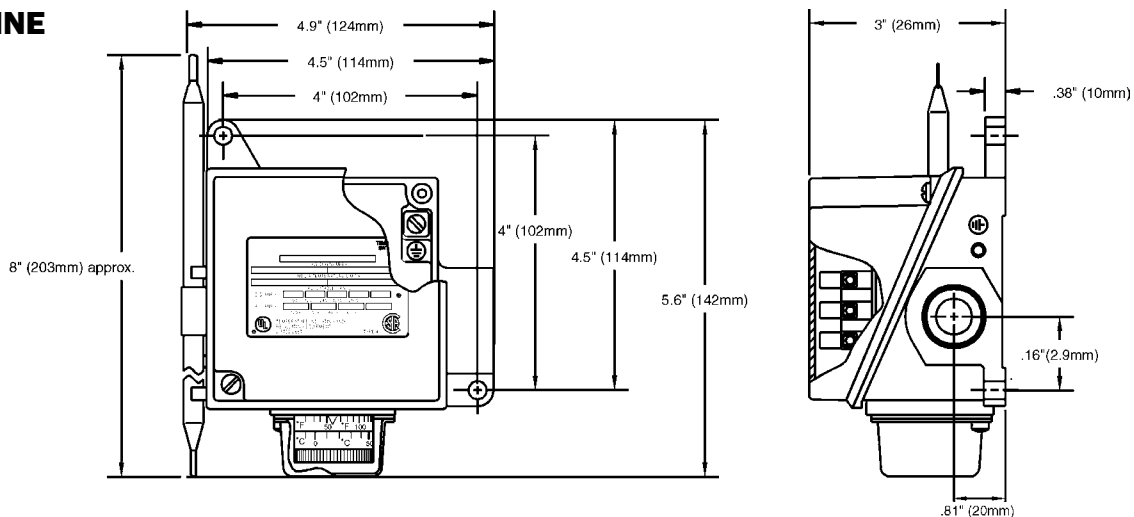


## INSTALLATION

### MI Trace Sample Installation

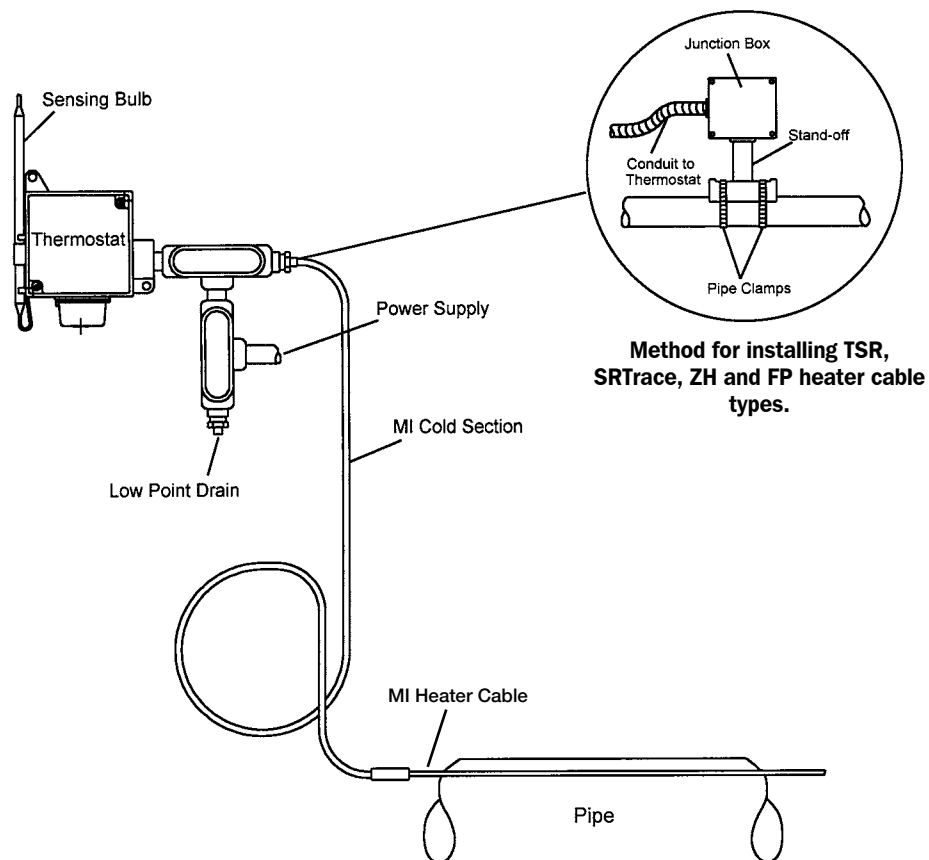

## WIRING

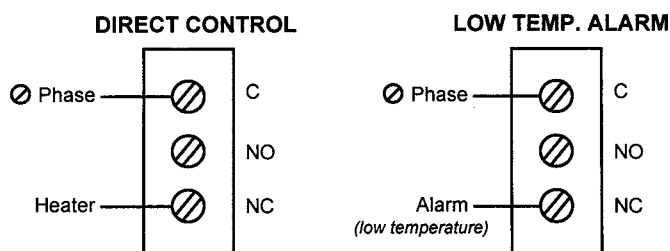

## ANNUAL MAINTENANCE

- 1 Remove cover.
- 2 Spray a coat of lubricant and rust preventative such as CRC Stor & Lube, electrical grade, on thermostat body.
- 3 Replace cover.