

# Product data sheet

## Characteristics

# 9070T2000D1

Transformer, Type T, industrial control, 2000 VA, 240/480 VAC primary / 120 VAC second, 1 phase, 50/60 Hz, 115 °C rise



### Main

Product or component type	Industrial Control Transformer
Power Rating	2000 VA
Primary Voltage	240 x 480 V 230 x 460 V 220 x 440 V
Secondary Voltage	115 V 110 V 120 V
Type	T

### Complementary

Number of Phases	1 phase
Power Rating	2000 VA UL 2000 VA CSA 2000 VA NOM 1500 VA
Primary to Secondary Voltage	220 x 440 V 110 V 230 x 460 V 115 V 240 x 480 V 120 V
Temperature rise	115 °C
Electrical connection	Screw clamp terminals
Maximum Height	6.17 in (156.72 mm)
Maximum Width	7.06 in (179.32 mm)
Maximum Depth	7.17 in (182.12 mm)
Material	Copper winding
Fingersafe Cover Compatibility	FSC2

### Environment

Product certifications	CSA file LR37055 guide 184-N-90 UL listed file E61239
Enclosure Type	Not rated (open device)
Insulation temperature	356 °F (180 °C)

### Ordering and shipping details

Category	16201 - 9070 T (NOT TF) 250-2000VA
Discount Schedule	CP8
GTIN	00785901876045
Nbr. of units in pkg.	1
Package weight(Lbs)	48.6 lb(US) (22.04 kg)
Returnability	Yes
Country of origin	MX

## Packing Units

Package 1 Height	12.00 in (30.480 cm)
Package 1 width	12.10 in (30.734 cm)
Package 1 Length	15.00 in (38.100 cm)


## Offer Sustainability

Sustainable offer status	Green Premium product
REACH Regulation	<a href="#">REACH Declaration</a>
REACH free of SVHC	Yes
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Toxic heavy metal free	Yes
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
PVC free	Yes

## Contractual warranty

Warranty	10 Years
----------	----------

Approximate Dimensions

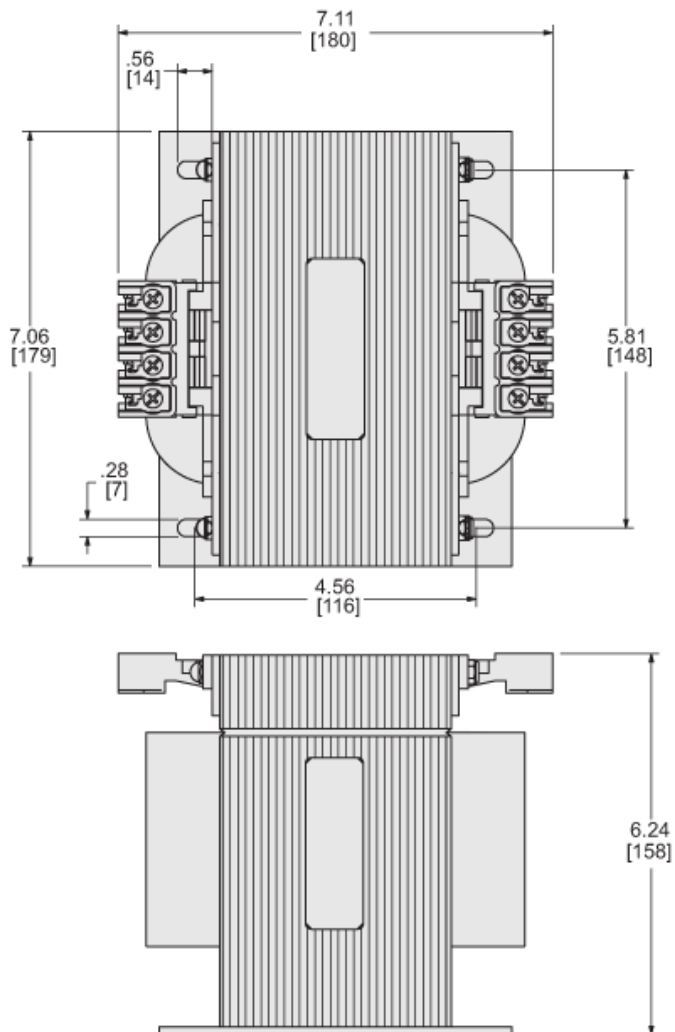

Connections and Wiring Diagrams

Voltage and Connection Options

Voltage Code	Voltages		Connections	
	Primary	Secondary	Primary	Secondary
D1	220 x 440	110	220/230/240 V: Connect to H1 and H4 Jumper H1 and H3	Connect to X1 and X2
	230 x 460	115	Jumper H2 with H4	
	240 x 480	120	440/460/480 V: Connect to H1 and H4 Jumper H2 with H3	

