




4 3 2 1



Transformer Specifications			
PRIMARY VOLTAGE(S)	120x240		
SECONDARY VOLTAGE(S)	24		
RATED VA	300		
RATED FREQUENCY	50/60		
INSULATION CLASS	130		
AGENCY APPROVALS	UL, CUL		
ESTIMATED WEIGHT	110 LBS		

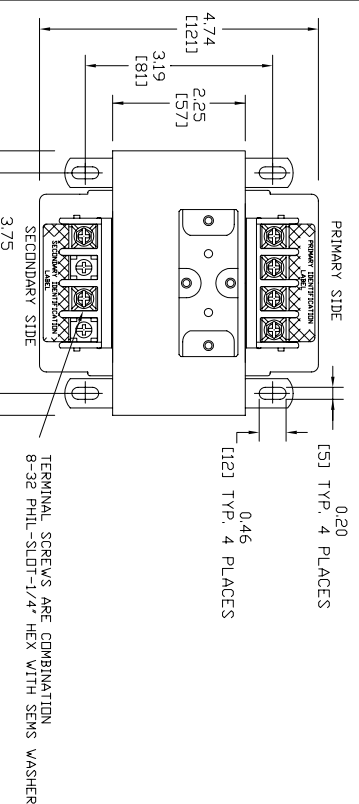
  

TEST REQUIREMENTS			
WINDING	H4-H3	H2-H1	X2-X1
DC VOLTS	120	120	240
LOAD VOLTS	120	120	24
FL. AMPS	1.547	1.547	12.50
H1-P01	3000V		
EXCITING AMPS	1.20AMPS @ 120 VOLTS, 50HZ		
EXCITING WATTS	232 MAX		

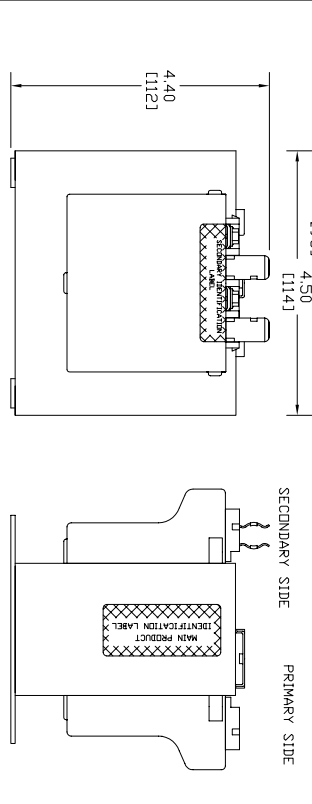

NOTE:  
1. ALL MEASUREMENTS IN INCHES (MM)

**Culter-Hammer**  
INDUSTRIAL CONTROL TRANSFORMER  
300VA 50/60Hz  
TEMP CL. 130°C  
CAT. NO. C0300E1B  
SERIES 2  
42003

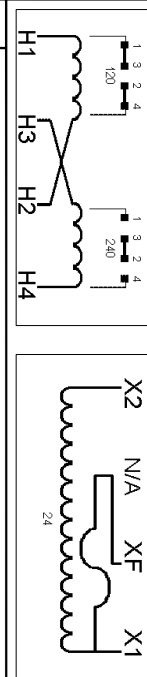

REVISION	DT
1	

UNLESS OTHERWISE SPECIFIED		DRAWER/DESIGNER		DATE	
ONE PLACE DEC	40:1	APPD	S. CASTRO	DATE	07/02/09
THIRD ANGLE PROJECTION	17/02/09	DATE	07/02/09	DATE	07/02/09
ANGLES 24x DEC	40:9	APPD	0 SANDOVAL	DATE	07/02/09
VOLTAJE	43%	ENGR REF			
AMPERIAJE	42%				
FORCE TORQUE SPEED	110%				
TEMPERATURE	43.75°F				
DIMENSIONS TO BE INTERPRETED IN ACCORDANCE WITH	ASME Y14.5M-1994				
STANDARD DEFINITIONS	FOR DRAWING 692/72				
TOOL REF					
NSFC					

INDUSTRIAL CONTROL TRANSFORMER  
TITLE  
Eaton Corporation - CONFIDENTIAL AND PROPRIETARY  
NOTICE TO READER: THIS DOCUMENT AND/OR DRAWING IS THE EXCLUSIVE PROPERTY OF EATON CORPORATION. IT IS CONFIDENTIAL AND IS TO BE KEPT CONFIDENTIAL. BY MAKING POSSESSION OF THIS DOCUMENT, THE READER ACKNOWLEDGES AND AGREES THAT THIS DOCUMENT CANNOT BE REPRODUCED OR TRANSMITTED IN ANY FORM OR BY ANY MEANS, ELECTRONIC OR MECHANICAL, INCLUDING PHOTOCOPYING, RECORDING, OR BY ANY INFORMATION STORAGE AND RETRIEVAL SYSTEM, WITHOUT THE WRITTEN PERMISSION OF EATON CORPORATION. THIS NOTICE SHALL GOVERN THE STATUS OF THIS DOCUMENT.