

CorePro LEDtube InstantFit T8

17T8 PRO LED/48-4000 BB G 1PK 10/1

The CorePro LED Type A - Ballast Driven InstantFit TLED is a great LED solution suitable for replacing T8 fluorescent lamps, using the existing ballast. The InstantFit (Type A) lamps can also be used with Philips TLED drivers for Type C applications.

Product data

General Information	
Base	G13 [Medium Bi-Pin Fluorescent]
Nominal Lifetime (Nom)	50000 h
Switching Cycle	50000X
B50L70	50000 h
Light Technical	
Color Code	841 [CCT of 4100K (841)]
Initial lumen (Nom)	2100 lm
Luminous Flux (Rated) (Nom)	2100 lm
Correlated Color Temperature (Nom)	4000 K
Color Consistency	<6
Color Rendering Index (Nom)	80
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	50 to 60 Hz
Power (Rated) (Nom)	17 W
Lamp Current (Nom)	146 mA
Starting Time (Nom)	1 s
Warm Up Time to 60% Light (Nom)	1 s


Power Factor (Nom)	0.9
Voltage (Nom)	120-277 V
Temperature	
T-Ambient (Max)	45 °C
T-Ambient (Min)	-20 °C
T-Storage (Max)	65 °C
T-Storage (Min)	-40 °C
T-Case Maximum (Nom)	55 °C
Controls and Dimming	
Dimmable	No
Mechanical and Housing	
Product Length	1200 mm
Approval and Application	
Energy Saving Product	Yes
Approbation Marks	UL certificate RoHS compliance

CorePro LEDtube InstantFit T8

Product Data	
Order product name	17T8 PRO LED/48-4000 BB G 1PK 10/1
EAN/UPC - Product	046677471767
Order code	471763
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	10

Material Nr. (12NC)	929001363304
Net Weight (Piece)	0.215 kg
Model Number	9290013633



Dimensional drawing

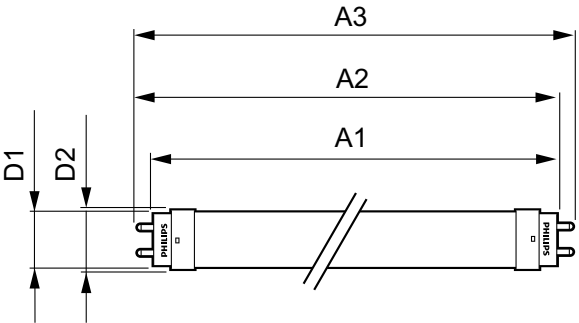

TLED IF CorePro 4ft 2100lm 4000K


Product	D1	D2	A1	A2	A3
17T8 PRO LED/48-4000 BB G 1PK 10/1	25.7 mm	26 mm	1200 mm	1207 mm	1214 mm

Photometric data

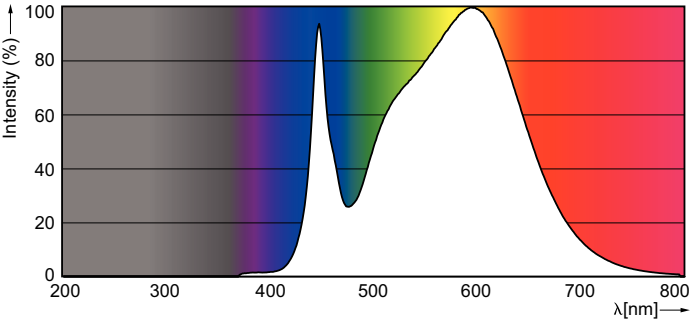

LEDtube 16.5 W, 840, G13, T8, UHO



Mains DLC 120-277V 17W 2100lm 4000K ND



Mains DLC 17W 2000-2100lm 3000_5000K ND



CorePro LEDtube InstantFit T8

Lifetime

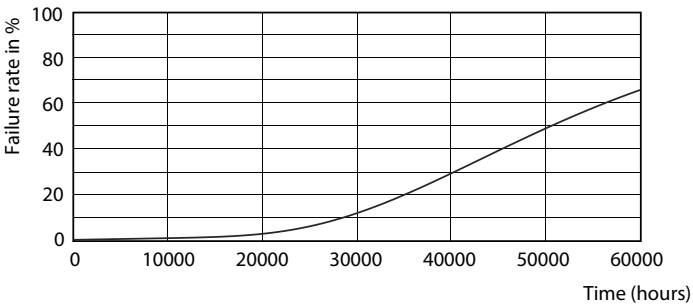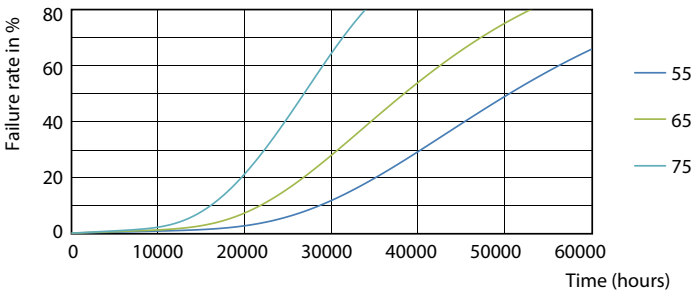


Mains DLC 17W 2000-2100lm 3000_5000K ND

Mains DLC 17W 2000-2100lm 3000_5000K ND

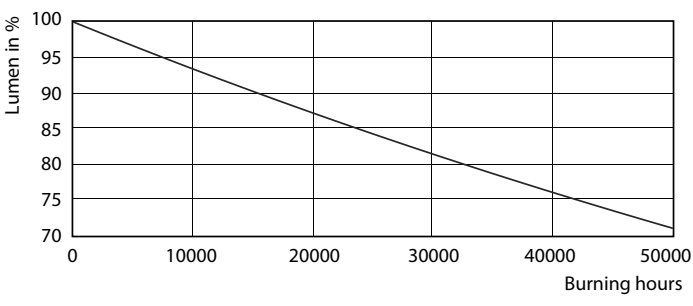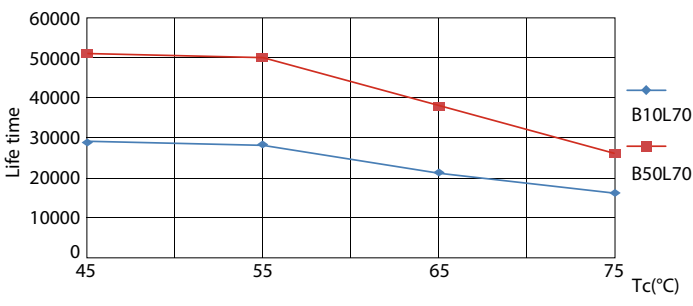

Mains DLC 17W 2000-2100lm 3000_5000K ND

Mains DLC 17W 2000-2100lm 3000 5000K ND

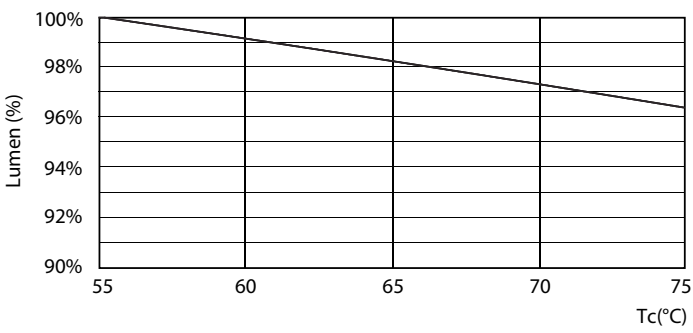

Mains DLC 17W 2000-2100lm 3000 5000K ND

CorePro LEDtube InstantFit T8

