



SWITCHES

Pushbutton Switches

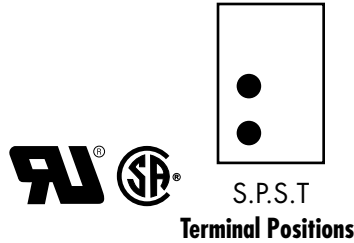

CAT. NO.	CIRCUIT FUNC.	POLES & THROWS	RATINGS			ACTUATOR STYLE	ACTUATOR MATERIAL	CONTACT	CONN. TYPE	STD. CTN. QTY.
			AMPS 125VAC	AMPS 250VAC	HP 125-250VAC					
76050PS	PUSH-ON, PUSH-OFF	SPST	6*	3*	—	Pushbutton	Brass/Nickel	Maintained	Screws	5
76040PW	PUSH ON, PUSH OFF	SPST	6	3	1/3 @125	Pushbutton	Brass/Nickel	Maintained	Wire Leads	5
Dimensions (IN) A: 0.437 B: 0.562 C: 0.542 D: 1.183										



CAT. NO.	CIRCUIT FUNC.	POLES & THROWS	RATINGS			ACTUATOR STYLE	ACTUATOR MATERIAL	CONTACT	CONN. TYPE	STD. CTN. QTY.
			AMPS 125VAC	AMPS 250VAC	HP 125-250VAC					
76010PW	PUSH ON, PUSH OFF	SPST	10	5	1/4 @125	Pushbutton	Nylon	Maintained	Wire Leads	5
Dimensions (IN) A: 1.003 B: 0.612 C: 0.550 D: 0.993										