
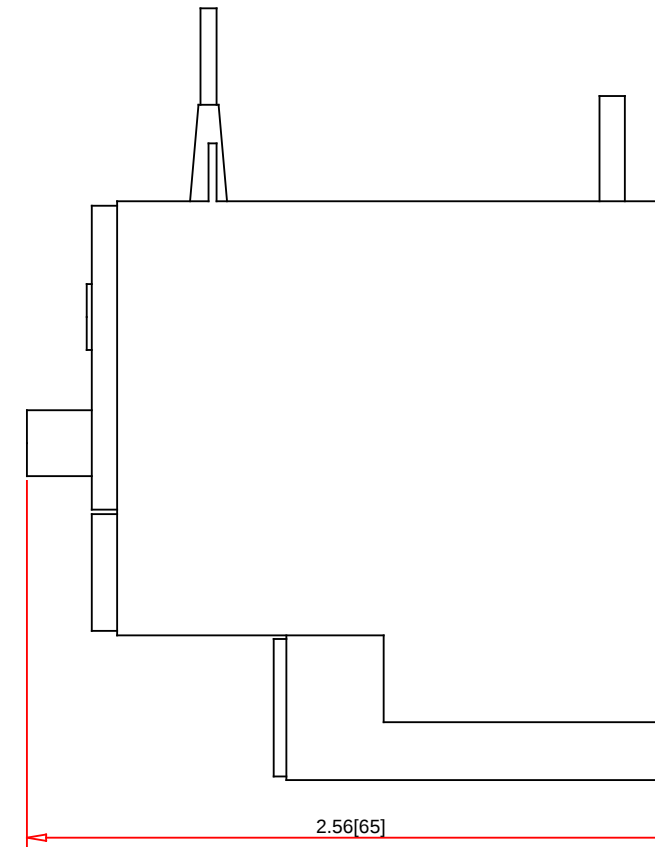


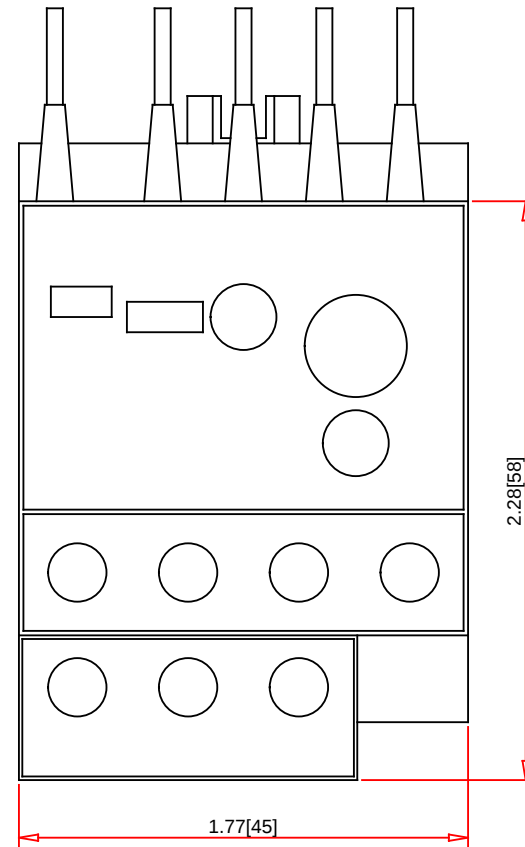


Note:

- Drawings Not To Scale
- Drawings Subject to Change Without Notice
- Dimensions are inches next to [Millimeters]

Part No.:

LR2K0310

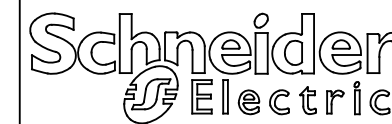

Schneider Electric United States
North American Division
Boston One Campus
800 Federal Street
Andover, MA 01810, USA
Phone: +1 877 342 5173
Email: CCC@us.schneider-electric.com

Technical Information:

Termination Method: Screw Clamp
UL File/CCN: E164353 / NKCR
CSA File: LR43364 3211 03
Meets Standard: IEC 60947
CE: Yes
RoHS: Yes
Weight: 0.35 lb (0.13 kg)
Power Wire Size : #12 - #18 AWG
Control Wire Size: #12 - #18 AWG
Power Terminal Torque: 7 lb-in (0.8 Nm)
Control Terminal Torque: #12 - #18 AWG
Mtg. Directly to Contactor: Yes
Mtg. Separate from Contactor: LA7K0064

Specification:

Description: TeSys K IEC Overload Relay
Type: TeSys K IEC Bi-Metallic Overload Relay
Ambient Comp. Bimetallic: Yes
Solid State: n/a
Class 10: Yes
Class 20: n/a
Single Phase Sensitivity: Yes
For Use with Contactors: TeSys K AC or DC IEC Contactor
Current Setting Range: 2.6A to 3.7A