



Powering Business Worldwide

pe.eaton.com

DS7 Soft Start Controller

DS7-340SX041N0-N

UPC:786685856728

Dimensions:

- **Height:** 5.47 IN
- **Length:** 6.34 IN
- **Width:** 3.66 IN

Weight:3.97 LB

Notes:No internal radio interference suppression filters

Warranties:


- Eaton Selling Policy 25-000, one (1) year from the date of installation of the Product or eighteen (18) months from the date of shipment of the Product, whichever occurs first.

Specifications:

- **Bypass:** Internal bypass
- **Circuit Breaker Type:** HFD3150L
- **Fuse Size:** 150A class RK5 max
- **Control Voltage:** 24 Vac/Vdc
- **Environmental Rating:** IP20
- **Frame Size:** Frames 3 and 4
- **Horsepower:** 30 hp
- **Phase:** Three-phase mains supply voltage
- **Rated Operational Current:** 41A
- **Series:** Generation 7
- **Voltage Rating:** 480V

Supporting documents:

- [DS7 Series soft start controller](#)
- [DS7 series soft start controllers, Frame 1 \(4-12A\)](#)
- [Eatons Volume 6-Solid-State Motor Control](#)
- [Eaton Specification Sheet - DS7-340SX041N0-N](#)

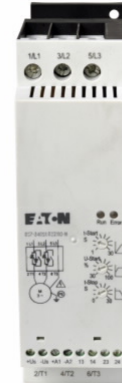

- [Product Datasheet - DS7-340SX041N0-N](#)

Certifications:

- IEC 60947-4-2
- EN 60947-4-2
- UL Listed
- CSA Certified

Product compliance:

- CE Marked
- C-Tick Compliant