

GROUNDING

Grounding Connectors


Heavy Duty for Parallel

UC Series



FEATURES

- Made of high-copper-content alloy for grounding to 1/2" - 1" ground rods and ground pipes from 1/4" - 3 1/2" in parallel or 90° position.
- Suitable for direct burial in earth and concrete.
- Nuts and lockwashers are silicon bronze.
- 200 Series for use with two wires and 300 Series for use with three wires.

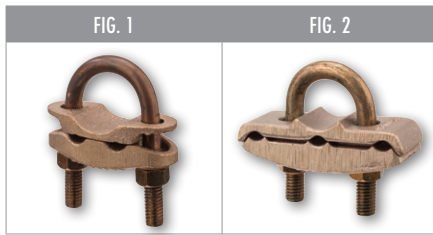

CAT. NO.	FIG. NO.	CERTIFICATION	PIPE SIZE (IPS) (IN.)	CABLE RANGE (IN.)	STD. CTN. QTY.
UC-214	1	UL	1	2/0 - 4	6
UC-215	1	UL	1	250 - 2/0	6
UC-221	1	UL	1 1/4	250 - 2/0	6
UC-226	1	UL	1 1/2	2/0 - 4	6
UC-227	1	UL	1 1/2	250 - 2/0	6
UC-232	1	UL	2	2/0 - 4	6
UC-233	1	UL	2	250 - 2/0	3
UC-237	1	UL	2 1/2	2/0 - 4	3
UC-238	1	UL	2 1/2	250 - 2/0	3
UC-242	1	UL	3	2/0 - 4	3
UC-243	1	UL	3	250 - 2/0	3
UC-315	2	UL	1	250 - 2/0	6
UC-320	2	UL	1 1/4	2/0 - 4	6
UC-326	2	UL	1 1/2	2/0 - 4	6
UC-327	2	UL	1 1/2	250 - 2/0	6
UC-332	2	UL	2	2/0 - 4	6
UC-338	2	UL	2 1/2	250 - 2/0	3
UC-342	2	UL	3	2/0 - 4	3
UC-343	2	UL	3	250 - 2/0	3



Scan QR code
for mobile access to
Grounding drawings.