


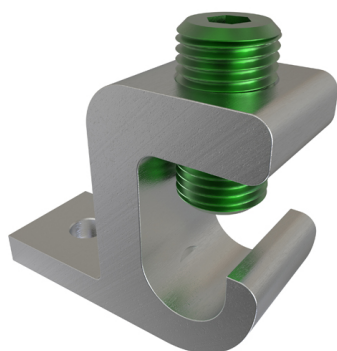

SKU: GBL-250

UPC: 0783669960150

Features & Benefits:

Description: Aluminum Lay-in Ground Lug, Dual Rated, Conductor Range 250-6, Tin Plated

Specs

Additional Class Attributes

Connection	Mechanical
Mounting Kit Hardware Part #	GBL-MH3
Number of Conductors	1
Number of Mounting Holes	1
Number of Ports / Wireways	1
Wire Orientation	NA

Dimensions

Dimension G (IN)	0.45
Drive Size Main	7/32
Drive Type Main	Internal Hex
Height (IN)	1.72
Height BX (IN)	3.625
Height (mm)	43.688
Length (IN)	2.18
Length (mm)	55.372
Tang Thickness (IN)	0.25
Weight (LB)	0.2
Weight BX (LB)	6.504
Width (IN)	0.88
Width BX (IN)	6.375
Width (mm)	22.352

Material and Finish

Conductor Material	Copper
Connector Finish	Tin
Material	Aluminum
Wire Binding Hardware Finish	Nickel Strick, Zinc, Green Dye
Wire Binding Hardware Material	Stainless steel

Additional Technical Specifications

Conductor Type	Solid
----------------	-------

General

Bag Quantity	1
Carton Quantity Description	STD PACK QTY 25
Direct Burial	No
Dual Rated	Yes
NEMA Code	S-588-3
UPC Code	78366996015

Bolt and Screw Sizes

Mounting Bolt/Stud Size	1/4
Wire Binding Torque	6 AWG = 75

Conductor Ranges

Conductor Range CU Solid (Primary, run, main, line)	NA
Conductor Range CU Stranded (Primary, run, main, line)	250 kcmil - 6 Str

Testing Standards

Prop65 Compliance	WARNING: Cancer and Reproductive Harm - www.P65warnings.ca.gov
UL Control Number	NA
UL / CULUS Specification	UL 467 Listed
UL File Number	E34440