




ECFUF-124

By Killark
Catalog # ECFUF-124

1/2" Flexible Coupling with 24" Bend Length, Bronze.

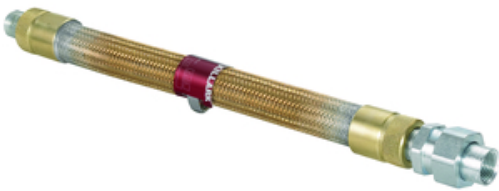

*Representative Image

Features

- Bronze flexible metal construction
- An inner liner of asphaltum impregnated jute fibre tubing to protect conductors
- Provided with one zinc plated steel nipple and one zinc plated steel female union
- Special lengths available – consult factory

Application

For use in hazardous areas where movement or vibration requires a flexible connection or a difficult bend is required in a conduit system.

General

Color	• Bronze • Bronze
Finish Type	Naturel
Material	Bronze
Series	ECFUF
Type	• Flexible Coupling With Female Union • Flexible Coupling With Female Union
UPC	783936105680

Dimensions

Dimensions	30.125 in x 1.5 in x 1.5 in
Gross Weight with Packaging	3.5
Height	1.5 in
Hub Size	1/2"
Length	30.125 in
Width	1.5 in

Certifications and Compliance

CSA File Number	LR11716
Hazardous Rating(s)	• Class I, Divisions 1 & 2, Groups A, B, C, D • Class I, Zones 1 & 2, Groups IIC, IIB, IIA • Class II, Divisions 1 & 2, Groups E, F, G • Class III, Divisions 1 & 2
UL File Number	E10514

Product Assets

[Catalogs - Killark Catalog](#)
[Certifications - ECF/EKJ Flexible Couplings CSA Certification](#)
[Customer Notices - Prop 65 Notice](#)
[Installation Manuals - ECF & EKJ Series IOM K1480](#)



A proud member of the Hubbell Family.