



Flex
Downlights



Lumination® Flex Downlight provides the right general illumination solutions for both commercial and light commercial spaces including higher ceilings at an affordable price

Features

- Canless Downlight
- 4, 6, and 8" Round Apertures
- Selectable Lumens up to 4600 lm
- Selectable CCT (2700K/3000K/3500K/4000K/5000K)
- Universal Voltage (120-277V)
- All-in-One, Mutli-Dim: 0-10V Dimming to 1% and 120V Phase (ELV/Triac) to 5%



Flex LRXR

Flex Your Way to Budget-Friendly Solutions



Stretch Your Dollars

The install from below design can be used for new construction, as well as remodel and retrofit applications making it simple to order and easy to install.

	4"	6"	8"
Low	750	1100	3000
Mid	1100	1500	4000
High	1500	2500	4600

15 Lumen/CCT configurations in 1 SKU

90 CRI, Standard

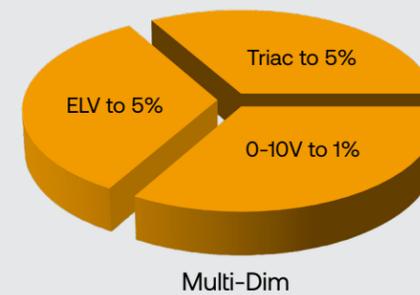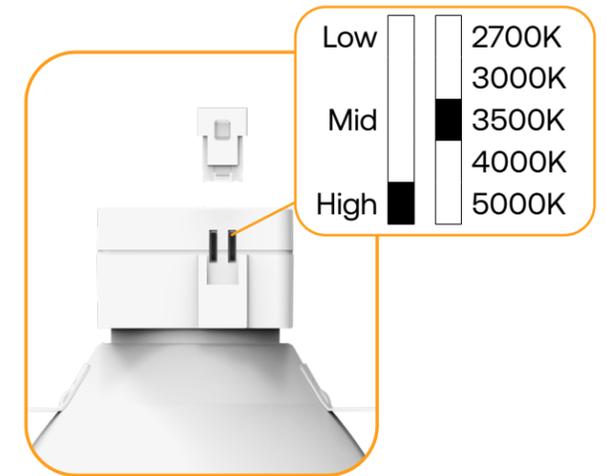


All-in-One Dimming

All Flex downlights have universal 120-277V voltage and multiple dimming protocols, making it easy to satisfy a wide variety of requirements with the same fixture.

Strengthen with Add-ons

Add optional accessory kits for even more versatility including an emergency battery backup kit and frame kits with J-Box and bar hangers.

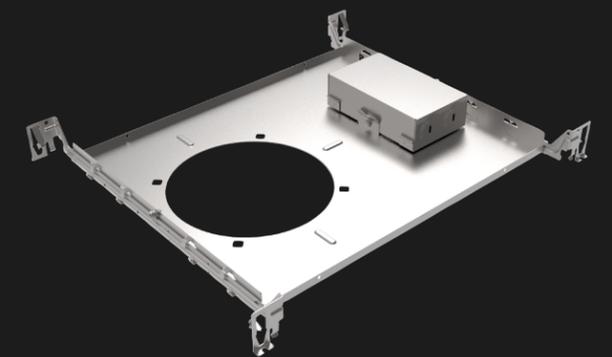

Ready to ship
Learn More





ALBEO

DAINTREE WIRELESS CONTROLS

EVOLVE

FORUM

GE LAMPS

GTX

IMMERSION

LIGHTGRID

LIGHTSWEEP

LUMINATION

TETRA



Current - GLI Brands

25825 Science Park STE 400
Beachwood, OH 44122-7392

LED.com/Lumination

© 2024 Current Lighting Solutions, LLC. All rights reserved. GE and the GE monogram are trademarks of the General Electric Company and are used under license. Information and specifications subject to change without notice. All values are design or typical values when measured under laboratory conditions.

(Rev 02/05/24)

LUM_LRX_Brochure_R01