


Metallics

An **AMERICAN** Source For Premier
and Innovative Fasteners and Anchors


MADE IN USA




U-BOLTS ONLY!

U – BOLTS (WITH HEX NUTS) – GALVANIZED STEEL

The following Specification Sheet applies to all **U-Bolts (with hex nuts) – Galvanized Steel** in our **UBG series**.



A Diameter	B Inside Length	C Inside Width	D Thread Length	Pipe Size	Tolerance
5/16-18	2-3/16	1	1-3/8	1/2	.039
5/16-18	3-11/16	2	1	1-1/2	.059
5/16-18	3-3/16	2-1/2	1	2	.059
3/8-16	2-1/2	1-1/2	1-1/4	1	.059
3/8-16	2-5/8	2	1-1/4	1-1/2	.059
3/8-16	3-1/8	2-1/2	1-1/4	2	.059
3/8-16	3-5/8	3	1-1/4	2-1/2	.059

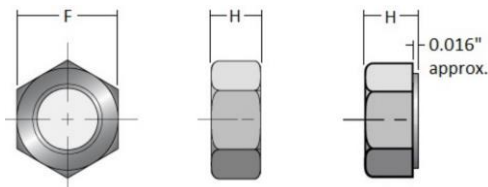

Nominal Size	F		H	
	Width Across Flats		Thickness	
	Max.	Min.	Max.	Min.
5/16	.500	.489	.273	.258
3/8	.563	.551	.337	.320


Metallics

229 Cross Street
Bristol, CT 06010

www.metallics.us

Phone: 860 589-4186 Toll Free: 800 243-8272


Fax: 860 584-1008 Toll Free Fax: 800 831-9358

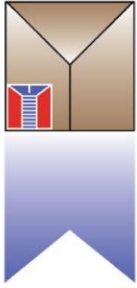

Metallics

An **AMERICAN** Source For Premier
and Innovative Fasteners and Anchors

MADE IN USA

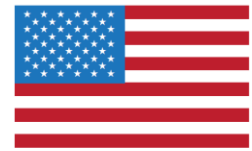

U-BOLTS ONLY!

U-Bolt

- Dimensions: See Table Above
- Material: Low Carbon Steel meeting minimum
Mechanical requirements of ASTM A307A
- Thread Requirements: ASME B1.1, UNC, Class 1A (before galvanizing)

Hex Nut

- Dimensions: ASME B18.2.2 for 1/4" thru 1 1/2"
- Material &
- Mechanical Properties: Grade A per ASTM A563 for 1/4" to 1 1/2"
- Thread Requirements: Thread dimensions and oversize tapping allowance
per ASTM A563

Metallics

229 Cross Street
Bristol, CT 06010

www.metallics.us

Phone: 860 589-4186 Toll Free: 800 243-8272

Fax: 860 584-1008 Toll Free Fax: 800 831-9358