



Catalog Number 11834
UPC Number 60198611834
Description Nylon Insulated Pin Terminal
 16-14 AWG



Features


- Manufactured from high strength copper alloy
- Electro-tin plated for corrosion resistance
- Expanded insulation eliminates strand "Hang Up", provides strain relief & excellent High Temp, UV & chemical resistance
- Wire range stamped on the surface for easy interpretation
- Brazed seam prevents splitting under maximum pressure
- Serrated barrel provides excellent contact & mechanical pull-out force resistance characteristics
- Excellent for terminal block applications

General

Insulation Type Nylon
Material Copper Tubular/Copper Plate
Finish Electro-Tin Plated
Color Blue
Wire Range 16-14
Stud Size N/A

Dimension Information

L Inches (mm) 0.898
D Inches (mm) 0.177
D1 Inches (mm) 0.091
E Inches (mm) 0.433
F Inches (mm) 0.472
W Inches (mm) 0.075
T Inches (mm) 0.031



Specifications

Temperature Rating 105°C
Voltage Rating 600 V
Flammability Rating UL 94 V-0
Amp Rating 14 AWG 30 Amps
 16 AWG 18 Amps

Packaging

Bag Qty 100
Master Bag Qty 1000

Certifications




UL Yes
cUL Yes
RoHS Yes

Morris Products 53 Carey Road, Queensbury, NY 12804

www.morrisproducts.com



REV	DESCRIPTION	DATE
A	RDK-97127	2008/11/24
B	RDK-98020	2009/06/11
C	RDC-98308	2009/06/11

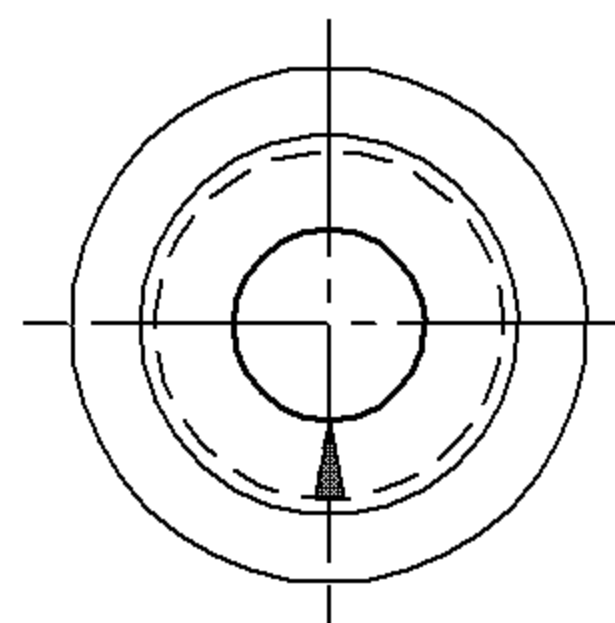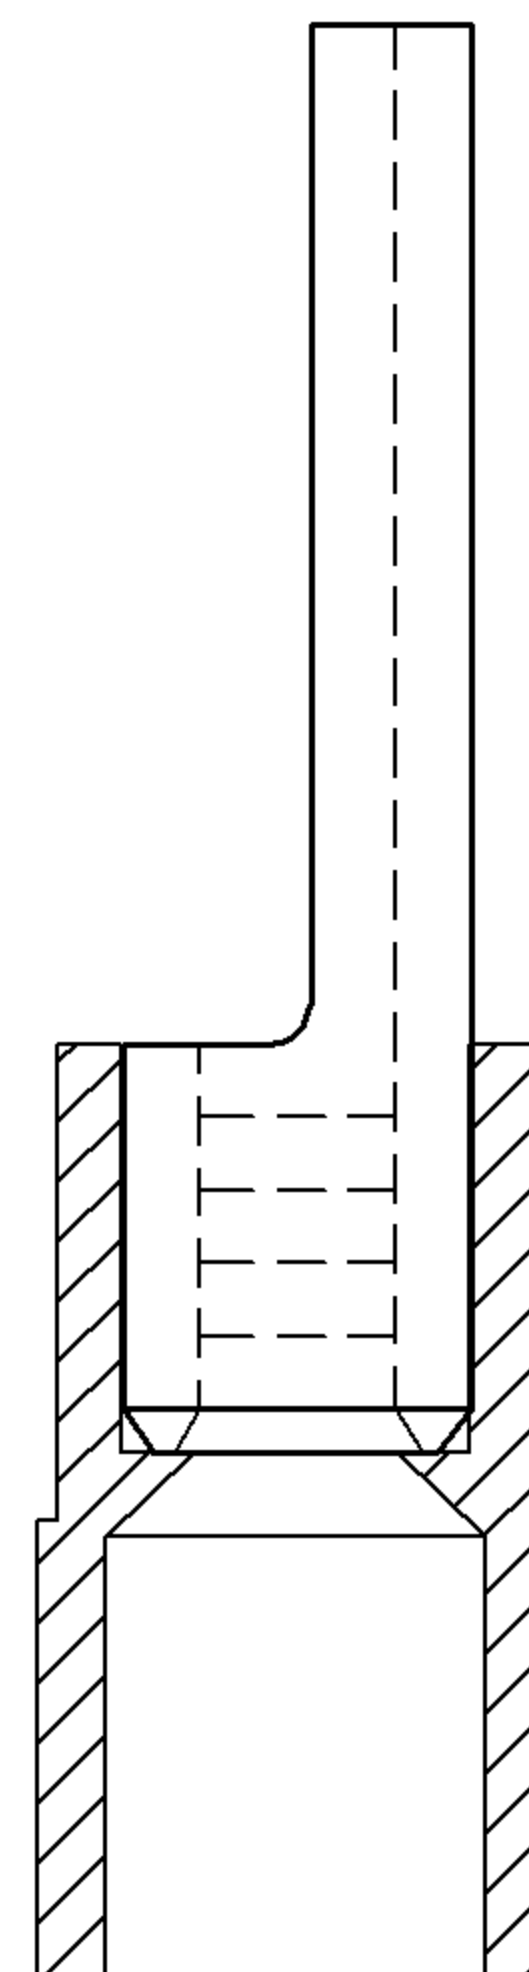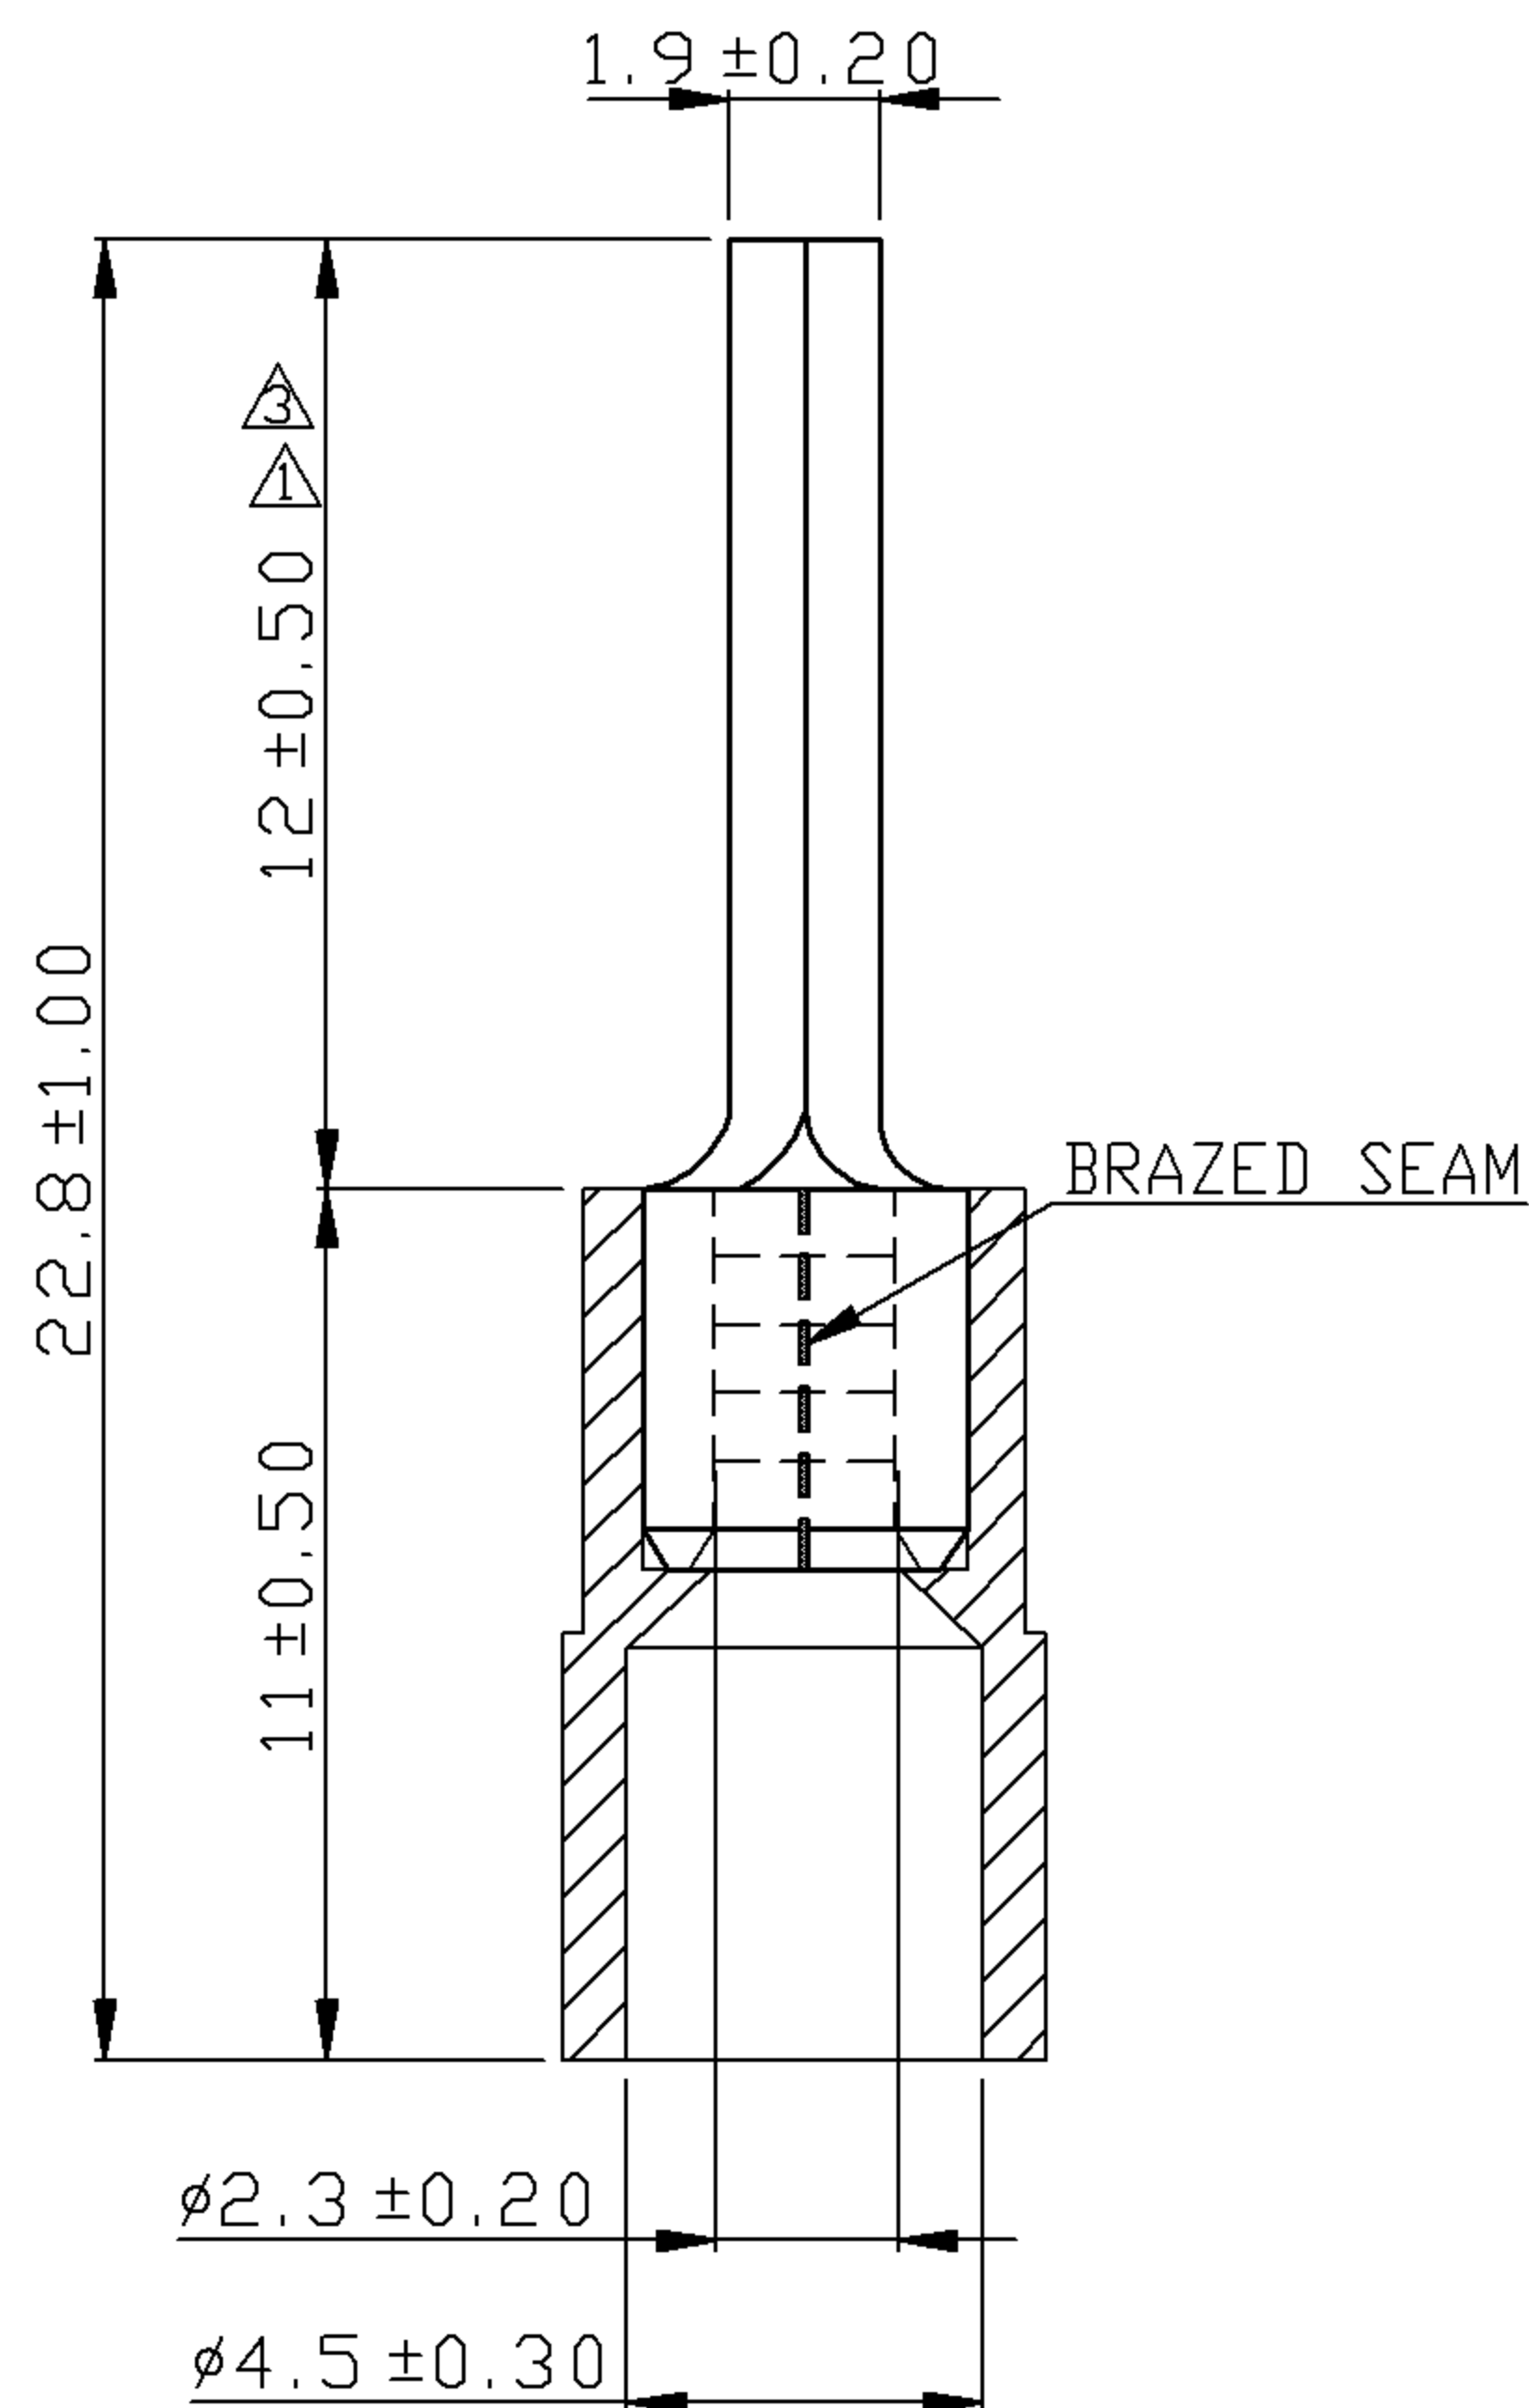

NOTE:

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	16	14
AMP.	18	30
2. MAXIMUM ELECTRICAL RATING : 105°C 600 VOLTS MAX.
3. INSULATION MATERIAL : NYLON
4. INSULATION COLOR : BLUE
5. TERMINAL MATERIAL : COPPER
6. WIRE RANGE : 16-14 A.W.G.(1.5-2.5 mm²)
7. TERMINALS SURFACE TREATMENT : TIN PLATED
8. TERMINALS THICKNESS : 0.80 mm

Tolerance Unless Otherwise Specified	
0 > mm ±	ANGLE
> mm ±	0° > ° REF ±
> mm ±	° > ° ±
> mm ±	° > ° ±

NAME	NYLON-INSULATED PIN TERMINALS				UNIT	
PART NO.	11834	MATERIAL	-----		APPROVE	
NUMBER		SCALE	SHEET	PAGE	CHECKED	
DATE	2006/08/09	4/1	1-3	10F1	DRAWN	

Morris Products Inc.
53 Carey Rd. Queensbury, NY 12804