


Plastic Cable Clamps

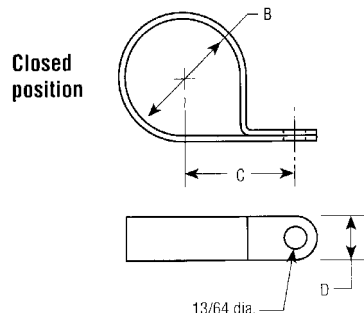


- Secure cable, tubing, wires, fiber optics, etc.
- Used for construction, maintenance & assembly line operations
- Use in control cabinets, panels and general applications
- Molded in the open position for easy assembly
- Tough, durable, yet extremely lightweight
- Operating Temperature Range:
-66°F to 340°F (19°C to 171°C)
- Clean, smooth edges prevent abrasion & facilitate easy handling
- Use with #10 screw (.18") (not included)
- Made from UL approved Nylon 6/6, 94V-2

Dimensions = Inches

Cat. No.	Closed Position B	C	Width D	Screw Hole	Bag Qty
Natural Color					
22412	1/8"	.37	.38	.18	10
22414	3/16"	.41	.38	.18	10
22416	1/4"	.39	.39	.18	10
22418	3/8"	.49	.47	.18	10
22420	1/2"	.60	.47	.18	10
22422	5/8"	.72	.47	.18	10
22424	3/4"	.72	.47	.18	10
22426	1"	.87	.47	.18	10
22428	1 1/4"	1.03	.47	.18	10
22430	1 1/2"	1.18	.47	.18	10
Ultraviolet Black					
22442	1/8"	.37	.38	.18	10
22444	3/16"	.41	.38	.18	10
22446	1/4"	.39	.39	.18	10
22448	3/8"	.49	.47	.18	10
22450	1/2"	.60	.47	.18	10
22452	5/8"	.72	.47	.18	10
22454	3/4"	.72	.47	.18	10
22456	1"	.87	.47	.18	10
22458	1 1/4"	1.03	.47	.18	10
22460	1 1/2"	1.18	.47	.18	10

Grommet Edging

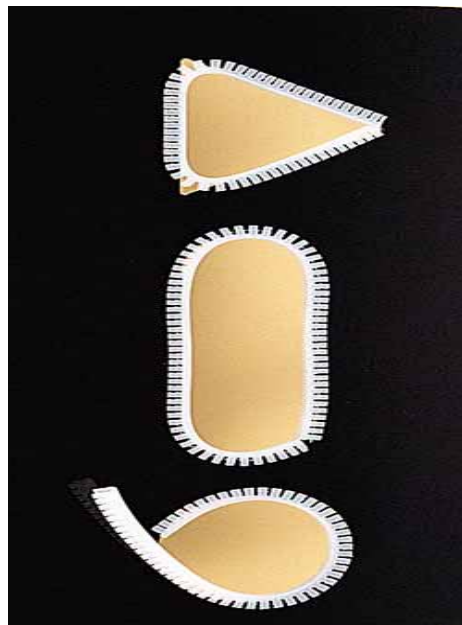

- Cut to fit any hole size for cord, wire, or cable protection against damage from sharp edges
- Use product on irregularly shaped and round holes
- Packaged on paper spool for easy storage
- Material: Polyethylene

Dimensions = Inches

Cat. No.	Teeth Spacing	Panel Thickness	Bag Qty
22200	.031"	Under .003"	33Ft.
22201	.039"	.003" - .039"	33Ft.
22202	.047"	.039" - .047"	33Ft.
22203	.063"	.047" - .063"	33Ft.
22204	.079"	.063" - .079"	33Ft.
22205	.094"	.079" - .094"	33Ft.
22206	.126"	.094" - .126"	33Ft.
22207	.177"	.126" - .177"	33Ft.