

Rigid Metal Conduit, IMC or EMT Pipe Hangers

CEC:
Listed for Ordinary Locations

Applications

- For securing Rigid Conduit, IMC, EMT and Flexible Metal Conduit.

Standard Materials


- Malleable iron
- Steel bolt

Standard Finishes

- Mechanically galvanized

CEC Certifications and Compliances

- CSA Standard: C22.2 No. 18.3
- CSA Certified: 009795

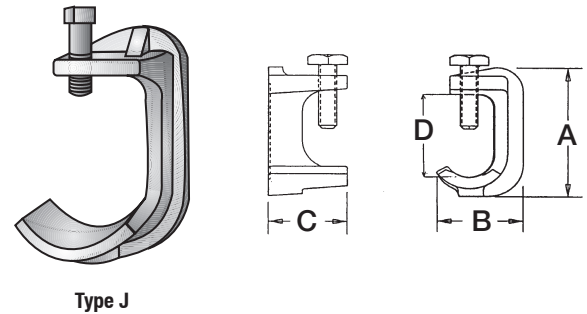

Trade Size (Inches)	Dimensions in Millimeters (Inches)				Bolt Size	Catalog Number
	A	B	C	D		
1/2	65.02 (2.56)	39.62 (1.56)	35.05 (1.38)	41.40 (1.63)	7.9 x 38.1 (0.31 x 1.5)	J-50G
3/4	73.15 (2.88)	47.75 (1.88)	35.81 (1.41)	49.28 (1.94)	7.9 x 38.1 (0.31 x 1.5)	J-75G
1	88.90 (3.50)	55.63 (2.19)	44.45 (1.75)	57.15 (2.25)	7.9 x 38.1 (0.31 x 1.5)	J-100G
1-1/4	95.25 (3.75)	63.50 (2.50)	44.45 (1.75)	65.02 (2.56)	9.7 x 38.1 (0.38 x 1.5)	J-125G
1-1/2	103.12 (4.06)	73.15 (2.88)	50.80 (2.00)	71.37 (2.81)	9.7 x 38.1 (0.38 x 1.5)	J-150G
2	127.00 (5.00)	84.07 (3.31)	52.32 (2.06)	87.38 (3.44)	12.7 x 44.5 (0.5 x 1.75)	J-200G
2-1/2 -3	160.27 (6.31)	112.78 (4.44)	66.80 (2.63)	115.82 (4.56)	16.0 x 63.5 (0.63 x 2.5)	J-2530G

Rigid Metal Conduit, IMC or EMT Pipe Hangers

NEC/CEC:
Rated for Ordinary Locations

Applications

- For securing Rigid Conduit, IMC, and EMT. Swivel grip rotates a full 360°.

Standard Materials


- Malleable iron
- Steel bolt

Standard Finishes

- Zinc plated

Options

- Mechanically galvanized. Contact your local representative for pricing, availability and minimum order quantities.

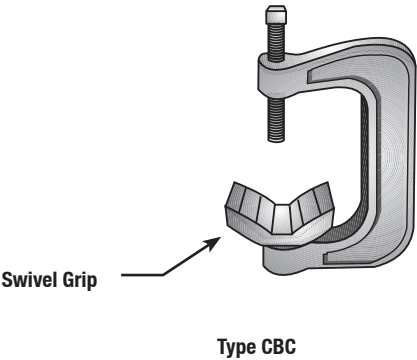

Trade Size (Inches)	Dimensions in Millimeters (Inches)		Catalog Number
	Length	Width	
1/2 - 3/4 - 1 - 1-1/4	85.85 (3.38)	65.02 (2.56)	CBC-1 ①
1-1/4 - 1-1/2 - 2	117.6 (4.63)	82.55 (3.25)	CBC-2 ②

① CBC-1 maximum beam thickness of 1/4" when using 1-1/4" conduit.
② CBC-2 maximum beam thickness of 1/8" when using 2" conduit.