

PB and PBW Pull Box Fittings

For Rigid Metal Conduit and IMC.

NEC:
Listed for Ordinary Locations

Applications

- Fittings consist of two malleable iron end units one of which is furnished with set screws and a set of sealing rings consisting of packing, copper ground and pressure ring.
- A special Type A insulating bushing is also included. (Conduit not included.)

Features

- Two end units fitted to a purchased oversize sleeve make a convenient pull box to provide intermediate pulling points in a rigid metal conduit system to meet NEC Section 314.28(A)(1).
- Available for EMT. Contact your local representative for pricing and availability.

Standard Materials





- End units - malleable iron or ductile iron
- Sleeves - steel: sleeves must be ordered separately at an additional cost.

Standard Finishes

- Hot Dip Galvanized

NEC Certifications and Compliances

- UL Standard: ANSI/UL 514B
- UL Listed: E-11853

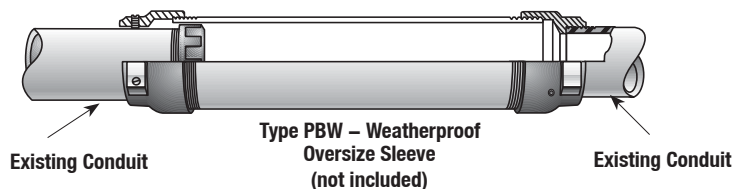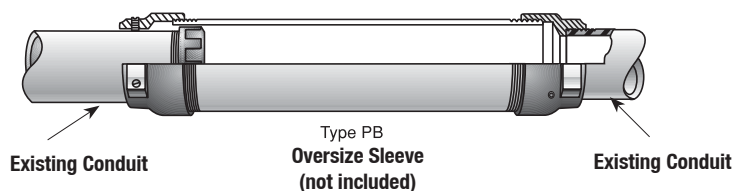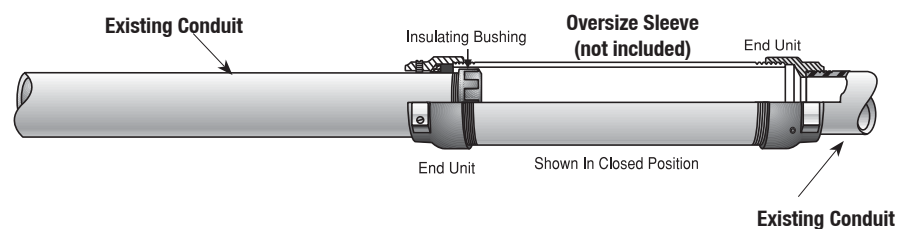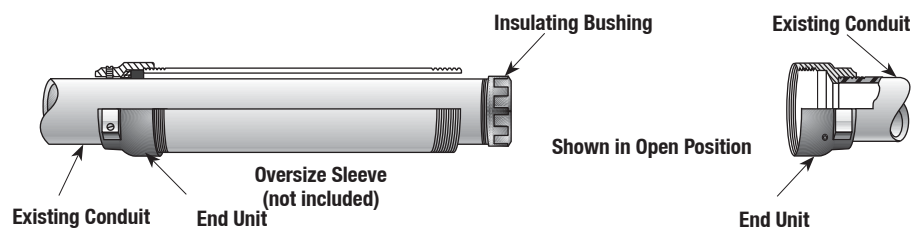

NOTE: PB and PBW Pull Box Fittings are not supplied with oversize sleeves. Please order sleeves from the table on next page.

PB and PBW Pull Box Fittings

NEC:
Listed for Ordinary Locations

Type PB, PBW, End Fittings (see table below for ordering oversize sleeves)

| Trade Size (Inches) | Oversize Sleeve Required Trade Size | Dimensions in Millimeters (Inches) | | | Non-Weatherproof Catalog Number | Weatherproof Catalog Number |
|------------------------|--|------------------------------------|---------------------|----------------------------------|------------------------------------|--------------------------------|
| | | Max. Dia. | Length Fitting Only | Min. Required Sleeve Length ① | | |
| 1/2 | 25.40 (1.00) | 44.45 (1.75) | 47.75 (1.88) | 152.40 (6.00) | PB-50 | PBW-50 |
| 3/4 | 31.75 (1.25) | 54.10 (2.13) | 50.80 (2.00) | 203.20 (8.00) | PB-75 | PBW-75 |
| 1 | 38.10 (1.50) | 60.45 (2.38) | 57.15 (2.25) | 304.80 (12.00) | PB-100 | PBW-100 |
| 1-1/4 | 50.80 (2.00) | 73.15 (2.88) | 60.45 (2.38) | 355.60 (14.00) | PB-125 | PBW-125 |
| 1-1/2 | 63.50 (2.50) | 101.60 (4.00) | 69.85 (2.75) | 508.00 (20.00) | PB-150 | PBW-150 |
| 2 | 76.20 (3.00) | 101.60 (4.00) | 69.85 (2.75) | 508.00 (20.00) | PB-200 | PBW-200 |
| 2-1/2 | 88.90 (3.50) | 117.60 (4.63) | 79.50 (3.13) | 609.60 (24.00) | PB-250 | PBW-250 |
| 3 | 101.60 (4.00) | 128.52 (5.06) | 79.50 (3.13) | 711.20 (28.00) | PB-300 | PBW-300 |
| 3-1/2 | 114.30 (4.50) | 146.05 (5.75) | 79.50 (3.13) | 812.80 (32.00) | PB-350 | PBW-350 |
| 4 | 127.00 (5.00) | 157.23 (6.19) | 79.50 (3.13) | 914.40 (36.00) | PB-400 | PBW-400 |
| 5 | 177.80 (7.00) | 212.85 (8.38) | 104.90 (4.13) | 1117.60 (44.00) | PB-500 | PBW-500 |
| 6 | 203.20 (8.00) | 241.30 (9.50) | 104.90 (4.13) | 1320.80 (52.00) | PB-600 | PBW-600 |

Oversize Sleeves (steel)

| Trade Size (Inches) Sleeve | Dimensions in Millimeters (Inches) | | | | | | |
|----------------------------------|------------------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|--------------------------|
| | 12" Catalog Number | 18" Catalog Number | 24" Catalog Number | 30" Catalog Number | 36" Catalog Number | 48" Catalog Number | 60" Catalog Number |
| 1 | PBS-100-12S | PBS-100-18S | — | — | — | — | — |
| 1-1/4 | PBS-125-12S | PBS-125-18S | — | — | — | — | — |
| 1-1/2 | PBS-150-12S | PBS-150-18S | PBS-150-24S | — | — | — | — |
| 2 | PBS-200-12S | PBS-200-18S | PBS-200-24S | — | — | — | — |
| 2-1/2 | PBS-250-12S | PBS-250-18S | PBS-250-24S | PBS-250-30S | PBS-250-36S | — | — |
| 3 | PBS-300-12S | PBS-300-18S | PBS-300-24S | PBS-300-30S | PBS-300-36S | — | — |
| 3-1/2 | PBS-350-12S | PBS-350-18S | PBS-350-24S | PBS-350-30S | PBS-350-36S | PBS-350-48S | PBS-350-60S |
| 4 | PBS-400-12S | PBS-400-18S | PBS-400-24S | PBS-400-30S | PBS-400-36S | PBS-400-48S | PBS-400-60S |
| 4-1/2 | PBS-450-12S | PBS-450-18S | PBS-450-24S | PBS-450-30S | PBS-450-36S | PBS-450-48S | PBS-450-60S |
| 5 | PBS-500-12S | PBS-500-18S | PBS-500-24S | PBS-500-30S | PBS-500-36S | PBS-500-48S | PBS-500-60S |
| 6 | PBS-600-12S | PBS-600-18S | PBS-600-24S | PBS-600-30S | PBS-600-36S | PBS-600-48S | PBS-600-60S |
| 7 | PBS-700-12S | PBS-700-18S | PBS-700-24S | PBS-700-30S | PBS-700-36S | PBS-700-48S | PBS-700-60S |
| 8 | PBS-800-12S | PBS-800-18S | PBS-800-24S | PBS-800-30S | PBS-800-36S | PBS-800-48S | PBS-800-60S |

① Minimum length of sleeve required to meet NEC Section 314.28(A)(1).

NOTE: PB and PBW Pull Box Fittings are not supplied with oversize sleeves. Please order sleeves from the table above.