

360° Swivel Conduit Unions

Type UNA

Female/Female

Type UNAM

Male/Female

Use:

- Allows conduit to be joined at any angle.

Features:

- Threaded for Rigid Conduit or IMC
- Tapered Threads (NPT)

Material/Finish:

Gray Iron/Zinc Electroplated

Third Party Certification:



UL Listed: E-34997
Class I, Div. 1, 2, Groups C, D
Class I, Zone 1, 2, Groups IIA, IIB
Class II, Div. 1, 2, Groups E, F, G
Class III




CSA Certified: 009795

Applicable Third Party Standards:


UL Standard: 886
NEC Articles 500-503 & 505
CSA Standard: C22.2 No. 30

Trade Size (inches)	Catalog Number Female/Female	Dimensions in inches	
		Overall Length	Max. Dia.
1/2	UNA-50	4	1 7/8
3/4	UNA-75	4 1/2	2 1/16
1	UNA-100	5 1/4	2 1/2

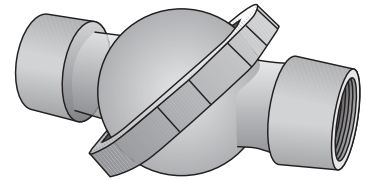

Type UNA
Female/Female

Trade Size (inches)	Catalog Number Male/Female	Dimensions in inches	
		Overall Length	Max. Dia.
1/2	UNAM-50	4 1/2	1 7/8
3/4	UNAM-75	5	2 1/16
1	UNAM-100	5 3/4	2 1/2

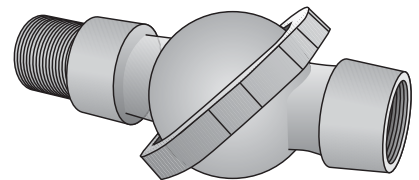

Type UNAM
Male/Female
(Removable Nipple)

Part Number	Trade Size (Inches)	A	B	C	D	E	F	G	H	I
UNA-50	1/2	4	3	3	1 7/8	19/32	2 5/8	1/2-14	2-1/4	5/32
UNA-75	3/4	4 1/2	3 5/16	3 5/16	2 1/16	25/32	2 15/16	3/4-14	2-1/2-12	5/32
UNA-100	1	5 1/4	3 1/2	3 1/2	2 1/2	1	3 1/2	1-11 1/2	3-1/8-12	3/16

