

Project: Type: Prepared By: Date:



#### **Features and Benefits**

Replacement for traditional Metal Halide or High Pressure Sodium HID Lamps

Active Cooling: Internal sensor overheat and engaged will automatically reduce output to 70% rated wattage until the sensor cools and will light up again to 100%

Integral Driver enables lamp to be wired directly to line voltage without need for an external driver or ballast

Rated for use in enclosed and open fixtures in dry or damp locations

4kV surge protection built in

50,000 hour Lifespan

Environmentally friendly, no mercury used

UL Listed, UL Classifed

5 Year No Compromise Warranty

Lamp includes on board low-voltage AUX port for lamp level sensor accessories

Compatible with RAB specified 0-10V dimming system

## **Technical Specifications**

#### Performance

#### **Product Type:**

HID Replacement

## Input Wattage:

100W

#### Wattage Equivalency:

400W HID

#### Lumens:

13,500lm

## Efficacy:

135lm/W

## L70 Lifespan:

50,000 Hours

#### Dimming:

Compatible with RAB specified 0-10V dimming system. Dimming capabilities were tested and verified on Legrand RH4FBL3PTC 0-10V dimming system.

## Construction

#### For Use Outdoors in Open Fixtures:

Yes

## **LED Characteristics**

#### Color Temperature:

4000K Cool White

### Color Accuracy (CRI):

80 CRI

## Installation

## Base Type:

EX39

## Installation Type:

Type B, Ballast Bypass

#### Installation Orientation:

For Vertical Installation Only

## **Electrical**

#### THD:

<20%

### **Power Factor:**

>0.9

## **Operating Temperature:**

-30°C to 60°C

## Input Voltage:

100-277V

## **Operating Frequency:**

50/60Hz

#### Input Current @ 120V:

0.67mA

#### Flicker:

<30%

#### Other

#### Warranty:

RAB warrants that our LED products will be free from defects in materials and workmanship for a period of five (5) years from the date of delivery to the end user, including coverage of light output, color stability, driver performance and fixture finish. RAB's warranty is subject to all terms and conditions found at <a href="mailto:rable-trans-rable-t

# HID-100-EX39-840-BYP-PT-G2



**Bulb Shape:** 

Post Top



## **Technical Specifications (continued)**

## Compliance

**UL Listed:** 

Yes

**UL Classified:** 

Yes

**Certification Model Number:** 

HID-100-EX39-840-BYP-PT

California Energy Commission (CEC) Status:

Lawful for Sales in California

**DLC Listed:** 

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. Designed to meet DLC 5.1 requirements.

DLC Product Code: PLISRZY2JC4G


## **Minimum Compartment Size**

Length x Width x Height [in]	Lamp Quantity	
10	1	

## **Case and Pallet Dimensions**

	QTY	LENGTH (in)	WIDTH (in)	HEIGHT (in)
CASE	6	19.8	14.4	14
PALLET	18	30.8	41.6	47.4

# Wiring Diagram

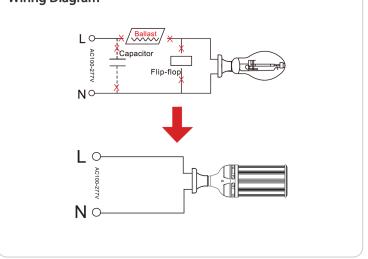

# HID-100-EX39-840-BYP-PT-G2



