

RDLFA-6R12.595CCT120WB



Color: White

Weight: 0.9 lbs

Project:	Type:
Prepared By:	Date:

Driver Info		LED Info	
Type	Constant Current	Watts	12W
120V	0.12A	Color Temp	2700/3000/3500/4000/5000K
208V	N/A	Color Accuracy	90 CRI
240V	N/A	L70 Lifespan	50,000 Hours
277V	N/A	Lumens	1,000 lm
Input Watts	12.5W	Efficacy	80

Technical Specifications

Performance

Description:

Deep regress remote driver downlight looks like a traditional recessed retrofit but without the need of a traditional downlight housing. With the flexibility to choose from 5 field selectable color temperatures 2700K, 3000K, 3500K, 4000K, 5000K and suitable for dry, damp, and wet locations, making them perfect for both indoor and outdoor use.

Product Type:

Recessed Downlights

Input Wattage:

12.5W

Lumens:

1,000lm

Efficacy:

80lm/W

L70 Lifespan:

50,000-Hour LED lifespan based on IES LM-70 results

Compliance

UL Listed:

Suitable for wet locations

Trade Agreements Act Compliant:

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

Electrical

THD:

≤20%


Power Factor:

≥0.9

RDLFA-6R12.595CCT120WB



Dimensions

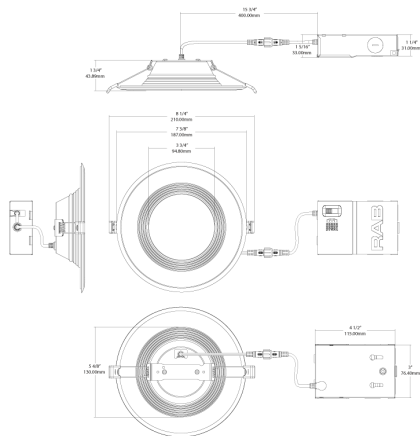

Features

- 5 color temperatures in 1 SKU (2700K, 3000K, 3500K, 4000K, 5000K)
- Back-lit deep regress remote driver downlight
- No recessed housing or j-box required
- Dimmable down to 5% on compatible dimmers, see Dimmer Compatibility List
- IC and airtight rated
- Suitable for indoor and outdoor use in dry, damp, and wet environments

Ordering Matrix

Family	Size	Shape	Wattage	CRI/Color Temp	Driver	Finish	Trim
RDLFA	6	R	12.5	95CCT	120	W	B
4 = 4" R = Round 8 = 8W 95CCT = 90 CRI, CCT Adjustable 120 = 120V W = White B = Baffle							
6 = 6" 12.5 = 12.5W							