



Ultra-economy wall pack with a sleek, contemporary look.

Color: Bronze

Weight: 6.5 lbs

Project:

Type:

Prepared By:

Date:

**Driver Info**

**LED Info**

Type	Constant Current	Watts	86W
120V	0.75A	Color Temp	5000K (Cool)
208V	0.42A	Color Accuracy	84 CRI
240V	0.36A	L70 Lifespan	50,000 Hours
277V	0.34A	Lumens	9,657
Input Watts	89.3W	Efficacy	108.1 lm/W

**Technical Specifications**

**Compliance**

**UL Listed:**

Suitable for wet locations. Suitable for mounting within 4 feet of the ground.

**Electrical**

**Driver:**

Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.75A, 208V: 0.42A, 240V: 0.36A, 277V: 0.34A

**THD:**

2.96% at 120V, 9.33% at 277V

**Power Factor:**

99.7% at 120V, 96.1% at 277V

**Surge Protection:**

2.5kV

**Note:**

All values are typical (tolerance +/- 10%)

**Performance**

**Lifespan:**

50,000-Hour LED lifespan based on IES LM-80 results and TM-21 calculations

**LED Characteristics**

**LEDs:**

Long-life, high-efficacy, surface-mount LEDs

**Color Uniformity:**

RAB's range of Correlated Color Temperature follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

**Construction**

**Cold Weather Starting:**

The minimum starting temperature is -40°C (-40°F)

**Maximum Ambient Temperature:**

Suitable for use in up to 40°C (104°F)

**Mounting:**

Housing contains two (2) conduit entry points, one on each side, and knockout pattern for junction box or direct wall mounting.

**Lens:**

Glass

**Gaskets:**

High-temperature silicone

**Technical Specifications (continued)**

**Construction**

**Green Technology:**

Mercury and UV free. RoHS-compliant components.

**Finish:**

Formulated for high durability and long-lasting color

**Other**

**Replacement:**

Replaces up to 250W Metal Halide

**5 Yr Limited Warranty:**

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at [rablighting.com/warranty](http://rablighting.com/warranty).


**Trade Agreements Act Compliant:**

This product is a product of Cambodia and a "designated country" end product that complies with the Trade Agreements Act

**Buy American Act Compliance:**

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

**Dimensions**

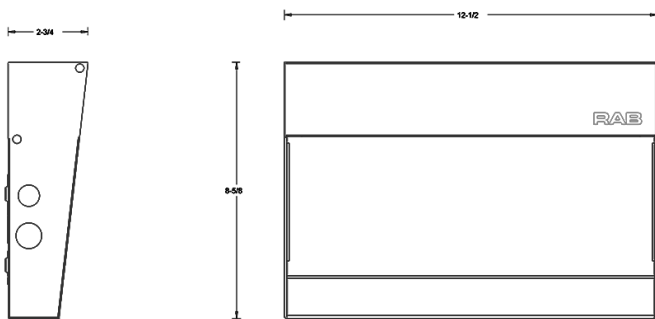

**Features**

- Ultra-economy wall pack with a sleek, contemporary look
- Covers footprint of medium-sized HID wall packs
- Available in various lumen packages

**Ordering Matrix**

Family	Lumen Package	Color Temp	Options
W17	90L		
	30L = Small (2900lm, 30W) 36L = Small (3600lm, 33W) 55L = Medium (5500lm, 50W) 75L = Medium (7500lm, 69W) 90L = Medium (9000lm, 86W) 150L = Large (15000lm, 139W)	Blank = 5000K Cool N = 4000K Neutral Y = 3000K Warm	Blank = No Option /PCU = 120-277V Button Photocell