



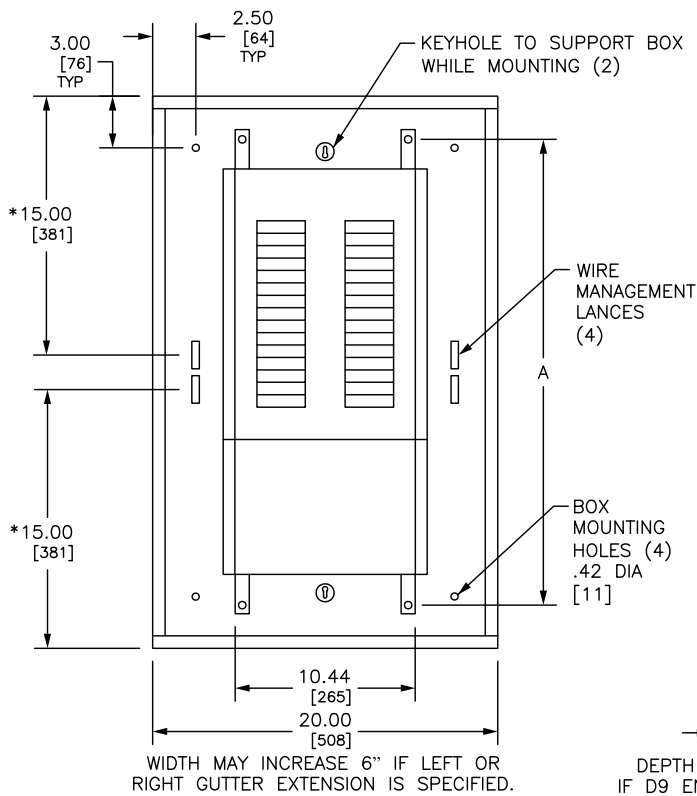

TYPICAL BOX WITH INTERIOR

DEPTH INCREASES TO 8.75" IF D9 ENCLOSURE IS SPECIFIED


TYPICAL BOX SIDE VIEW

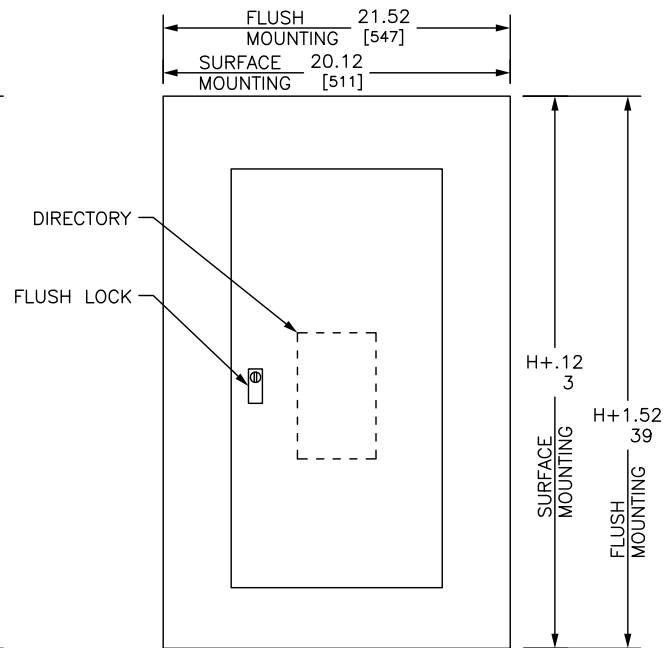

TYPICAL FRONT

TYPICAL MOUNTING OF EDB OR ECB-G3 BREAKERS

*FOR ENCLOSURES WHERE DIMENSION "H" IS 26.00/[660], THIS DIMENSION IS 11.00/[279]

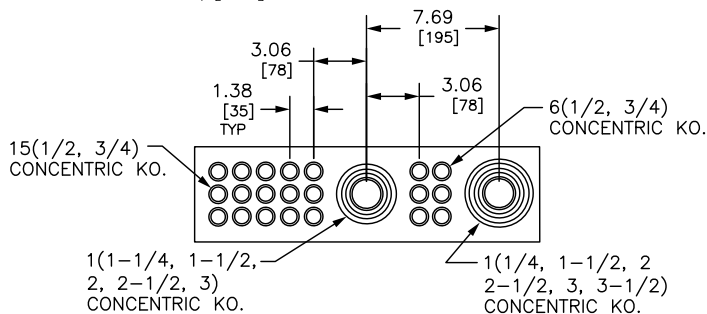

ENDWALL WITH KNOCKOUTS

(ONE ENDWALL OF 20" BOX IS BLANK)
(BOTH ENDWALLS ARE BLANK ON WIDER BOXES)

REFER TO DP CATALOG CLASS 1670 FOR ADDITIONAL INFORMATION
FOR NEMA TYPE 3R APPLICATIONS USE IN CONJUNCTION WITH PBA555
NF PANELBOARDS MEET THE APPLICABLE REQUIREMENTS OF UL AND CSA.

BOX: CODE GAUGE GALVANIZED STEEL. ONE ENDWALL IS BLANK, THE OTHER HAS KNOCKOUTS.

FRONT: MONO-FLAT CONSTRUCTION WITH CONCEALED TRIM SCREWS AND DOOR HINGES. ANSI 49 GRAY BAKED ENAMEL FINISH ELECTRODEPOSITED OVER CLEANED PHOSPHATIZED STEEL.

LOCK: FLUSH LOCK WITH BRUSHED STAINLESS STEEL ESCUTCHEON. NSR-251 KEY.

DUAL DIMENSIONS: INCHES
MILLIMETERS

MAXIMUM MAIN LUG AMPERE RATING	MAXIMUM NUMBER OF CIRCUITS	H		A	
		IN	MM	IN	MM
125	18	26	660	21	533
	30	32	813	27	686
250	30	38	965	33	838
	42	44	1118	39	998
	54	50	1270	45	1143
	66	62	1575	57	1448
125 WITH SUB-THRU LUGS	18	26	660	21	533
	30	32	813	27	686
250 WITH SUB-THRU LUGS	30	38	965	33	838
	42	44	1118	39	998
	54	50	1270	45	1143
	66	62	1575	57	1448
125 WITH FEED-THRU LUGS	18	32	813	27	686
	30	38	965	33	838
250 WITH FEED-THRU LUGS	30	56	1422	51	1295
	42	68	1726	63	1600
	54	62	1575	57	1448
	66	74	1880	69	1753
250 WITH SUB-FEED BREAKERS	30	56	1422	51	1295
	42	62	1575	57	1448
	54	62	1727	63	1600
	66	80	2032	75	1905

IF 125A ALUMINUM COMPRESSION FTL ARE SELECTED, ADD 6" TO H AND A DIMENSIONS.