

Pipe Straps, Conduit Clamps and Hangers


Beam Attachments

M-750 — Side Beam Bracket

Designed for bolt connections.

- Specifications**
- Compliance: A-A-1192A Type 34 and MSS-SP 69 Type 34
 - Material: Malleable Iron (Maximum Temperature 450° F/232° C)
 - Standard Finish — GoldGalv®, Black (add suffix “-B”), Electro-Galvanized (add suffix “-EG”)
 - Ordering: Specify rod size and catalog number.

CAT. NO.	MAX LOAD (LBS.)		WITH BOLT TO STEEL	DIMENSIONS (IN.)				WT. EACH (LBS.)
	ROD SIZE (IN.)	WITH LAG SCREW		C	D	F	G	
M-750-3/8	3/8	390	610	3/8	1 1/16	7/16	7/8	.26
M-750-1/2	1/2	640	1,130	3/4	1 1/8	9/16	1 1/16	.54
M-750-5/8	5/8	760	1,810	7/8	2 1/8	3/4	1 1/16	.94

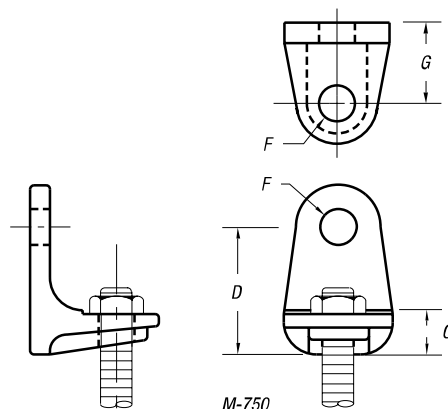


M-762 — Side Beam Connector

Designed for use on buildings of wood construction. They can be secured to the side of beams or joists by means of our Figure 166 Drive Screws (ordered separately).


- Specifications**
- Material: Malleable Iron
 - Standard Finish — GoldGalv®, Black (add suffix “-B”), Electro-Galvanized (add suffix “-EG”)
 - Ordering: Specify size, catalog number and finish.

CAT. NO.	SIZE (IN.)	MAX LOAD (LBS.)	DIMENSIONS (IN.)			WT. EACH (LBS.)
			A	B	C	
M-762-3/8	3/8 rod	250	2 3/8	3/4	3/4	.13
M-762-1/2	1/2 rod	480	2 3/4	3/4	3/4	.25
M-762-1/4	1/4 pipe	250	2 3/4	3/4	3/4	.25

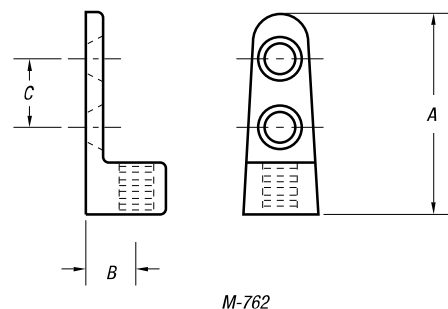

C-747 — Adjustable Beam Attachment

For attachment to timber with coach screws or to the bottom of beams with bolts.



CAT. NO.	ROD SIZE A (IN.)	HOLE SIZE (IN.)	DIMENSIONS (IN.)					STOCK SIZE (IN.)	DESIGN LOAD (LBS.)	STD. CTN.
			B	C	D	E	F			
C-747-3/8B	3/8B	7/16	2 3/4	3 3/8	4 7/8	7/16	2 1/8	1/4 x 1 1/4	610	50
C-747-1/2B	1/2B	9/16	3 3/8	4 3/4	6	9/16	2 5/16	3/8 x 1 1/2	1,130	50
C-747-5/8B	5/8B	1 1/16	3 3/8	4 3/4	6	9/16	2 3/16	3/8 x 1 1/2	1,810	50
C-747-3/4B	3/4B	1 3/16	3 11/16	6 1/4	7 3/4	1 1/16	2 9/16	1/2 x 2	2,710	50
C-747-7/8B	7/8B	1 5/16	3 3/4	6 3/8	8 3/4	1 3/16	2 1/2	1/2 x 2	3,770	50

Standard Finish — Black (B).

Order by Cat. No., rod size.