



2021  
PRODUCT  
GUIDE  
LAMPS & FIXTURES

we know light.™

# TABLE OF CONTENTS

## INDOOR LED LUMINAIRES 2-13

|                                                              |    |
|--------------------------------------------------------------|----|
| LED WATTAGE SELECTABLE DIRECT TROFFER FLAT PANELS .....      | 3  |
| LED DIRECT TROFFER FLAT PANELS .....                         | 3  |
| LUXTERIOR LED WATTAGE SELECTABLE VOLUMETRIC LUMINAIRES ..... | 4  |
| LED HB SERIES LINEAR HIGH BAY LUMINAIRES .....               | 4  |
| LED IB SERIES LINEAR HIGH BAY LUMINAIRES .....               | 5  |
| SMARTSTUFF SMARTBOX LUMINAIRE ACCESSORIES .....              | 5  |
| LED UFO HIGH BAY LUMINAIRES .....                            | 6  |
| LED ROUND HIGH BAY LUMINAIRES, GENERATION 3 .....            | 6  |
| INDUSTRA LED HBM SERIES MODULAR HIGH BAY .....               | 6  |
| LED ROUND HIGH BAY LUMINAIRES, GENERATION 3 .....            | 6  |
| LED VAPOR TIGHT .....                                        | 7  |
| LED WRAP LIGHT .....                                         | 7  |
| LED GENERAL PURPOSE STRIP/ LOW BAY LUMINAIRES .....          | 8  |
| LED GENERAL PURPOSE STRIP RETROFIT KIT .....                 | 8  |
| LED WATTAGE SELECTABLE COMMERCIAL DOWNLIGHTS .....           | 9  |
| LED FLAT SELECTABLE RECESSED DOWNLIGHTS .....                | 10 |
| LED BEVELED SELECTABLE RECESSED DOWNLIGHTS .....             | 10 |
| LED COLOR SELECTABLE SNAP-IN DOWNLIGHTS .....                | 10 |
| LED COLOR SELECTABLE EDGE-LIT SNAP-IN DOWNLIGHTS .....       | 10 |
| LED RECESSED 4" HI CRI CQ DOWNLIGHTS .....                   | 11 |
| LED RECESSED 5/6" HI CRI CQ DOWNLIGHTS .....                 | 11 |
| LED JUNCTION BOX 5/6" DOWNLIGHTS .....                       | 11 |
| LED DELUX SERIES ROUND SNAP-IN 6" DOWNLIGHTS .....           | 11 |
| LED DELUX SERIES ROUND SNAP-IN TRIM RINGS .....              | 11 |
| LED RECESSED 4" DOWNLIGHTS .....                             | 12 |
| LED RECESSED 5/6" DOWNLIGHTS .....                           | 12 |
| LED SQUARE SNAP-IN 4" DOWNLIGHTS .....                       | 12 |
| LED SQUARE SNAP-IN 6" DOWNLIGHTS .....                       | 12 |
| LED SQUARE SNAP-IN 8" DOWNLIGHTS .....                       | 12 |
| LED ROUND SNAP-IN 4" DOWNLIGHTS .....                        | 13 |
| LED ROUND SNAP-IN 6" DOWNLIGHTS .....                        | 13 |
| LED ROUND SNAP-IN 8" DOWNLIGHTS .....                        | 13 |
| LED ALLUSION RECESSED 5/6" DOWNLIGHTS .....                  | 13 |

## OUTDOOR LED LUMINAIRES 14-19

|                                               |       |
|-----------------------------------------------|-------|
| LED SELECT SERIES WALL PACKS .....            | 15    |
| LED NON-CUTOFF WALL PACKS, ACRYLIC LENS ..... | 15    |
| LED ADJUSTABLE WALL PACKS .....               | 15    |
| LED CANOPY LIGHTS .....                       | 16    |
| LED POST TOP .....                            | 16    |
| LED FLOOD LIGHTS .....                        | 16    |
| LED BARN LIGHT LUMINAIRES .....               | 17    |
| LED SECURITY LIGHT LUMINAIRE .....            | 17    |
| LED AREA LIGHT LUMINAIRES, GEN 2 .....        | 18-19 |

## HORTICULTURE LIGHTING 20-21

|                                                     |    |
|-----------------------------------------------------|----|
| HORTICULTURE LED VAPOR TIGHT .....                  | 21 |
| HTM SERIES MODULAR HORTICULTURE LED TOP LIGHT ..... | 21 |
| HORTICULTURE LED STARLIGHT .....                    | 21 |

## SMARTSTUFF™ CONTROLS 22-23

|                                                               |    |
|---------------------------------------------------------------|----|
| SMARTSTUFF™ LED BLUETOOTH® LAMPS .....                        | 23 |
| SMARTSTUFF SMARTBOX LED BLUETOOTH LUMINAIRE ACCESSORIES ..... | 23 |

## LED FILAMENT LAMPS 24-35

|                                                            |       |
|------------------------------------------------------------|-------|
| LED DIMMABLE HIGH CRI FILAMENT A19 LAMPS .....             | 25    |
| LED DIMMABLE HIGH CRI FILAMENT FB11 LAMPS .....            | 25-26 |
| LED NON-DIMMABLE SHAPE FILAMENT A19 LAMPS .....            | 27-28 |
| LED NON-DIMMABLE SHAPE FILAMENT G40 LAMPS .....            | 28    |
| LED DIMMABLE FILAMENT A15 LAMPS .....                      | 29    |
| LED DIMMABLE FILAMENT A19 LAMPS .....                      | 29    |
| LED DIMMABLE FILAMENT COLORED GLASS A19 LAMPS .....        | 29    |
| LED DIMMABLE FILAMENT SILVER BOWL A19 LAMPS .....          | 29    |
| LED AMBERGLOW 24K DIMMABLE DECO LAMPS .....                | 30    |
| LED AMBERGLOW 24K DIMMABLE A19 LAMPS .....                 | 31    |
| LED AMBERGLOW 24K DIMMABLE ST19 LAMPS .....                | 31    |
| LED AMBERGLOW 24K DIMMABLE G40 LAMPS .....                 | 31    |
| LED AMBERGLOW 24K DIMMABLE G25 LAMPS .....                 | 31    |
| LED AMBERGLOW 24K DIMMABLE G16 DECO LAMPS .....            | 31    |
| LED DIMMABLE GOOD LIFE A15 LAMPS .....                     | 32    |
| LED DIMMABLE GOOD LIFE A19 LAMPS .....                     | 32    |
| LED DIMMABLE GOOD LIFE R20 LAMPS .....                     | 32    |
| LED DIMMABLE GOOD LIFE BR30 LAMPS .....                    | 32    |
| LED DIMMABLE GOOD LIFE DECO LAMPS .....                    | 32    |
| LED DIMMABLE GOOD LIFE G25 LAMPS .....                     | 32    |
| LED DIMMABLE GOOD LIFE G40 LAMPS .....                     | 32    |
| LED DIMMABLE GOOD LIFE ST19 LAMPS .....                    | 32    |
| LED DIM SOFT ANTIQUE CLASSIC FILAMENT A19 LAMPS .....      | 33    |
| LED DIM SOFT ANTIQUE CLASSIC FILAMENT B11 DECO LAMPS ..... | 33    |
| LED DIM SOFT ANTIQUE CLASSIC FILAMENT F11 DECO LAMPS ..... | 33    |
| LED DIM SOFT ANTIQUE CLASSIC FILAMENT G25 LAMPS .....      | 33    |
| LED DIM SOFT ANTIQUE CLASSIC FILAMENT ST19 LAMPS .....     | 33    |
| LED DIM SOFT ANTIQUE CLASSIC FILAMENT T10 LAMPS .....      | 33    |
| LED DIM SOFT ANTIQUE CLASSIC FILAMENT T6 LAMPS .....       | 33    |
| LED DIM SOFT ANTIQUE SPIRAL FILAMENT A19 LAMPS .....       | 34    |
| LED DIM SOFT ANTIQUE SPIRAL FILAMENT B11 DECO LAMPS .....  | 34    |
| LED DIM SOFT ANTIQUE SPIRAL FILAMENT G30 LAMPS .....       | 34    |
| LED DIM SOFT ANTIQUE SPIRAL FILAMENT G40 LAMPS .....       | 34    |
| LED DIM SOFT ANTIQUE SPIRAL FILAMENT ST19 LAMPS .....      | 34    |
| LED DIM SOFT ANTIQUE SPIRAL FILAMENT T9 LAMPS .....        | 34    |
| LED DIM CLASSIC FILAMENT T6 T-LAMPS .....                  | 35    |
| LED DIM CLASSIC FILAMENT T10 T-LAMPS .....                 | 35    |
| LED DIM CLASSIC FILAMENT T25 T-LAMPS .....                 | 35    |
| LED DIM CLASSIC FILAMENT T30 T-LAMPS .....                 | 35    |

## LED LAMPS 36-69

|                                                      |       |
|------------------------------------------------------|-------|
| LED HIGH LUMEN DIMMABLE ELITE PAR38 .....            | 37    |
| LED HIGH OUTPUT DIMMABLE ELITE PAR38 .....           | 38    |
| LED DIMMABLE ELITE PAR38 .....                       | 39-40 |
| LED DIMMABLE ELITE PAR30 .....                       | 41-42 |
| LED DIMMABLE ELITE PAR30 SHORT NECK .....            | 43    |
| LED DIMMABLE ELITE PAR20 .....                       | 44    |
| LED DIMMABLE SMD PAR38 .....                         | 45    |
| LED DIMMABLE SMD PAR30 .....                         | 46    |
| LED DIMMABLE SMD PAR30 SHORT NECK .....              | 46    |
| LED DIMMABLE SMD PAR20 .....                         | 46    |
| LED HIGH OUTPUT, HIGH CRI DIMMABLE ELITE PAR38 ..... | 47    |
| LED HIGH CRI DIMMABLE ELITE PAR38 .....              | 47    |
| LED HIGH CRI DIMMABLE ELITE PAR30 .....              | 47    |
| LED HIGH CRI DIMMABLE ELITE PAR30 SHORT NECK .....   | 47    |
| LED DIMMABLE ELITE BR40 .....                        | 48    |
| LED DIMMABLE ELITE BR30 .....                        | 48    |

|                                                      |       |
|------------------------------------------------------|-------|
| LED DIMMABLE ELITE R20 .....                         | 48    |
| LED DIMMABLE ELITE BR30 2 PACK .....                 | 49    |
| LED NON DIMMABLE ELITE BR40 .....                    | 49    |
| LED NON DIMMABLE ELITE BR30 .....                    | 49    |
| LED DIMMABLE ELITE AMBER LENS BR30 .....             | 49    |
| LED DIMMABLE ELITE OMNIDIRECTIONAL A-LAMPS .....     | 50-52 |
| LED NON DIMMABLE OMNIDIRECTIONAL A-LAMPS .....       | 50-52 |
| LED NON DIMMABLE GENERAL PURPOSE A-LAMPS .....       | 50-52 |
| LED DIMMABLE ELITE GU24 BASED A-LAMPS .....          | 53    |
| LED DIMMABLE ELITE WET LOCATION OMNI A-LAMPS .....   | 53    |
| LED DIMMABLE ELITE THREE WAY A-LAMPS .....           | 53    |
| LED DIMMABLE ELITE VALUE GU5.3 MR16 .....            | 54    |
| LED DIMMABLE ELITE HIGH CRI GU5.3 MR16 .....         | 54    |
| LED DIMMABLE ELITE GU10 MR16 .....                   | 55    |
| LED DIMMABLE ELITE PAR16 .....                       | 55    |
| LED DIMMABLE ELITE G25 .....                         | 56    |
| LED NON DIMMABLE WET LOCATION S14 .....              | 56    |
| LED 5W DECO LAMPS .....                              | 57    |
| LED 4W DECO LAMPS .....                              | 58    |
| LED NON DIMMABLE 120-277V A23 LAMPS .....            | 59    |
| LED NON DIMMABLE 120-277V A21 LAMPS .....            | 59    |
| LED NON DIMMABLE 120-277V A19 LAMPS .....            | 59    |
| LED NON DIMMABLE 120-277V BR30 LAMPS .....           | 60    |
| LED NON DIMMABLE 120-277V PAR38 LAMPS .....          | 60    |
| LED DIMMABLE ALLUSION PAR38 LAMPS .....              | 61    |
| LED DIMMABLE ALLUSION PAR30 LAMPS .....              | 61    |
| LED DIMMABLE ALLUSION PAR20 LAMPS .....              | 61    |
| LED DIMMABLE ALLUSION MR16 LAMPS .....               | 61    |
| LED DIMMABLE ALLUSION SL16 LAMPS .....               | 61    |
| LED DIMMABLE ALLUSION 5/6" DOWNLIGHTS .....          | 61    |
| LED DIMMABLE ALLUSION BR30 LAMPS .....               | 61    |
| LED DIMMABLE ALLUSION A19 LAMPS .....                | 61    |
| LED DIMMABLE ALLUSION B11 DECO LAMPS .....           | 61    |
| LED DIMMABLE PROLINE PAR38 LAMPS .....               | 62    |
| LED DIMMABLE PROLINE PAR30 LAMPS .....               | 62    |
| LED DIMMABLE PROLINE PAR20 LAMPS .....               | 62    |
| LED DIMMABLE PROLINE BR40 LAMPS .....                | 62    |
| LED DIMMABLE PROLINE BR30 LAMPS .....                | 62    |
| LED DIMMABLE PROLINE R20 LAMPS .....                 | 62    |
| LED DIMMABLE PROLINE ALL GLASS G25 LAMPS .....       | 63    |
| LED DIMMABLE PROLINE ALL GLASS B11 LAMPS .....       | 63    |
| LED DIMMABLE PROLINE ALL GLASS A19 LAMPS .....       | 63    |
| LED NON DIMMABLE PROLINE ALL GLASS A19 LAMPS .....   | 63    |
| LED DIMMABLE PROLINE A19 LAMPS .....                 | 63    |
| LED NON DIMMABLE PROLINE A19 LAMPS .....             | 63    |
| LED DIMMABLE VERTICAL BR30 PL TYPE A LAMPS .....     | 64    |
| LED DIMMABLE VERTICAL BR40 PL TYPE A LAMPS .....     | 64    |
| LED NON DIMMABLE QUAD PL LAMPS .....                 | 65    |
| LED NON DIMMABLE PL 3U LAMPS .....                   | 65    |
| LED NON DIMMABLE PLL LAMPS .....                     | 66    |
| LED DIMMABLE ROTATING HORIZONTAL SHAPE LAMPS .....   | 66    |
| LED NON DIMMABLE PL TYPE B LAMPS .....               | 66-67 |
| LED NON DIMMABLE PL 2U LAMPS .....                   | 66    |
| LED DIMMABLE ADJUSTABLE SHAPE PL TYPE AB LAMPS ..... | 67    |
| LED NON DIMMABLE PL LAMPS GU24 BASE .....            | 68    |
| LED DIMMABLE ACCENT LAMPS .....                      | 69    |
| LED NON DIMMABLE ACCENT LAMPS .....                  | 69    |
| LED ELEVATOR LAMPS .....                             | 69    |

## STARLIGHT SERIES LAMPS 70-71

|                                                |    |
|------------------------------------------------|----|
| LED DIMMABLE STARLIGHT SERIES SL13 LAMPS ..... | 71 |
| LED DIMMABLE STARLIGHT SERIES SL16 LAMPS ..... | 71 |
| LED DIMMABLE STARLIGHT SERIES SL19 LAMPS ..... | 71 |
| LED DIMMABLE STARLIGHT SERIES SL22 LAMPS ..... | 71 |
| STARLIGHT MATCHING PENDANT MOUNTS.....         | 71 |

## LED HID REPLACEMENT LAMPS 72-77

|                                                             |       |
|-------------------------------------------------------------|-------|
| LED HID REPLACEMENT LAMP, E26 AND EX39 BASES.....           | 73-74 |
| LED HID REPLACEMENT AREA LAMP, E26 AND EX39 BASES.....      | 74    |
| LED HID REPLACEMENT CORN COB LAMP, E26 AND EX39 BASES ..... | 75-76 |
| LED HID CORN COB LAMP SENSORS .....                         | 77    |

## LED T8 AND T5 TUBES 78-89

|                                                                |    |
|----------------------------------------------------------------|----|
| LIBERAT8™ LED BALLAST BYPASS 4 FT ALL GLASS TUBES.....         | 79 |
| LIBERAT8™ LED BALLAST BYPASS 4 FT PET COATED GLASS TUBES ....  | 79 |
| LIBERAT8™ LED BALLAST BYPASS 3 FT PET COATED GLASS TUBES ....  | 79 |
| LIBERAT8™ LED BALLAST BYPASS 2 FT PET COATED GLASS TUBES ....  | 79 |
| LIBERAT8™ LED BYPASS 8 FT GLASS TUBES, R17D BASE .....         | 80 |
| LIBERAT8™ LED BYPASS 8 FT GLASS TUBES, FA8 BASE .....          | 80 |
| LIBERAT8™ LED BALLAST BYPASS 2 FT U-BEND PLASTIC TUBES.....    | 80 |
| LIBERAT8™ LED HIGH OUTPUT BALLAST BYPASS 4 FT GLASS TUBES .81  |    |
| LIBERAT5™ LED HIGH OUTPUT BALLAST BYPASS 2 FT GLASS TUBES .82  |    |
| LIBERAT5™ LED HIGH OUTPUT BALLAST BYPASS 3 FT GLASS TUBES .82  |    |
| LIBERAT5™ LED HIGH OUTPUT BALLAST BYPASS 4 FT GLASS TUBES .82  |    |
| LIBERAT5™ LED BALLAST BYPASS 2 FT GLASS TUBES.....             | 82 |
| LIBERAT5™ LED BALLAST BYPASS 3 FT GLASS TUBES.....             | 82 |
| LIBERAT5™ LED BALLAST BYPASS 4 FT GLASS TUBES.....             | 82 |
| DIRECT8™ LED INSTANT START 4 FT GLASS TUBES.....               | 83 |
| DIRECT8™ LED IS HIGH CRI 4 FT GLASS TUBES .....                | 83 |
| DIRECT8™ LED IS HIGH OUTPUT 4 FT PET COATED GLASS TUBES.....   | 84 |
| DIRECT8™ LED IS HIGH EFFICACY 4 FT GLASS TUBES.....            | 84 |
| DIRECT8™ LED IS HIGH EFFICACY 4 FT GLASS TUBES BULK.....       | 84 |
| DIRECT8™ LED IS/RS HIGH EFFICACY 3 FT GLASS TUBES.....         | 84 |
| DIRECT8™ LED IS/RS HIGH EFFICACY 2 FT GLASS TUBES.....         | 84 |
| DIRECT8™ LED IS 4 FT SHATTERPROOF PLASTIC TUBES BULK .....     | 85 |
| DIRECT8™ LED IS/RS 4 FT SHATTERPROOF GLASS TUBES .....         | 85 |
| DIRECT8™ LED IS/RS U-BEND 6 INCH PLASTIC TUBES.....            | 85 |
| DIRECT5™ LED ELEC. BALLAST 4 FT SHATTERPROOF GLASS TUBES ..... | 86 |
| LED T8 TYPE AB 4 FT GLASS TUBES.....                           | 86 |
| LED T8 TYPE AB 4 FT SHATTERPROOF COATED TUBES .....            | 86 |
| CORRELAT8 LED T8 4 FT TYPE C TUBES, G13 BASE .....             | 87 |
| CORRELAT5 LED T5 4 FT TYPE C TUBES, G13 BASE, ITEMS HO .....   | 87 |
| CORRELAT5 LED T5 4 FT TYPE C TUBES, G13 BASE, ITEMS HE.....    | 87 |
| PROLINE INSTANT START COMPATIBLE T8 TUBES, TYPE A .....        | 88 |
| PROLINE INSTANT START 4 FT U-BEND PLASTIC TUBE .....           | 88 |
| PROLINE INSTANT START COMPATIBLE T8 TUBES, TYPE B .....        | 88 |
| PROLINE INSTANT START COMPATIBLE T8 TUBES, TYPE AB .....       | 88 |
| T8 READY ELITE HIGH BAY .....                                  | 89 |
| LED MAGNETIC RETROFIT KITS .....                               | 89 |

## CFL LAMPS 90-93

|                                           |    |
|-------------------------------------------|----|
| CFL PRO SERIES T3 FULL SPRINGLAMPS® ..... | 91 |
| CFL PRO SERIES T2 FULL SPRINGLAMPS® ..... | 91 |
| CFL SPRINGLAMPS®, MOGUL BASE.....         | 91 |
| CFL SPRINGLIGHT™ SPRINGLAMPS® .....       | 92 |
| T6 CIRCLINE LAMPS .....                   | 93 |
| T9 CIRCLINE LAMPS .....                   | 93 |
| CIRCLINE BALLASTS.....                    | 93 |
| CFL SPRINGLAMPS®, GU24 BASE .....         | 93 |

## EXIT AND EMERGENCY 94-96

|                                                      |    |
|------------------------------------------------------|----|
| EMERGENCY LIGHTING/EXIT SIGN REMOTE HEAD LIGHTS..... | 95 |
| STANDARD EMERGENCY LIGHTS.....                       | 95 |
| LED EXIT SIGNS .....                                 | 95 |
| LED DIECAST EXIT SIGNS .....                         | 95 |
| LED COMBO EXIT SIGNS .....                           | 96 |
| EXIT SIGN LED RETROFITS .....                        | 96 |
| BATTERIES .....                                      | 96 |
| WIRE GUARDS .....                                    | 96 |





# INDOOR LED LUMINAIRES

Whether you're looking for high bay luminaires, troffers, general purpose strips or a recessed commercial downlight, TCP offers you a full complement of Indoor LED luminaire products.

# INDOOR LED LUMINAIRES



| Item Number                                                                                                  | Item Description                                                                         | Voltage  | Dimming | Wattage <sup>1</sup> | Lumens <sup>2</sup>  | LPW                     | CCT (K) | CRI | Rated Life (hrs) | Options                                         |
|--------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------|----------|---------|----------------------|----------------------|-------------------------|---------|-----|------------------|-------------------------------------------------|
| 50,000 HOUR LED WATTAGE SELECTABLE BACK-LIT DIRECT TROFFER LUMINAIRES                                        |                                                                                          |          |         |                      |                      |                         |         |     |                  |                                                 |
| 2x2 LED WATTAGE SELECTABLE BACK-Lit DIRECT TROFFER FLAT PANELS — KIT ITEMS; DRIVER SHIPS SEPARATE FROM PANEL |                                                                                          |          |         |                      |                      |                         |         |     |                  |                                                 |
| DTF2UZDB130K                                                                                                 | 23, 29, 38 Wattage Selectable Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 30K | 120-277V | 0-10V   | 23<br>29<br>38       | 2600<br>3200<br>4200 | 113<br>110.3<br>110.5   | 3000    | >80 | 50,000           | Emergency Back-Up<br><br>Single Pack, Assembled |
| DTF2UZDB135K                                                                                                 | 23, 29, 38 Wattage Selectable Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 35K | 120-277V | 0-10V   | 23<br>29<br>38       | 2600<br>3200<br>4200 | 113<br>110.3<br>110.5   | 3500    | >80 | 50,000           |                                                 |
| DTF2UZDB141K                                                                                                 | 23, 29, 38 Wattage Selectable Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 41K | 120-277V | 0-10V   | 23<br>29<br>38       | 2600<br>3200<br>4200 | 113<br>110.3<br>110.5   | 4100    | >80 | 50,000           |                                                 |
| DTF2UZDB150K                                                                                                 | 23, 29, 38 Wattage Selectable Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 50K | 120-277V | 0-10V   | 23<br>29<br>38       | 2600<br>3200<br>4200 | 113<br>110.3<br>110.5   | 5000    | >80 | 50,000           |                                                 |
| 2x4 LED WATTAGE SELECTABLE BACK-Lit DIRECT TROFFER FLAT PANELS — KIT ITEMS; DRIVER SHIPS SEPARATE FROM PANEL |                                                                                          |          |         |                      |                      |                         |         |     |                  |                                                 |
| DTF4UZDB130K                                                                                                 | 29, 39, 46 Wattage Selectable Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 30K | 120-277V | 0-10V   | 29<br>39<br>46       | 3300<br>4400<br>5100 | 113.8<br>112.8<br>110.9 | 3000    | >80 | 50,000           | Emergency Back-Up<br><br>Single Pack, Assembled |
| DTF4UZDB135K                                                                                                 | 29, 39, 46 Wattage Selectable Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 35K | 120-277V | 0-10V   | 29<br>39<br>46       | 3300<br>4400<br>5100 | 113.8<br>112.8<br>110.9 | 3500    | >80 | 50,000           |                                                 |
| DTF4UZDB141K                                                                                                 | 29, 39, 46 Wattage Selectable Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 41K | 120-277V | 0-10V   | 29<br>39<br>46       | 3300<br>4400<br>5100 | 113.8<br>112.8<br>110.9 | 4100    | >80 | 50,000           |                                                 |
| DTF4UZDB150K                                                                                                 | 29, 39, 46 Wattage Selectable Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 50K | 120-277V | 0-10V   | 29<br>39<br>46       | 3300<br>4400<br>5100 | 113.8<br>112.8<br>110.9 | 5000    | >80 | 50,000           |                                                 |
| 50,000 HOUR LED DIRECT TROFFER LUMINAIRES (CONSULT SPEC SHEET FOR ORDERING MATRIX)                           |                                                                                          |          |         |                      |                      |                         |         |     |                  |                                                 |
| 2x2 LED DIRECT TROFFER FLAT PANELS — FULLY ASSEMBLED; DRIVER ATTACHED TO PANEL                               |                                                                                          |          |         |                      |                      |                         |         |     |                  |                                                 |
| DTF2UZD2330K                                                                                                 | 23W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 30K                           | 120-277V | 0-10V   | 23                   | 2600                 | 113                     | 3000    | >80 | 50,000           | SBS - Factory Installed Smart Box w/ Sensor     |
| DTF2UZD2335K                                                                                                 | 23W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 35K                           | 120-277V | 0-10V   | 23                   | 2600                 | 113                     | 3500    | >80 | 50,000           |                                                 |
| DTF2UZD2341K                                                                                                 | 23W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 41K                           | 120-277V | 0-10V   | 23                   | 2600                 | 113                     | 4100    | >80 | 50,000           |                                                 |
| DTF2UZD2350K                                                                                                 | 23W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 50K                           | 120-277V | 0-10V   | 23                   | 2600                 | 113                     | 5000    | >80 | 50,000           |                                                 |
| DTF2UZD2930K                                                                                                 | 29W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 30K                           | 120-277V | 0-10V   | 29                   | 3200                 | 110.3                   | 3000    | >80 | 50,000           | SM - Smart Box                                  |
| DTF2UZD2935K                                                                                                 | 29W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 35K                           | 120-277V | 0-10V   | 29                   | 3200                 | 110.3                   | 3500    | >80 | 50,000           |                                                 |
| DTF2UZD2941K                                                                                                 | 29W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 41K                           | 120-277V | 0-10V   | 29                   | 3200                 | 110.3                   | 4100    | >80 | 50,000           |                                                 |
| DTF2UZD2950K                                                                                                 | 29W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 50K                           | 120-277V | 0-10V   | 29                   | 3200                 | 110.3                   | 5000    | >80 | 50,000           |                                                 |
| DTF2UZD3830K                                                                                                 | 38W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 30K                           | 120-277V | 0-10V   | 38                   | 4200                 | 110.5                   | 3000    | >80 | 50,000           | Emergency Back-Up                               |
| DTF2UZD3835K                                                                                                 | 38W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 35K                           | 120-277V | 0-10V   | 38                   | 4200                 | 110.5                   | 3500    | >80 | 50,000           |                                                 |
| DTF2UZD3841K                                                                                                 | 38W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 41K                           | 120-277V | 0-10V   | 38                   | 4200                 | 110.5                   | 4100    | >80 | 50,000           |                                                 |
| DTF2UZD3850K                                                                                                 | 38W Flat Panel, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 50K                           | 120-277V | 0-10V   | 38                   | 4200                 | 110.5                   | 5000    | >80 | 50,000           |                                                 |
| 2x4 LED DIRECT TROFFER FLAT PANELS — FULLY ASSEMBLED; DRIVER ATTACHED TO PANEL                               |                                                                                          |          |         |                      |                      |                         |         |     |                  |                                                 |
| DTF4UZD2930K                                                                                                 | 29W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 30K                           | 120-277V | 0-10V   | 29                   | 3300                 | 113.8                   | 3000    | >80 | 50,000           | SBS - Factory Installed Smart Box w/ Sensor     |
| DTF4UZD2935K                                                                                                 | 29W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 35K                           | 120-277V | 0-10V   | 29                   | 3300                 | 113.8                   | 3500    | >80 | 50,000           |                                                 |
| DTF4UZD2941K                                                                                                 | 29W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 41K                           | 120-277V | 0-10V   | 29                   | 3300                 | 113.8                   | 4100    | >80 | 50,000           |                                                 |
| DTF4UZD2950K                                                                                                 | 29W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 50K                           | 120-277V | 0-10V   | 29                   | 3300                 | 113.8                   | 5000    | >80 | 50,000           |                                                 |
| DTF4UZD3930K                                                                                                 | 39W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 30K                           | 120-277V | 0-10V   | 39                   | 4400                 | 112.8                   | 3000    | >80 | 50,000           | SM - Smart Box                                  |
| DTF4UZD3935K                                                                                                 | 39W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 35K                           | 120-277V | 0-10V   | 39                   | 4400                 | 112.8                   | 3500    | >80 | 50,000           |                                                 |
| DTF4UZD3941K                                                                                                 | 39W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 41K                           | 120-277V | 0-10V   | 39                   | 4400                 | 112.8                   | 4100    | >80 | 50,000           |                                                 |
| DTF4UZD3950K                                                                                                 | 39W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 50K                           | 120-277V | 0-10V   | 39                   | 4400                 | 112.8                   | 5000    | >80 | 50,000           |                                                 |
| DTF4UZD4630K                                                                                                 | 46W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 30K                           | 120-277V | 0-10V   | 46                   | 5100                 | 110.9                   | 3000    | >80 | 50,000           | Emergency Back-Up                               |
| DTF4UZD4635K                                                                                                 | 46W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 35K                           | 120-277V | 0-10V   | 46                   | 5100                 | 110.9                   | 3500    | >80 | 50,000           |                                                 |
| DTF4UZD4641K                                                                                                 | 46W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 41K                           | 120-277V | 0-10V   | 46                   | 5100                 | 110.9                   | 4100    | >80 | 50,000           |                                                 |
| DTF4UZD4650K                                                                                                 | 46W Flat Panel, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 50K                           | 120-277V | 0-10V   | 46                   | 5100                 | 110.9                   | 5000    | >80 | 50,000           |                                                 |

## AVAILABLE ACCESSORIES (ordered separately)

**YHANGER6PK** – Y Fit Cable Hanger 6 Pack  
**DRVEXTCABLE** – 3 FT Driver Extension Cable

**DTSK1** – 1X4 Direct Troffer Surface Mount Kit (White)  
**DTSK2** – 2X2 Direct Troffer Surface Mount Kit (White)  
**DTSK4** – 2X4 Direct Troffer Surface Mount Kit (White)

**DTFLK1** – 1X4 Recess Mount Flange Kit  
**DTFLK2** – 2X2 Recess Mount Flange Kit  
**DTFLK4** – 2X4 Recess Mount Flange Kit

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

For the most up-to-date specs and warranty information, please visit [www.tcp.com](http://www.tcp.com)



**5 YEAR WARRANTY**

Many items are DLC QPL  
 Visit [www.designlights.org/qpl](http://www.designlights.org/qpl) for a full listing.



Item Number

Item Description

Voltage

Dimming

Wattage<sup>1</sup>Lumens<sup>2</sup>

LPW

CCT (K)

CRI

Rated Life (hrs)

Options

**50,000 HOUR LED DESIGNER SERIES WATTAGE SELECTABLE VOLUMETRIC LUMINAIRES****2x2 DESIGNER SERIES WATTAGE SELECTABLE VOLUMETRIC LUMINAIRES DAMP LOCATION RATED, SHIPPED FULLY ASSEMBLED****Luxterior**  
by TCP

|              |                                                                                                  |          |       |    |      |       |      |     |        |
|--------------|--------------------------------------------------------------------------------------------------|----------|-------|----|------|-------|------|-----|--------|
| TRV2UZD23CCT | 23, 29, 38 Wattage Selectable Volumetric Troffer, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 30K | 120-277V | 0-10V | 23 | 3100 | 134.8 | 3000 | >80 | 50,000 |
|              |                                                                                                  |          |       | 29 | 3800 | 131   |      |     |        |
|              |                                                                                                  |          |       | 38 | 4800 | 126.3 |      |     |        |
| TRV2UZDA135K | 23, 29, 38 Wattage Selectable Volumetric Troffer, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 35K | 120-277V | 0-10V | 23 | 3100 | 134.8 | 3500 | >80 | 50,000 |
|              |                                                                                                  |          |       | 29 | 3800 | 131   |      |     |        |
|              |                                                                                                  |          |       | 38 | 4800 | 126.3 |      |     |        |
| TRV2UZDA141K | 23, 29, 38 Wattage Selectable Volumetric Troffer, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 41K | 120-277V | 0-10V | 23 | 3100 | 134.8 | 4100 | >80 | 50,000 |
|              |                                                                                                  |          |       | 29 | 3800 | 131   |      |     |        |
|              |                                                                                                  |          |       | 38 | 4800 | 126.3 |      |     |        |
| TRV2UZDA150K | 23, 29, 38 Wattage Selectable Volumetric Troffer, 2x2, Frosted Diffuser Lens, 0-10V Dimming, 50K | 120-277V | 0-10V | 23 | 3100 | 134.8 | 5000 | >80 | 50,000 |
|              |                                                                                                  |          |       | 29 | 3800 | 131   |      |     |        |
|              |                                                                                                  |          |       | 38 | 4800 | 126.3 |      |     |        |

**2x4 DESIGNER SERIES WATTAGE SELECTABLE VOLUMETRIC LUMINAIRES DAMP LOCATION RATED, SHIPPED FULLY ASSEMBLED****Luxterior**  
by TCP

|              |                                                                                                  |          |       |    |      |       |      |     |        |
|--------------|--------------------------------------------------------------------------------------------------|----------|-------|----|------|-------|------|-----|--------|
| TRV4UZDA130K | 29, 38, 46 Wattage Selectable Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 30K | 120-277V | 0-10V | 29 | 4000 | 137.9 | 3000 | >80 | 50,000 |
|              |                                                                                                  |          |       | 38 | 5200 | 136.8 |      |     |        |
|              |                                                                                                  |          |       | 46 | 6000 | 130.4 |      |     |        |
| TRV4UZDA135K | 29, 38, 46 Wattage Selectable Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 35K | 120-277V | 0-10V | 29 | 4000 | 137.9 | 3500 | >80 | 50,000 |
|              |                                                                                                  |          |       | 38 | 5200 | 136.8 |      |     |        |
|              |                                                                                                  |          |       | 46 | 6000 | 130.4 |      |     |        |
| TRV4UZDA141K | 29, 38, 46 Wattage Selectable Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 41K | 120-277V | 0-10V | 29 | 4000 | 137.9 | 4100 | >80 | 50,000 |
|              |                                                                                                  |          |       | 38 | 5200 | 136.8 |      |     |        |
|              |                                                                                                  |          |       | 46 | 6000 | 130.4 |      |     |        |
| TRV4UZDA150K | 29, 38, 46 Wattage Selectable Volumetric Troffer, 2x4, Frosted Diffuser Lens, 0-10V Dimming, 50K | 120-277V | 0-10V | 29 | 4000 | 137.9 | 5000 | >80 | 50,000 |
|              |                                                                                                  |          |       | 38 | 5200 | 136.8 |      |     |        |
|              |                                                                                                  |          |       | 46 | 6000 | 130.4 |      |     |        |

**50,000 HOUR LED LINEAR HIGH BAY LUMINAIRES****HB BY TCP LED LINEAR HIGH BAY****HB**  
by TCP

|            |                                          |          |       |     |        |     |      |    |        |
|------------|------------------------------------------|----------|-------|-----|--------|-----|------|----|--------|
| HB9000140  | LED Linear High Bay, 120-277V, 90W, 40K  | 120-277V | 0-10V | 90  | 11,700 | 130 | 4000 | 82 | 50,000 |
| HB9000150  | LED Linear High Bay, 120-277V, 90W, 50K  | 120-277V | 0-10V | 90  | 11,700 | 130 | 5000 | 82 | 50,000 |
| HB9000240  | LED Linear High Bay, 347-480V, 90W, 40K  | 347-480V | 0-10V | 90  | 11,700 | 130 | 4000 | 82 | 50,000 |
| HB9000250  | LED Linear High Bay, 347-480V, 90W, 50K  | 347-480V | 0-10V | 90  | 11,700 | 130 | 5000 | 82 | 50,000 |
| HB10500140 | LED Linear High Bay, 120-277V, 105W, 40K | 120-277V | 0-10V | 105 | 13,650 | 130 | 4000 | 82 | 50,000 |
| HB10500150 | LED Linear High Bay, 120-277V, 105W, 50K | 120-277V | 0-10V | 105 | 13,650 | 130 | 5000 | 82 | 50,000 |
| HB10500240 | LED Linear High Bay, 347-480V, 105W, 40K | 347-480V | 0-10V | 105 | 13,650 | 130 | 4000 | 82 | 50,000 |
| HB10500250 | LED Linear High Bay, 347-480V, 105W, 50K | 347-480V | 0-10V | 105 | 13,650 | 130 | 5000 | 82 | 50,000 |
| HB15000140 | LED Linear High Bay, 120-277V, 150W, 40K | 120-277V | 0-10V | 150 | 19,500 | 130 | 4000 | 82 | 50,000 |
| HB15000150 | LED Linear High Bay, 120-277V, 150W, 50K | 120-277V | 0-10V | 150 | 19,500 | 130 | 5000 | 82 | 50,000 |
| HB15000240 | LED Linear High Bay, 347-480V, 150W, 40K | 347-480V | 0-10V | 150 | 19,500 | 130 | 4000 | 82 | 50,000 |
| HB15000250 | LED Linear High Bay, 347-480V, 150W, 50K | 347-480V | 0-10V | 150 | 19,500 | 130 | 5000 | 82 | 50,000 |
| HB17500140 | LED Linear High Bay, 120-277V, 175W, 40K | 120-277V | 0-10V | 175 | 22,750 | 130 | 4000 | 82 | 50,000 |
| HB17500150 | LED Linear High Bay, 120-277V, 175W, 50K | 120-277V | 0-10V | 175 | 22,750 | 130 | 5000 | 82 | 50,000 |
| HB17500240 | LED Linear High Bay, 347-480V, 175W, 40K | 347-480V | 0-10V | 175 | 22,750 | 130 | 4000 | 82 | 50,000 |
| HB17500250 | LED Linear High Bay, 347-480V, 175W, 50K | 347-480V | 0-10V | 175 | 22,750 | 130 | 5000 | 82 | 50,000 |
| HB21000140 | LED Linear High Bay, 120-277V, 210W, 40K | 120-277V | 0-10V | 210 | 27,300 | 130 | 4000 | 82 | 50,000 |
| HB21000150 | LED Linear High Bay, 120-277V, 210W, 50K | 120-277V | 0-10V | 210 | 27,300 | 130 | 5000 | 82 | 50,000 |
| HB21000240 | LED Linear High Bay, 347-480V, 210W, 40K | 347-480V | 0-10V | 210 | 27,300 | 130 | 4000 | 82 | 50,000 |
| HB21000250 | LED Linear High Bay, 347-480V, 210W, 50K | 347-480V | 0-10V | 210 | 27,300 | 130 | 5000 | 82 | 50,000 |

**LS1** - Factory Installed Motion Sensor (120, 277, 347v)**LS1D** - Factory Installed Motion Sensor w/ Daylight Harvesting (120, 277, 347v)**LS4** - Factory Installed Motion Sensor(480v)**HB1WG** - Wire Guard for HB90W, HB105W and HB150W**HB2WG** - Wire Guard for HB175W and HB210W**OT00040** - Replacement Lens Panel for HB90W, HB105W and HB150W**OT00040A** - Replacement Lens Panel for HB175W and HB210W**MS1** - Factory installed microwave motion sensor(120-277v)

## 50,000 HOUR LED IB SERIES HIGH BAY LUMINAIRES

### IB SERIES LED 3 FOOT LINEAR HIGH BAY

|             |                                                 |          |       |     |        |     |      |    |        |                                                                                                                          |
|-------------|-------------------------------------------------|----------|-------|-----|--------|-----|------|----|--------|--------------------------------------------------------------------------------------------------------------------------|
| IB3UZDA440K | LED 3 Foot Linear High Bay, 120-277V, 310W, 40K | 120-277V | 0-10V | 310 | 40,300 | 130 | 4000 | 82 | 50,000 | <b>LS1</b> - Factory Installed Motion Sensor<br><br><b>LS1D</b> - Factory Installed Motion Sensor w/ Daylight Harvesting |
| IB3UZDA450K | LED 3 Foot Linear High Bay, 120-277V, 310W, 50K | 120-277V | 0-10V | 310 | 40,300 | 130 | 5000 | 82 | 50,000 | <b>10C</b> - 10' Cord, No Plug                                                                                           |



### IB SERIES LED 4 FOOT LINEAR HIGH BAY

|             |                                                 |          |       |     |        |       |      |    |        |                                                                                                                          |
|-------------|-------------------------------------------------|----------|-------|-----|--------|-------|------|----|--------|--------------------------------------------------------------------------------------------------------------------------|
| IB4UZDA540K | LED 4 Foot Linear High Bay, 120-277V, 410W, 40K | 120-277V | 0-10V | 410 | 53,000 | 129.2 | 4000 | 82 | 50,000 | <b>LS1</b> - Factory Installed Motion Sensor<br><br><b>LS1D</b> - Factory Installed Motion Sensor w/ Daylight Harvesting |
| IB4UZDA550K | LED 4 Foot Linear High Bay, 120-277V, 410W, 50K | 120-277V | 0-10V | 410 | 53,000 | 129.2 | 5000 | 82 | 50,000 | <b>10C</b> - 10' Cord, No Plug                                                                                           |



## SMARTSTUFF SMARTBOX LED BLUETOOTH® LUMINAIRE ACCESSORIES

| Item Number | Item Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Voltage        | Dimming | Input Line Frequency | Max Power | Output Voltage | Operating Temp | Humidity | Radio Protocol | Communication Range | Options           |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------|----------------------|-----------|----------------|----------------|----------|----------------|---------------------|-------------------|
| SMBOXBT     | The TCP SmartBox is a Bluetooth Signal Mesh based lighting control device. Once connected to a luminaire, the Bluetooth Signal Mesh and SmartBox can be configured through the TCP SmartStuff App on any Android and iOS-based devices. Through the SmartStuff App, a luminaire can be directly controlled by the SmartBox or programmed to function automatically through a variety of control schemes. Suitable for both dry and damp locations.                                                                                                                                                      | 120-277V @15mA | 0-10V   | 50/60Hz              | 1W        | 0-10 VDC       | -23°F to 113°F | <80% RH  | Bluetooth®     | 150ft/46m           |                   |
| SMBOXFBT    | The SmartBox Fixture Sensor is a Bluetooth® Signal Mesh based lighting control device. Once connected to a luminaire, the SmartBox + Fixture Sensor provides Motion and Bi-Level Controls. The Fixture Sensor incorporates a microwave sensor that detects motion through nonmetallic objects and a light sensor to measure the ambient light in the area. The SmartBox + Fixture Sensor is compatible with any luminaire with 0-10V dim to off drivers/ballast and can be configured through the TCP SmartStuff App on any Android™ or Apple® Smart devices. Suitable for both dry and damp locations. | 120-277V @30mA | 0-10V   | 50/60Hz              | 2W        | 0-10 VDC       | -23°F to 113°F | <80% RH  | Bluetooth®     | 150ft/46m           | SmartStuff Remote |
| SMBOXPLBT   | The SmartBox + Panel Sensor is a lighting control device. Once connected to a luminaire, the SmartBox + Panel Sensor can use either a microwave or a PIR sensor to detect motion and a light sensor to measure the ambient light in the area. This allows the SmartBox + Panel Sensor to control any luminaire with 0-10V dim to off drivers/ballast. Suitable for both dry and damp locations.                                                                                                                                                                                                         | 120-277V @15mA | 0-10V   | 50/60Hz              | 1W        | 0-10 VDC       | -23°F to 113°F | <80% RH  | Bluetooth®     | 150ft/46m           |                   |





| Item Number | Item Description | Voltage | Dimming | Wattage <sup>1</sup> | Lumens <sup>2</sup> | LPW | CCT (K) | CRI | Rated Life (hrs) | Options |
|-------------|------------------|---------|---------|----------------------|---------------------|-----|---------|-----|------------------|---------|
|-------------|------------------|---------|---------|----------------------|---------------------|-----|---------|-----|------------------|---------|

## 50,000 HOUR LED UFO HIGH BAY LUMINAIRES

### LED UFO 11" High Bay Luminaires



|             |                                       |          |       |     |        |     |      |     |        |  |
|-------------|---------------------------------------|----------|-------|-----|--------|-----|------|-----|--------|--|
| UF0UZDB140K | LED UFO High Bay, 120-277V, 100W, 40K | 120-277V | 0-10V | 100 | 14,000 | 140 | 4000 | >80 | 50,000 |  |
| UF0UZDB150K | LED UFO High Bay, 120-277V, 100W, 50K | 120-277V | 0-10V | 100 | 14,000 | 140 | 5000 | >80 | 50,000 |  |
| UF0UZDB240K | LED UFO High Bay, 120-277V, 150W, 40K | 120-277V | 0-10V | 150 | 21,000 | 140 | 4000 | >80 | 50,000 |  |
| UF0UZDB250K | LED UFO High Bay, 120-277V, 150W, 50K | 120-277V | 0-10V | 150 | 21,000 | 140 | 5000 | >80 | 50,000 |  |
| UF0UZDB340K | LED UFO High Bay, 120-277V, 200W, 40K | 120-277V | 0-10V | 200 | 29,000 | 145 | 4000 | >80 | 50,000 |  |
| UF0UZDB350K | LED UFO High Bay, 120-277V, 200W, 50K | 120-277V | 0-10V | 200 | 29,000 | 145 | 5000 | >80 | 50,000 |  |

### LED UFO 14.25" High Bay Luminaires



|             |                                       |          |       |     |        |     |      |     |        |  |
|-------------|---------------------------------------|----------|-------|-----|--------|-----|------|-----|--------|--|
| UF0UZDB440K | LED UFO High Bay, 120-277V, 240W, 40K | 120-277V | 0-10V | 240 | 34,800 | 145 | 4000 | >80 | 50,000 |  |
| UF0UZDB450K | LED UFO High Bay, 120-277V, 240W, 50K | 120-277V | 0-10V | 240 | 34,800 | 145 | 5000 | >80 | 50,000 |  |
| UF0UZDB540K | LED UFO High Bay, 120-277V, 300W, 40K | 120-277V | 0-10V | 300 | 43,500 | 145 | 4000 | >80 | 50,000 |  |
| UF0UZDB550K | LED UFO High Bay, 120-277V, 300W, 50K | 120-277V | 0-10V | 300 | 43,500 | 145 | 5000 | >80 | 50,000 |  |

## 50,000 HOUR LED ROUND HIGH BAY LUMINAIRES

### LED ROUND HIGH BAY GEN 3, Wet Location Rated, IP65



Industra  
by TCP



|             |                                                             |          |       |     |        |     |      |    |        |  |
|-------------|-------------------------------------------------------------|----------|-------|-----|--------|-----|------|----|--------|--|
| RHBUZDA140K | Round High Bay, 120-277V, 13,200L, 80W, 0-10V Dimming, 40K  | 120-277V | 0-10V | 80  | 13,200 | 165 | 4000 | 80 | 50,000 |  |
| RHBUZDA150K | Round High Bay, 120-277V, 13,200L, 80W, 0-10V Dimming, 50K  | 120-277V | 0-10V | 80  | 13,200 | 165 | 5000 | 80 | 50,000 |  |
| RHBUZDA240K | Round High Bay, 120-277V, 16,500L, 100W, 0-10V Dimming, 40K | 120-277V | 0-10V | 100 | 16,500 | 165 | 4000 | 80 | 50,000 |  |
| RHBUZDA250K | Round High Bay, 120-277V, 16,500L, 100W, 0-10V Dimming, 50K | 120-277V | 0-10V | 100 | 16,500 | 165 | 5000 | 80 | 50,000 |  |
| RHBUZDA340K | Round High Bay, 120-277V, 24,750L, 150W, 0-10V Dimming, 40K | 120-277V | 0-10V | 150 | 24,750 | 165 | 4000 | 80 | 50,000 |  |
| RHBUZDA350K | Round High Bay, 120-277V, 24,750L, 150W, 0-10V Dimming, 50K | 120-277V | 0-10V | 150 | 24,750 | 165 | 5000 | 80 | 50,000 |  |
| RHBUZDA440K | Round High Bay, 120-277V, 33,000L, 200W, 0-10V Dimming, 40K | 120-277V | 0-10V | 200 | 33,000 | 165 | 4000 | 80 | 50,000 |  |
| RHBUZDA450K | Round High Bay, 120-277V, 33,000L, 200W, 0-10V Dimming, 50K | 120-277V | 0-10V | 200 | 33,000 | 165 | 5000 | 80 | 50,000 |  |

#### AVAILABLE ACCESSORIES (ordered separately)

**RHBPA34** – ¾" Pendant mount adapter  
**RHBPMJB34** – ¾" Pendant mount adapter w/junction  
**RHBSSENSOR1** – Wet location rated daylight harvesting occupancy sensor 120/277V

**RHBSREM1** – Optional infrared remote controller for programming RHBSSENSOR1  
**RHBBRKT** – Adjustable yoke bracket  
**HBRALUM90** – 90 degree aluminum reflector  
**HBRACREFL** – Acrylic refractor  
**HBRACLENS** – Acrylic lens for HBRACREFL

## 50,000 HOUR LED HBM SERIES MODULAR HIGH BAY



Industra  
by TCP

|                |                                                                             |          |       |     |        |     |      |    |        |  |
|----------------|-----------------------------------------------------------------------------|----------|-------|-----|--------|-----|------|----|--------|--|
| HBMUZDA450K90D | LED High Temp Modular High Bay, 120-277V, 30,000L, 200W, 0-10V Dimming, 50K | 120-277V | 0-10V | 200 | 30,000 | 150 | 5000 | 80 | 50,000 |  |
|----------------|-----------------------------------------------------------------------------|----------|-------|-----|--------|-----|------|----|--------|--|

#### AVAILABLE ACCESSORIES (ordered separately)

**HBMPTBAG** – Parts bag for modular assembly  
**EXPYHANGKIT10FT** – 100lb rated cable Y-hook hanging kit (1 kit needed per fixture)

\*\*Other reflector options available by special order. Contact manufacturer for more information.\*\*

| Item Number                                                          | Item Description                                | Voltage  | Dimming | Wattage <sup>1</sup> | Lumens <sup>2</sup> | LPW   | CCT(K) | CRI | Rated Life (hrs) | Power Factor |                                                                                       |
|----------------------------------------------------------------------|-------------------------------------------------|----------|---------|----------------------|---------------------|-------|--------|-----|------------------|--------------|---------------------------------------------------------------------------------------|
| 50,000 HOUR LED VAPOR TIGHT (CONSULT SPEC SHEET FOR ORDERING MATRIX) |                                                 |          |         |                      |                     |       |        |     |                  |              |                                                                                       |
| LED 2 FOOT VAPOR TIGHT, cULUS WET LOCATION RATED, FROSTED LENS       |                                                 |          |         |                      |                     |       |        |     |                  |              |                                                                                       |
| VTF2UZDA140K                                                         | 2 Foot, 24W, LED Vapor Tight, 40K               | 120-277V | 0-10V   | 24                   | 3100                | 130   | 4000   | 80+ | 50,000           | ≥0.9         |    |
| VTF2UZDA150K                                                         | 2 Foot, 24W, LED Vapor Tight, 50K               | 120-277V | 0-10V   | 24                   | 3100                | 130   | 5000   | 80+ | 50,000           | ≥0.9         |                                                                                       |
| LED 4 FOOT VAPOR TIGHT, cULUS WET LOCATION RATED, FROSTED LENS       |                                                 |          |         |                      |                     |       |        |     |                  |              |                                                                                       |
| VTF4UZDA140K                                                         | 4 Foot, 20W, LED Vapor Tight, 40K               | 120-277V | 0-10V   | 20                   | 2600                | 130   | 4000   | 80+ | 50,000           | ≥0.9         |    |
| VTF4UZDA150K                                                         | 4 Foot, 20W, LED Vapor Tight, 50K               | 120-277V | 0-10V   | 20                   | 2600                | 130   | 5000   | 80+ | 50,000           | ≥0.9         |                                                                                       |
| VTF4UZDA240K                                                         | 4 Foot, 40W, LED Vapor Tight, 40K               | 120-277V | 0-10V   | 40                   | 5400                | 135   | 4000   | 80+ | 50,000           | ≥0.9         |                                                                                       |
| VTF4UZDA250K                                                         | 4 Foot, 40W, LED Vapor Tight, 50K               | 120-277V | 0-10V   | 40                   | 5400                | 135   | 5000   | 80+ | 50,000           | ≥0.9         |                                                                                       |
| LED 8 FOOT VAPOR TIGHT, cULUS WET LOCATION RATED, FROSTED LENS       |                                                 |          |         |                      |                     |       |        |     |                  |              |                                                                                       |
| VTF8UZDA140K                                                         | 8 Foot, 65W, LED Vapor Tight, 40K               | 120-277V | 0-10V   | 65                   | 8775                | 135   | 4000   | 80+ | 50,000           | ≥0.9         |   |
| VTF8UZDA150K                                                         | 8 Foot, 65W, LED Vapor Tight, 50K               | 120-277V | 0-10V   | 65                   | 8775                | 135   | 5000   | 80+ | 50,000           | ≥0.9         |                                                                                       |
| 50,000 HOUR LED WRAP LIGHT (CONSULT SPEC SHEET FOR ORDERING MATRIX)  |                                                 |          |         |                      |                     |       |        |     |                  |              |                                                                                       |
| LED WRAP LIGHT, DAMP LOCATION RATED                                  |                                                 |          |         |                      |                     |       |        |     |                  |              |                                                                                       |
| LWR2300135                                                           | 4 Foot, 24W, 0-10V Dimming, LED Wrap Light, 35K | 120-277V | 0-10V   | 24                   | 3500                | 145.8 | 3500   | 80+ | 50,000           | ≥0.9         |  |
| LWR2300140                                                           | 4 Foot, 24W, 0-10V Dimming, LED Wrap Light, 40K | 120-277V | 0-10V   | 24                   | 3500                | 145.8 | 4000   | 80+ | 50,000           | ≥0.9         |                                                                                       |
| LWR2300150                                                           | 4 Foot, 24W, 0-10V Dimming, LED Wrap Light, 50K | 120-277V | 0-10V   | 24                   | 3500                | 145.8 | 5000   | 80+ | 50,000           | ≥0.9         |                                                                                       |
| LWR6300135                                                           | 4 Foot, 63W, 0-10V Dimming, LED Wrap Light, 35K | 120-277V | 0-10V   | 63                   | 7700                | 122.2 | 3500   | 80+ | 50,000           | ≥0.9         |                                                                                       |
| LWR6300140                                                           | 4 Foot, 63W, 0-10V Dimming, LED Wrap Light, 40K | 120-277V | 0-10V   | 63                   | 7900                | 125.4 | 4000   | 80+ | 50,000           | ≥0.9         |                                                                                       |
| LWR6300150                                                           | 4 Foot, 63W, 0-10V Dimming, LED Wrap Light, 50K | 120-277V | 0-10V   | 63                   | 8050                | 127.8 | 5000   | 80+ | 50,000           | ≥0.9         |                                                                                       |

Many items are DLC QPL.  
Visit [www.designlights.org/qpl](http://www.designlights.org/qpl) for a full listing.

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

For the most up-to-date specs and warranty information, please visit [www.tcpi.com](http://www.tcpi.com)



**5 YEAR**  
WARRANTY



Item Number

Item Description

Voltage

Dimming

Wattage<sup>1</sup>Lumens<sup>2</sup>

LPW

CCT(K)

CRI

Rated Life (hrs)

Power Factor

**50,000 HOUR LED GENERAL PURPOSE STRIP / LOW BAY LUMINAIRE (CONSULT SPEC SHEET FOR ORDERING MATRIX)****LED GENERAL PURPOSE STRIPS, DAMP LOCATION RATED**

|                 |                                                        |          |       |    |      |     |      |    |        |      |
|-----------------|--------------------------------------------------------|----------|-------|----|------|-----|------|----|--------|------|
| TCPGPS2UZDA835K | 2 Foot, 20W, 0-10V Dimming, General Purpose Strip, 35K | 120-277V | 0-10V | 20 | 2600 | 130 | 3500 | 80 | 50,000 | ≥0.9 |
| TCPGPS2UZDA840K | 2 Foot, 20W, 0-10V Dimming, General Purpose Strip, 40K | 120-277V | 0-10V | 20 | 2600 | 130 | 4000 | 80 | 50,000 | ≥0.9 |
| TCPGPS2UZDA850K | 2 Foot, 20W, 0-10V Dimming, General Purpose Strip, 50K | 120-277V | 0-10V | 20 | 2600 | 130 | 5000 | 80 | 50,000 | ≥0.9 |
| TCPGPS4UZDA835K | 4 Foot, 32W, 0-10V Dimming, General Purpose Strip, 35K | 120-277V | 0-10V | 32 | 4200 | 130 | 3500 | 80 | 50,000 | ≥0.9 |
| TCPGPS4UZDA840K | 4 Foot, 32W, 0-10V Dimming, General Purpose Strip, 40K | 120-277V | 0-10V | 32 | 4200 | 130 | 4000 | 80 | 50,000 | ≥0.9 |
| TCPGPS4UZDA850K | 4 Foot, 32W, 0-10V Dimming, General Purpose Strip, 50K | 120-277V | 0-10V | 32 | 4200 | 130 | 5000 | 80 | 50,000 | ≥0.9 |
| TCPGPS4UZDB835K | 4 Foot, 18W, 0-10V Dimming, General Purpose Strip, 35K | 120-277V | 0-10V | 18 | 2300 | 130 | 3500 | 80 | 50,000 | ≥0.9 |
| TCPGPS4UZDB840K | 4 Foot, 18W, 0-10V Dimming, General Purpose Strip, 40K | 120-277V | 0-10V | 18 | 2300 | 130 | 4000 | 80 | 50,000 | ≥0.9 |
| TCPGPS4UZDB850K | 4 Foot, 18W, 0-10V Dimming, General Purpose Strip, 50K | 120-277V | 0-10V | 18 | 2300 | 130 | 5000 | 80 | 50,000 | ≥0.9 |
| TCPGPS4HZDA835K | 4 Foot, 32W, 0-10V Dimming, General Purpose Strip, 35K | 120-347V | 0-10V | 32 | 4200 | 130 | 3500 | 80 | 50,000 | ≥0.9 |
| TCPGPS4HZDA840K | 4 Foot, 32W, 0-10V Dimming, General Purpose Strip, 40K | 120-347V | 0-10V | 32 | 4200 | 130 | 4000 | 80 | 50,000 | ≥0.9 |
| TCPGPS4HZDA850K | 4 Foot, 32W, 0-10V Dimming, General Purpose Strip, 50K | 120-347V | 0-10V | 32 | 4200 | 130 | 5000 | 80 | 50,000 | ≥0.9 |
| TCPGPS4UZDE835K | 4 Foot, 40W, 0-10V Dimming, General Purpose Strip, 35K | 120-277V | 0-10V | 40 | 5200 | 130 | 3500 | 80 | 50,000 | ≥0.9 |
| TCPGPS4UZDE840K | 4 Foot, 40W, 0-10V Dimming, General Purpose Strip, 40K | 120-277V | 0-10V | 40 | 5200 | 130 | 4000 | 80 | 50,000 | ≥0.9 |
| TCPGPS4UZDE850K | 4 Foot, 40W, 0-10V Dimming, General Purpose Strip, 50K | 120-277V | 0-10V | 40 | 5200 | 130 | 5000 | 80 | 50,000 | ≥0.9 |
| TCPGPS8UZDA835K | 8 Foot, 65W, 0-10V Dimming, General Purpose Strip, 35K | 120-277V | 0-10V | 65 | 8500 | 130 | 3500 | 80 | 50,000 | ≥0.9 |
| TCPGPS8UZDA840K | 8 Foot, 65W, 0-10V Dimming, General Purpose Strip, 40K | 120-277V | 0-10V | 65 | 8500 | 130 | 4000 | 80 | 50,000 | ≥0.9 |
| TCPGPS8UZDA850K | 8 Foot, 65W, 0-10V Dimming, General Purpose Strip, 50K | 120-277V | 0-10V | 65 | 8500 | 130 | 5000 | 80 | 50,000 | ≥0.9 |
| TCPGPS8UZDB835K | 8 Foot, 38W, 0-10V Dimming, General Purpose Strip, 35K | 120-277V | 0-10V | 38 | 4900 | 130 | 3500 | 80 | 50,000 | ≥0.9 |
| TCPGPS8UZDB840K | 8 Foot, 38W, 0-10V Dimming, General Purpose Strip, 40K | 120-277V | 0-10V | 38 | 4900 | 130 | 4000 | 80 | 50,000 | ≥0.9 |
| TCPGPS8UZDB850K | 8 Foot, 38W, 0-10V Dimming, General Purpose Strip, 50K | 120-277V | 0-10V | 38 | 4900 | 130 | 5000 | 80 | 50,000 | ≥0.9 |
| TCPGPS8HZDA835K | 8 Foot, 65W, 0-10V Dimming, General Purpose Strip, 35K | 120-347V | 0-10V | 65 | 8500 | 130 | 3500 | 80 | 50,000 | ≥0.9 |
| TCPGPS8HZDA840K | 8 Foot, 65W, 0-10V Dimming, General Purpose Strip, 40K | 120-347V | 0-10V | 65 | 8500 | 130 | 4000 | 80 | 50,000 | ≥0.9 |
| TCPGPS8HZDA850K | 8 Foot, 65W, 0-10V Dimming, General Purpose Strip, 50K | 120-347V | 0-10V | 65 | 8500 | 130 | 5000 | 80 | 50,000 | ≥0.9 |
| TCPGPS8UZDE835K | 8 Foot, 75W, 0-10V Dimming, General Purpose Strip, 35K | 120-277V | 0-10V | 75 | 9750 | 130 | 3500 | 80 | 50,000 | ≥0.9 |
| TCPGPS8UZDE840K | 8 Foot, 75W, 0-10V Dimming, General Purpose Strip, 40K | 120-277V | 0-10V | 75 | 9750 | 130 | 4000 | 80 | 50,000 | ≥0.9 |
| TCPGPS8UZDE850K | 8 Foot, 75W, 0-10V Dimming, General Purpose Strip, 50K | 120-277V | 0-10V | 75 | 9750 | 130 | 5000 | 80 | 50,000 | ≥0.9 |

**50,000 HOUR LED GENERAL PURPOSE STRIP RETROFIT KIT (CONSULT SPEC SHEET FOR ORDERING MATRIX)****LED GENERAL PURPOSE STRIP RETROFIT KITS, DAMP LOCATION RATED**

|                 |                                                        |          |       |    |      |     |      |    |        |      |
|-----------------|--------------------------------------------------------|----------|-------|----|------|-----|------|----|--------|------|
| TCPGPR4UZDA835K | 4 Foot, 32W, 0-10V Dimming, GP Strip Retrofit Kit, 35K | 120-277V | 0-10V | 32 | 4200 | 130 | 3500 | 80 | 50,000 | ≥0.9 |
| TCPGPR4UZDA840K | 4 Foot, 32W, 0-10V Dimming, GP Strip Retrofit Kit, 40K | 120-277V | 0-10V | 32 | 4200 | 130 | 4000 | 80 | 50,000 | ≥0.9 |
| TCPGPR4UZDA850K | 4 Foot, 32W, 0-10V Dimming, GP Strip Retrofit Kit, 50K | 120-277V | 0-10V | 32 | 4200 | 130 | 5000 | 80 | 50,000 | ≥0.9 |
| TCPGPR4HZDA835K | 4 Foot, 32W, 0-10V Dimming, GP Strip Retrofit Kit, 35K | 347-480V | 0-10V | 32 | 4200 | 130 | 3500 | 80 | 50,000 | ≥0.9 |
| TCPGPR4HZDA840K | 4 Foot, 32W, 0-10V Dimming, GP Strip Retrofit Kit, 40K | 347-480V | 0-10V | 32 | 4200 | 130 | 4000 | 80 | 50,000 | ≥0.9 |
| TCPGPR4HZDA850K | 4 Foot, 32W, 0-10V Dimming, GP Strip Retrofit Kit, 50K | 347-480V | 0-10V | 32 | 4200 | 130 | 5000 | 80 | 50,000 | ≥0.9 |
| TCPGPR8UZDA835K | 8 Foot, 65W, 0-10V Dimming, GP Strip Retrofit Kit, 35K | 120-277V | 0-10V | 65 | 8500 | 130 | 3500 | 80 | 50,000 | ≥0.9 |
| TCPGPR8UZDA840K | 8 Foot, 65W, 0-10V Dimming, GP Strip Retrofit Kit, 40K | 120-277V | 0-10V | 65 | 8500 | 130 | 4000 | 80 | 50,000 | ≥0.9 |
| TCPGPR8UZDA850K | 8 Foot, 65W, 0-10V Dimming, GP Strip Retrofit Kit, 50K | 120-277V | 0-10V | 65 | 8500 | 130 | 5000 | 80 | 50,000 | ≥0.9 |
| TCPGPR8HZDA835K | 8 Foot, 65W, 0-10V Dimming, GP Strip Retrofit Kit, 35K | 347-480V | 0-10V | 65 | 8500 | 130 | 3500 | 80 | 50,000 | ≥0.9 |
| TCPGPR8HZDA840K | 8 Foot, 65W, 0-10V Dimming, GP Strip Retrofit Kit, 40K | 347-480V | 0-10V | 65 | 8500 | 130 | 4000 | 80 | 50,000 | ≥0.9 |
| TCPGPR8HZDA850K | 8 Foot, 65W, 0-10V Dimming, GP Strip Retrofit Kit, 50K | 347-480V | 0-10V | 65 | 8500 | 130 | 5000 | 80 | 50,000 | ≥0.9 |
| TCPGPR4UZDB840K | 4 Foot, 18W, 0-10V Dimming, GP Strip Retrofit Kit, 40K | 120-277V | 0-10V | 18 | 2300 | 130 | 4000 | 80 | 50,000 | ≥0.9 |
| TCPGPR4UZDB850K | 4 Foot, 18W, 0-10V Dimming, GP Strip Retrofit Kit, 50K | 120-277V | 0-10V | 18 | 2300 | 130 | 5000 | 80 | 50,000 | ≥0.9 |
| TCPGPR8UZDB840K | 8 Foot, 38W, 0-10V Dimming, GP Strip Retrofit Kit, 40K | 120-277V | 0-10V | 38 | 4900 | 130 | 4000 | 80 | 50,000 | ≥0.9 |
| TCPGPR8UZDB850K | 8 Foot, 38W, 0-10V Dimming, GP Strip Retrofit Kit, 50K | 120-277V | 0-10V | 38 | 4900 | 130 | 5000 | 80 | 50,000 | ≥0.9 |

| Item Number                                                                  | Item Description                                                             | Wattage/Lumens        |                       |                       | Wattage/LPW              |                          |                          | CCT(K)                  | CRI | Rated Life (hrs) |     |
|------------------------------------------------------------------------------|------------------------------------------------------------------------------|-----------------------|-----------------------|-----------------------|--------------------------|--------------------------|--------------------------|-------------------------|-----|------------------|---------------------------------------------------------------------------------------|
|                                                                              |                                                                              | LW                    | MW                    | HW                    | LW                       | MW                       | HW                       |                         |     |                  |                                                                                       |
| 50,000 HOUR LED WATTAGE SELECTABLE COMMERCIAL DOWNLIGHTS                     |                                                                              |                       |                       |                       |                          |                          |                          |                         |     |                  |                                                                                       |
| 7/9/12W 4" LED WATTAGE SELECTABLE COMMERCIAL DOWNLIGHT (65W REPLACEMENT)     |                                                                              |                       |                       |                       |                          |                          |                          |                         |     |                  |                                                                                       |
| DLC4SWUZDCCT                                                                 | Round Commercial Downlight, 120-277V, 7/9/12W, 0-10V Dimming                 | 7W<br>675/695/690     | 9W<br>870/900/895     | 12W<br>1150/1200/1190 | 7W<br>96.4/99.3/98.6     | 9W<br>96.7/100/99.4      | 12W<br>95.8/100/99       | 3000K<br>3500K<br>4100K | 80  | 50,000           |    |
| DLC4SWUZDCCT2                                                                | Round Commercial Downlight, 120-277V, 7/9/12W, 0-10V Dimming                 | 7W<br>700/750         | 9W<br>900/1000        | 12W<br>1200/1300      | 7W<br>100/107.1          | 9W<br>100/111.1          | 12W<br>100/108.3         | 2700K<br>5000K          | 80  | 50,000           |                                                                                       |
| DLC4SWUZDLCCT                                                                | Round Commercial Downlight, Lens Version, 120-277V, 7/9/12W, 0-10V Dimming   | 7W<br>743/765/759     | 9W<br>957/990/985     | 12W<br>1265/1320/1309 | 7W<br>106.1/109.2/108.4  | 9W<br>106.3/110/109.4    | 12W<br>105.4/110/109.1   | 3000K<br>3500K<br>4100K | 80  | 50,000           |                                                                                       |
| DLC4SWUZDLCCT2                                                               | Round Commercial Downlight, Lens Version, 120-277V, 7/9/12W, 0-10V Dimming   | 7W<br>700/750         | 9W<br>990/950         | 12W<br>1250/1300      | 7W<br>100/107.1          | 9W<br>100/105.6          | 12W<br>104.2/108.3       | 2700K<br>5000K          | 80  | 50,000           |                                                                                       |
| 8/10/15W 6" LED WATTAGE SELECTABLE COMMERCIAL DOWNLIGHT (85W REPLACEMENT)    |                                                                              |                       |                       |                       |                          |                          |                          |                         |     |                  |                                                                                       |
| DLC6SWUZDCCT                                                                 | Round Commercial Downlight, 120-277V, 8/10/15W, 0-10V Dimming                | 8W<br>820/850/865     | 10W<br>1030/1080/1095 | 15W<br>1430/1530/1515 | 8W<br>103/106/108        | 10W<br>103/108/110       | 15W<br>95/102/101        | 3000K<br>3500K<br>4100K | 80  | 50,000           |    |
| DLC6SWUZDCCT2                                                                | Round Commercial Downlight, 120-277V, 8/10/15W, 0-10V Dimming                | 8W<br>700/750         | 10W<br>1000/1050      | 15W<br>1450/1500      | 8W<br>87.5/93.8          | 10W<br>100/105           | 15W<br>96.7/100          | 2700K<br>5000K          | 80  | 50,000           |                                                                                       |
| DLC6SWUZDLCCT                                                                | Round Commercial Downlight, Lens Version, 120-277V, 8/10/15W, 0-10V Dimming  | 8W<br>902/935/952     | 10W<br>1133/1188/1205 | 15W<br>1573/1683/1667 | 8W<br>112.8/116.9/118.9  | 10W<br>113.3/118.8/120.5 | 15W<br>104.9/112.2/111.1 | 3000K<br>3500K<br>4100K | 80  | 50,000           |                                                                                       |
| DLC6SWUZDLCCT2                                                               | Round Commercial Downlight, Lens Version, 120-277V, 8/10/15W, 0-10V Dimming  | 8W<br>900/950         | 10W<br>1200/1300      | 15W<br>1600/1650      | 8W<br>112.5/118.8        | 10W<br>120/130           | 15W<br>106.7/110         | 2700K<br>5000K          | 80  | 50,000           |                                                                                       |
| 11/15/19W 8" LED WATTAGE SELECTABLE COMMERCIAL DOWNLIGHT (85W REPLACEMENT)   |                                                                              |                       |                       |                       |                          |                          |                          |                         |     |                  |                                                                                       |
| DLC8SWUZDCCT                                                                 | Round Commercial Downlight, 120-277V, 11/15/19W, 0-10V Dimming               | 11W<br>1270/1300/1305 | 15W<br>1720/1705/1775 | 19W<br>2085/2150/2085 | 11W<br>115.5/118.2/119   | 15W<br>115/113.7/118.3   | 19W<br>110/113.2/110     | 3000K<br>3500K<br>4100K | 80  | 50,000           |   |
| DLC8SWUZDCCT2                                                                | Round Commercial Downlight, 120-277V, 11/15/19W, 0-10V Dimming               | 11W<br>1200/1300      | 15W<br>1600/1650      | 19W<br>2000/2050      | 11W<br>109.1/118.2       | 15W<br>106.7/110         | 19W<br>105.3/107.9       | 2700K<br>5000K          | 80  | 50,000           |                                                                                       |
| DLC8SWUZDLCCT                                                                | Round Commercial Downlight, Lens Version, 120-277V, 11/15/19W, 0-10V Dimming | 11W<br>1397/1430/1436 | 15W<br>1892/1876/1953 | 19W<br>2294/2365/2294 | 11W<br>127/130/130.5     | 15W<br>126.1/125/130.2   | 19W<br>120.7/124.5/120.7 | 3000K<br>3500K<br>4100K | 80  | 50,000           |                                                                                       |
| DLC8SWUZDLCCT2                                                               | Round Commercial Downlight, Lens Version, 120-277V, 11/15/19W, 0-10V Dimming | 11W<br>1400/1500      | 15W<br>1800/1900      | 19W<br>2300/2400      | 11W<br>127.3/136.4       | 15W<br>120/126.7         | 19W<br>121/126.3         | 2700K<br>5000K          | 80  | 50,000           |                                                                                       |
| 18/23/30W 10" LED WATTAGE SELECTABLE COMMERCIAL DOWNLIGHT (125W REPLACEMENT) |                                                                              |                       |                       |                       |                          |                          |                          |                         |     |                  |                                                                                       |
| DLC10SWUZDCCT                                                                | Round Commercial Downlight, 120-277V, 18/23/30W, 0-10V Dimming               | 18W<br>2100/2150/2150 | 23W<br>2590/2660/2660 | 30W<br>3205/3330/3305 | 18W<br>116.7/119.4/119.4 | 23W<br>112.6/115.7/115.7 | 30W<br>106.8/111/110.2   | 3000K<br>3500K<br>4100K | 80  | 50,000           |  |
| DLC10SWUZDCCT2                                                               | Round Commercial Downlight, 120-277V, 18/23/30W, 0-10V Dimming               | 18W<br>1800/1850      | 23W<br>2250/2300      | 30W<br>2850/2950      | 18W<br>100/102.8         | 23W<br>97.8/100          | 30W<br>95/98.3           | 2700K<br>5000K          | 80  | 50,000           |                                                                                       |
| DLC10SWUZDLCCT                                                               | Round Commercial Downlight, Lens Version, 120-277V, 18/23/30W, 0-10V Dimming | 18W<br>2310/2365/2365 | 23W<br>2849/2926/2926 | 30W<br>3526/3663/3636 | 18W<br>128.3/131.4/131.4 | 23W<br>123.9/127.2/127.2 | 30W<br>117.5/122.1/121.1 | 3000K<br>3500K<br>4100K | 80  | 50,000           |                                                                                       |
| DLC10SWUZDLCCT2                                                              | Round Commercial Downlight, Lens Version, 120-277V, 18/23/30W, 0-10V Dimming | 18W<br>1950/2150      | 23W<br>2500/2650      | 30W<br>3250/3500      | 18W<br>108.3/119.4       | 23W<br>108.7/115.2       | 30W<br>108.3/116.7       | 2700K<br>5000K          | 80  | 50,000           |                                                                                       |
| 18/23/30W 12" LED WATTAGE SELECTABLE COMMERCIAL DOWNLIGHT (125W REPLACEMENT) |                                                                              |                       |                       |                       |                          |                          |                          |                         |     |                  |                                                                                       |
| DLC12SWUZDCCT                                                                | Round Commercial Downlight, 120-277V, 18/23/30W, 0-10V Dimming               | 18W<br>2110/2160/2180 | 23W<br>2650/2690/2690 | 30W<br>3260/3380/3360 | 18W<br>117.2/120/121.1   | 23W<br>115.2/117/117     | 30W<br>108.7/112.7/112   | 3000K<br>3500K<br>4100K | 80  | 50,000           |  |
| DLC12SWUZDCCT2                                                               | Round Commercial Downlight, 120-277V, 18/23/30W, 0-10V Dimming               | 18W<br>1800/1850      | 23W<br>2250/2300      | 30W<br>2850/2950      | 18W<br>100/102.8         | 23W<br>97.8/100          | 30W<br>95/98.3           | 2700K<br>5000K          | 80  | 50,000           |                                                                                       |
| DLC12SWUZDLCCT                                                               | Round Commercial Downlight, Lens Version, 120-277V, 18/23/30W, 0-10V Dimming | 18W<br>2321/2376/2398 | 23W<br>2915/2959/2959 | 30W<br>3586/3718/3696 | 18W<br>128.9/132/133.2   | 23W<br>126.7/128.7/128.7 | 30W<br>119.5/123.9/123.2 | 3000K<br>3500K<br>4100K | 80  | 50,000           |                                                                                       |
| DLC12SWUZDLCCT2                                                              | Round Commercial Downlight, Lens Version, 120-277V, 18/23/30W, 0-10V Dimming | 18W<br>1950/2150      | 23W<br>2500/2700      | 30W<br>3250/3500      | 18W<br>108.3/119.4       | 23W<br>108.7/117.4       | 30W<br>108.3/116.7       | 2700K<br>5000K          | 80  | 50,000           |                                                                                       |

Many items are ENERGY STAR® qualified.  
Visit [energystar.gov](http://energystar.gov) for a full listing

<sup>1</sup> Actual wattage may vary by +/- 10%.

<sup>2</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

For the most up-to-date specs and warranty information, please visit [www.tcp.com](http://www.tcp.com)



**5 YEAR**  
WARRANTY

| Item Number | Item Description | CCT/Wattage/<br>Lumens |    |    | CCT/Wattage/<br>LPW |    |    | CCT (K) | CRI | Rated Life (hrs) |
|-------------|------------------|------------------------|----|----|---------------------|----|----|---------|-----|------------------|
|             |                  | LW                     | MW | HW | LW                  | MW | HW |         |     |                  |

## 50,000 HOUR LED FLAT SELECTABLE RECESSED DOWNLIGHTS

### 5/6" LED FLAT SELECTABLE RECESSED DOWNLIGHT



|               |                                                                                           |                          |                              |                              |                         |                          |                          |                         |    |        |
|---------------|-------------------------------------------------------------------------------------------|--------------------------|------------------------------|------------------------------|-------------------------|--------------------------|--------------------------|-------------------------|----|--------|
| LEDWSDR56CCT1 | 5/6" Flat Selectable Recessed Downlight, 120-277V, 8/10.5/14.5W, 24/27/30K, Triac Dimming | 8W<br>24K/27K/30K<br>850 | 10.5W<br>24K/27K/30K<br>1100 | 14.5W<br>24K/27K/30K<br>1400 | 8W<br>24K/27K/30K<br>90 | 11W<br>24K/27K/30K<br>90 | 11W<br>24K/27K/30K<br>90 | 2400K<br>2700K<br>3000K | 80 | 50,000 |
| LEDWSDR56CCT2 | 5/6" Flat Selectable Recessed Downlight, 120-277V, 8/10.5/14.5W, 30/40/50K, Triac Dimming | 8W<br>30K/40K/50K<br>850 | 10.5W<br>30K/40K/50K<br>1100 | 14.5W<br>30K/40K/50K<br>1400 | 8W<br>30K/40K/50K<br>90 | 11W<br>30K/40K/50K<br>90 | 11W<br>30K/40K/50K<br>90 | 3000K<br>4000K<br>5000K | 80 | 50,000 |

## 35,000 HOUR LED BEVELED DESIGNER LOOK RECESSED DOWNLIGHTS

### 4" and 5/6" LED BEVELED SELECTABLE RECESSED DOWNLIGHT



|             |                                                                              |                     |                     |                     |   |   |   |                         |    |        |
|-------------|------------------------------------------------------------------------------|---------------------|---------------------|---------------------|---|---|---|-------------------------|----|--------|
| L75DR4DCCT1 | 4" Beveled Color Selectable Recessed Downlight, 120-277V, 10W, 0-10V Dimming | 10W<br>2400K<br>765 | 10W<br>2700K<br>850 | 10W<br>3000K<br>850 | - | - | - | 2400K<br>2700K<br>3000K | 80 | 50,000 |
| L75DR4DCCT2 | 4" Beveled Color Selectable Recessed Downlight, 120-277V, 11W, 0-10V Dimming | 11W<br>3000K<br>900 | 11W<br>4000K<br>960 | 11W<br>5000K<br>915 | - | - | - | 3000K<br>4000K<br>5000K | 80 | 50,000 |



|               |                                                                                                  |                                  |                                        |                                        |                                       |                                           |                                        |                         |    |        |
|---------------|--------------------------------------------------------------------------------------------------|----------------------------------|----------------------------------------|----------------------------------------|---------------------------------------|-------------------------------------------|----------------------------------------|-------------------------|----|--------|
| L120DR56DCCT1 | 5/6" Beveled Color/Wattage Selectable, Recessed Downlight, 120-277V, 8/10.5/14.5W, 0-10V Dimming | 8W<br>24K/27K/30K<br>765/850/850 | 10.5W<br>24K/27K/30K<br>1000/1100/1100 | 14.5W<br>24K/27K/30K<br>1260/1400/1400 | 8W<br>24K/27K/30K<br>95.6/106.3/106.3 | 10.5W<br>24K/27K/30K<br>95.2/104.8/104.8  | 14.5W<br>24K/27K/30K<br>86.9/96.6/96.6 | 2400K<br>2700K<br>3000K | 80 | 50,000 |
| L120DR56DCCT2 | 5/6" Beveled Color/Wattage Selectable, Recessed Downlight, 120-277V, 8/10.5/14.5W, 0-10V Dimming | 8W<br>30K/40K/50K<br>910/945/920 | 10.5W<br>30K/40K/50K<br>1100/1160/1120 | 14.5W<br>30K/40K/50K<br>1450/1370/1490 | 8W<br>30K/40K/50K<br>113.8/118.1/115  | 10.5W<br>30K/40K/50K<br>104.8/110.5/106.7 | 14.5W<br>30K/40K/50K<br>100/94.5/102.8 | 3000K<br>4000K<br>5000K | 80 | 50,000 |

| Item Number | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CCT | Beam Angle | CRI | Case Quantity |
|-------------|------------------|---------|------------|--------------------|--------|-----------------|-----|------------|-----|---------------|
|-------------|------------------|---------|------------|--------------------|--------|-----------------|-----|------------|-----|---------------|

## 50,000 HOUR RECESSED LED COLOR SELECTABLE SNAP-IN DOWNLIGHTS

### 4" LED COLOR SELECTABLE SNAP-IN DOWNLIGHT



|         |                           |           |    |     |     |    |                         |     |    |   |
|---------|---------------------------|-----------|----|-----|-----|----|-------------------------|-----|----|---|
| DR4CCT1 | 4" Snap-In DownLight CCT1 | 120v-277v | 13 | 75W | 850 | 65 | 2400K<br>2700K<br>3000K | 120 | 80 | 6 |
| DR4CCT2 | 4" Snap-In DownLight CCT2 | 120v-277v | 13 | 75W | 850 | 65 | 3000K<br>3500K<br>4100K | 120 | 80 | 6 |

### 6" LED COLOR SELECTABLE SNAP-IN DOWNLIGHT



|         |                           |           |    |     |      |    |                         |     |    |   |
|---------|---------------------------|-----------|----|-----|------|----|-------------------------|-----|----|---|
| DR6CCT1 | 6" Snap-In DownLight CCT1 | 120v-277v | 14 | 85W | 1100 | 78 | 2400K<br>2700K<br>3000K | 120 | 80 | 6 |
| DR6CCT2 | 6" Snap-In DownLight CCT2 | 120v-277v | 14 | 85W | 1100 | 78 | 3000K<br>3500K<br>4100K | 120 | 80 | 6 |

## 40,000 HOUR LED COLOR SELECTABLE EDGE-LIT SNAP-IN DOWNLIGHTS

### 4" LED COLOR SELECTABLE EDGE-LIT SNAP-IN DOWNLIGHT



|            |                                    |           |    |     |             |                    |                         |     |    |   |
|------------|------------------------------------|-----------|----|-----|-------------|--------------------|-------------------------|-----|----|---|
| L9EL4DCCT1 | 4" Edge-Lit Snap-In DownLight CCT1 | 120v-277v | 11 | 40W | 765/850/850 | 69.5/77.3/<br>77.3 | 2400K<br>2700K<br>3000K | 120 | 80 | 6 |
| L9EL4DCCT2 | 4" Edge-Lit Snap-In DownLight CCT2 | 120v-277v | 11 | 40W | 835/882/868 | 75.9/80.2/<br>78.9 | 3000K<br>4000K<br>5000K | 120 | 80 | 6 |

### 6" LED COLOR SELECTABLE EDGE-LIT SNAP-IN DOWNLIGHT



|             |                                    |           |    |     |                    |                    |                         |     |    |   |
|-------------|------------------------------------|-----------|----|-----|--------------------|--------------------|-------------------------|-----|----|---|
| L12EL6DCCT1 | 6" Edge-Lit Snap-In DownLight CCT1 | 120v-277v | 14 | 60W | 900/1000/<br>1000  | 64.3/71.2/<br>71.2 | 2400K<br>2700K<br>3000K | 120 | 80 | 6 |
| L12EL6DCCT2 | 6" Edge-Lit Snap-In DownLight CCT2 | 120v-277v | 14 | 60W | 1060/1150/<br>1130 | 75.9/80.2/<br>78.9 | 3000K<br>4000K<br>5000K | 120 | 80 | 6 |

10

| Item Number | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CCT | Beam Angle | CRI | Case Quantity |
|-------------|------------------|---------|------------|--------------------|--------|-----------------|-----|------------|-----|---------------|
|-------------|------------------|---------|------------|--------------------|--------|-----------------|-----|------------|-----|---------------|

### 35,000 HOUR LED HI CRI RECESSED DOWNLIGHTS

#### 9W 4" LED HI CRI RECESSED DOWNLIGHTS (50W REPLACEMENT)

|               |                                             |     |   |     |     |      |       |     |    |   |
|---------------|---------------------------------------------|-----|---|-----|-----|------|-------|-----|----|---|
| L9DR4D3527K95 | LED 9W 4" Hi CRI Recessed Downlight - 2700K | 120 | 9 | 50W | 550 | 61.1 | 2700K | 120 | 90 | 6 |
| L9DR4D3530K95 | LED 9W 4" Hi CRI Recessed Downlight - 3000K | 120 | 9 | 50W | 600 | 66.7 | 3000K | 120 | 90 | 6 |



#### 12W 5/6" LED HI CRI RECESSED DOWNLIGHTS (65W REPLACEMENT)

|                 |                                                  |     |    |     |     |      |       |     |    |   |
|-----------------|--------------------------------------------------|-----|----|-----|-----|------|-------|-----|----|---|
| L11DR56D3527K95 | LED 11W 5 5/8" Hi CRI Recessed Downlight - 2700K | 120 | 11 | 65W | 700 | 63.6 | 2700K | 120 | 90 | 6 |
| L11DR56D3530K95 | LED 11W 5 5/8" Hi CRI Recessed Downlight - 3000K | 120 | 11 | 65W | 750 | 68.2 | 3000K | 120 | 90 | 6 |



### 50,000 HOUR LED DIMMABLE JUNCTION BOX DOWNLIGHTS

#### 11W 5/6" LED DIMMABLE JUNCTION BOX DOWNLIGHTS (75W REPLACEMENT)

|           |                                                  |     |    |     |      |     |       |     |    |   |
|-----------|--------------------------------------------------|-----|----|-----|------|-----|-------|-----|----|---|
| SDL61D27K | LED 11W 5/6" Junction Box Disc Downlight - 2700K | 120 | 11 | 75W | 1100 | 100 | 2700K | 120 | 80 | 6 |
| SDL61D30K | LED 11W 5/6" Junction Box Disc Downlight - 3000K | 120 | 11 | 75W | 1100 | 100 | 3000K | 120 | 80 | 6 |
| SDL61D41K | LED 11W 5/6" Junction Box Disc Downlight - 4100K | 120 | 11 | 75W | 1100 | 100 | 4100K | 120 | 80 | 6 |
| SDL61D50K | LED 11W 5/6" Junction Box Disc Downlight - 5000K | 120 | 11 | 75W | 1100 | 100 | 5000K | 120 | 80 | 6 |



### 40,000 HOUR LED DELUX SERIES ROUND SNAP-IN DOWNLIGHTS

#### 14W 6" LED DELUX SERIES ROUND SNAP-IN DOWNLIGHTS (85W REPLACEMENT)

|           |                                            |     |    |     |      |    |       |     |    |   |
|-----------|--------------------------------------------|-----|----|-----|------|----|-------|-----|----|---|
| DDC61D27K | LED 14W 6" Round Snap-In Downlight - 2700K | 120 | 14 | 85W | 1100 | 78 | 2700K | 110 | 80 | 6 |
| DDC61D30K | LED 14W 6" Round Snap-In Downlight - 3000K | 120 | 14 | 85W | 1100 | 78 | 3000K | 110 | 80 | 6 |
| DDC61D35K | LED 14W 6" Round Snap-In Downlight - 3500K | 120 | 14 | 85W | 1100 | 78 | 3500K | 110 | 80 | 6 |
| DDC61D41K | LED 14W 6" Round Snap-In Downlight - 4100K | 120 | 14 | 85W | 1100 | 78 | 4100K | 110 | 80 | 6 |
| DDC61D50K | LED 14W 6" Round Snap-In Downlight - 5000K | 120 | 14 | 85W | 1100 | 78 | 5000K | 110 | 80 | 6 |



#### 6" LED DELUX SERIES ROUND SNAP-IN DOWNLIGHT TRIM RINGS

|        |                           |    |
|--------|---------------------------|----|
| TR6BLK | Black 6" Trim Ring        | 20 |
| TR6WHT | White 6" Trim Ring        | 20 |
| TR6AGD | Antique Gold 6" Trim Ring | 20 |
| TR6SLV | Silver 6" Trim Ring       | 20 |
| TR6RGD | Rose Gold 6" Trim Ring    | 20 |



Item Number

Item Description

Voltage

Lamp Watts

Wattage Equivalent

Lumens

Lumens Per Watt

CCT

Beam Angle

CRI

Case Quantity

### 35,000 HOUR RECESSED LED DOWNLIGHTS

#### 10W 4" RECESSED DOWNLIGHTS (75W REPLACEMENT)



LED10DR430K

LED 10W 4" Recessed Downlight - 3000K

120

10

75W

750

75

3000K

120

80

6

#### 12W 5/6" RECESSED DOWNLIGHTS (120W REPLACEMENT)



LED14DR5630K

LED 12W 5/6" Recessed Downlight - 3000K

120

12

120W

1300

108.3

3000K

120

80

6

### 40,000 HOUR LED SQUARE SNAP-IN DOWNLIGHTS

#### 13W 4" LED SQUARE SNAP-IN DOWNLIGHTS (60W REPLACEMENT)



DDR40227

LED 13W 4" Square Snap-In Downlight - 2700K

120

13

75W

750

57.7

2700K

110

80

6

DDR40230

LED 13W 4" Square Snap-In Downlight - 3000K

120

13

75W

750

57.7

3000K

110

80

6

DDR40240

LED 13W 4" Square Snap-In Downlight - 4000K

120

13

75W

750

57.7

4000K

110

80

6

DDR40250

LED 13W 4" Square Snap-In Downlight - 5000K

120

13

75W

750

57.7

5000K

110

80

6

#### 14W 6" LED SQUARE SNAP-IN DOWNLIGHTS (75W REPLACEMENT)



DDR60227

LED 14W 6" Square Snap-In Downlight - 2700K

120

14

85W

1000

71.4

2700K

110

80

6

DDR60230

LED 14W 6" Square Snap-In Downlight - 3000K

120

14

85W

1000

71.4

3000K

110

80

6

DDR60240

LED 14W 6" Square Snap-In Downlight - 4000K

120

14

85W

1000

71.4

4000K

110

80

6

DDR60250

LED 14W 6" Square Snap-In Downlight - 5000K

120

14

85W

1000

71.4

5000K

110

80

6

#### 18W 8" LED SQUARE SNAP-IN DOWNLIGHTS (100W REPLACEMENT)



DDR80227

LED 18W 8" Square Snap-In Downlight - 2700K

120

18

125W

1400

77.8

2700K

110

80

6

DDR80230

LED 18W 8" Square Snap-In Downlight - 3000K

120

18

125W

1400

77.8

3000K

110

80

6

DDR80240

LED 18W 8" Square Snap-In Downlight - 4000K

120

18

125W

1400

77.8

4000K

110

80

6

DDR80250

LED 18W 8" Square Snap-In Downlight - 5000K

120

18

125W

1400

77.8

5000K

110

80

6

| Item Number | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CCT | Beam Angle | CRI | Case Quantity |
|-------------|------------------|---------|------------|--------------------|--------|-----------------|-----|------------|-----|---------------|
|-------------|------------------|---------|------------|--------------------|--------|-----------------|-----|------------|-----|---------------|

## 40,000 HOUR LED ROUND SNAP-IN DOWNLIGHTS

### 13W 4" LED ROUND SNAP-IN DOWNLIGHTS (60W REPLACEMENT)

|          |                                            |     |    |     |     |      |       |     |    |   |
|----------|--------------------------------------------|-----|----|-----|-----|------|-------|-----|----|---|
| DDR40127 | LED 13W 4" Round Snap-In Downlight - 2700K | 120 | 13 | 75W | 850 | 65.4 | 2700K | 110 | 80 | 6 |
| DDR40130 | LED 13W 4" Round Snap-In Downlight - 3000K | 120 | 13 | 75W | 850 | 65.4 | 3000K | 110 | 80 | 6 |
| DDR40140 | LED 13W 4" Round Snap-In Downlight - 4000K | 120 | 13 | 75W | 850 | 65.4 | 4000K | 110 | 80 | 6 |
| DDR40150 | LED 13W 4" Round Snap-In Downlight - 5000K | 120 | 13 | 75W | 850 | 65.4 | 5000K | 110 | 80 | 6 |



### 14W 6" LED ROUND SNAP-IN DOWNLIGHTS (75W REPLACEMENT)

|          |                                            |     |    |     |      |      |       |     |    |   |
|----------|--------------------------------------------|-----|----|-----|------|------|-------|-----|----|---|
| DDR60127 | LED 14W 6" Round Snap-In Downlight - 2700K | 120 | 14 | 85W | 1100 | 78.6 | 2700K | 110 | 80 | 6 |
| DDR60130 | LED 14W 6" Round Snap-In Downlight - 3000K | 120 | 14 | 85W | 1100 | 78.6 | 3000K | 110 | 80 | 6 |
| DDR60140 | LED 14W 6" Round Snap-In Downlight - 4000K | 120 | 14 | 85W | 1100 | 78.6 | 4000K | 110 | 80 | 6 |
| DDR60150 | LED 14W 6" Round Snap-In Downlight - 5000K | 120 | 14 | 85W | 1100 | 78.6 | 5000K | 110 | 80 | 6 |



### 18W 8" LED ROUND SNAP-IN DOWNLIGHTS (100W REPLACEMENT)

|          |                                            |     |    |      |      |      |       |     |    |   |
|----------|--------------------------------------------|-----|----|------|------|------|-------|-----|----|---|
| DDR80127 | LED 18W 8" Round Snap-In Downlight - 2700K | 120 | 18 | 125W | 1550 | 86.1 | 2700K | 110 | 80 | 6 |
| DDR80130 | LED 18W 8" Round Snap-In Downlight - 3000K | 120 | 18 | 125W | 1550 | 86.1 | 3000K | 110 | 80 | 6 |
| DDR80140 | LED 18W 8" Round Snap-In Downlight - 4000K | 120 | 18 | 125W | 1550 | 86.1 | 4000K | 110 | 80 | 6 |
| DDR80150 | LED 18W 8" Round Snap-In Downlight - 5000K | 120 | 18 | 125W | 1550 | 86.1 | 5000K | 110 | 80 | 6 |



### 25,000 HOUR ALLUSION LED 10W 5/6" RECESSED DOWNLIGHTS WITH SMOOTH WARM DIMMING

|             |                               |     |    |     |      |     |                |     |    |   |
|-------------|-------------------------------|-----|----|-----|------|-----|----------------|-----|----|---|
| LED10DR56DA | 10W 5 5/8" Recessed Downlight | 120 | 11 | 65W | 1100 | 100 | 3000K to 2000K | 120 | 80 | 6 |
|-------------|-------------------------------|-----|----|-----|------|-----|----------------|-----|----|---|



# OUTDOOR LED LUMINAIRES

Outdoor LED Luminaires include TCP's numerous types of wall packs, area, canopy and flood lighting, barn lights and security lighting.

All are wet location rated and perfect for a variety of different applications ranging from site lighting, security lighting, pathways, parking lots, perimeters and facades.



# OUTDOOR LED LUMINAIRES



| Item Number                                    | Item Description                                                          | LW                         | CCT/Wattage/<br>Lumens<br>MW | HW                         | LPW | CCT(K)                  | CRI | Rated Life (hrs) |
|------------------------------------------------|---------------------------------------------------------------------------|----------------------------|------------------------------|----------------------------|-----|-------------------------|-----|------------------|
| ELEMENTS LED SELECT SERIES WALL PACK           |                                                                           |                            |                              |                            |     |                         |     |                  |
| LED SELECT SERIES WALL PACK WET LOCATION RATED |                                                                           |                            |                              |                            |     |                         |     |                  |
| TWPUZDB1CCT                                    | LED Wall Pack, 120-277V,<br>0-10 Dimming, 35/45/55W,<br>2950K/4000K/5000K | 35W<br>29K/40K/50K<br>4725 | 45W<br>29K/40K/50K<br>6075   | 55W<br>29K/40K/50K<br>7425 | 135 | 2950K<br>4000K<br>5000K | 80  | 50,000           |
| TWPUZDB2CCT                                    | LED Wall Pack, 120-277V,<br>0-10 Dimming, 115W,<br>2950K/4000K/5000K      | —                          | 115W<br>29K/40K/50K<br>15525 | —                          | 135 | 2950K<br>4000K<br>5000K | 80  | 50,000           |



Element



Elements  
by TCP

| Item Number                                                | Item Description                                                              | Voltage  | Dimming | Wattage <sup>1</sup> | Lumens <sup>2</sup> | LPW   | CCT(K) | CRI | Rated Life (hrs) | Controls      | Finish |
|------------------------------------------------------------|-------------------------------------------------------------------------------|----------|---------|----------------------|---------------------|-------|--------|-----|------------------|---------------|--------|
| ELEMENTS LED WALL PACK                                     |                                                                               |          |         |                      |                     |       |        |     |                  |               |        |
| LED NON-CUTOFF WALL PACKS, ACRYLIC LENS WET LOCATION RATED |                                                                               |          |         |                      |                     |       |        |     |                  |               |        |
| WP5500140                                                  | Non-Cutoff Wall Pack, Universal, Non-Dimmable, 4000K                          | 120-277V | --      | 55                   | 6900                | 125.5 | 4000K  | 80  | 50,000           | –             | Bronze |
| WP5500150                                                  | Non-Cutoff Wall Pack, Universal, Non-Dimmable, 5000K                          | 120-277V | --      | 55                   | 6900                | 125.5 | 5000K  | 80  | 50,000           | –             | Bronze |
| WP5500140PC                                                | Non-Cutoff Wall Pack, Universal, Non-Dimmable, 4000K, Photocell               | 120-277V | --      | 55                   | 6900                | 125.5 | 4000K  | 80  | 50,000           | Photocell     | Bronze |
| WP5500150PC                                                | Non-Cutoff Wall Pack, Universal, Non-Dimmable, 5000K, Photocell               | 120-277V | --      | 55                   | 6900                | 125.5 | 5000K  | 80  | 50,000           | Photocell     | Bronze |
| WP5500140MS                                                | Non-Cutoff Wall Pack, Universal, Non-Dimmable, 4000K, Motion Sensor           | 120-277V | --      | 55                   | 6900                | 125.5 | 4000K  | 80  | 50,000           | Motion Sensor | Bronze |
| WP5500150MS                                                | Non-Cutoff Wall Pack, Universal, Non-Dimmable, 5000K, Motion Sensor           | 120-277V | --      | 55                   | 6900                | 125.5 | 5000K  | 80  | 50,000           | Motion Sensor | Bronze |
| WP12000140                                                 | Non-Cutoff Wall Pack, Universal, Non-Dimmable, 4000K                          | 120-277V | --      | 120                  | 14500               | 120.8 | 4000K  | 80  | 50,000           | –             | Bronze |
| WP12000150                                                 | Non-Cutoff Wall Pack, Universal, Non-Dimmable, 5000K                          | 120-277V | --      | 120                  | 14500               | 120.8 | 5000K  | 80  | 50,000           | –             | Bronze |
| WP12000140PC                                               | Non-Cutoff Wall Pack, Universal, Non-Dimmable, 4000K, Photocell               | 120-277V | --      | 120                  | 14500               | 120.8 | 4000K  | 80  | 50,000           | Photocell     | Bronze |
| WP12000150PC                                               | Non-Cutoff Wall Pack, Universal, Non-Dimmable, 5000K, Photocell               | 120-277V | --      | 120                  | 14500               | 120.8 | 5000K  | 80  | 50,000           | Photocell     | Bronze |
| WP12000140MS                                               | Non-Cutoff Wall Pack, Universal, Non-Dimmable, 4000K, Microwave Motion Sensor | 120-277V | --      | 120                  | 14500               | 120.8 | 4000K  | 80  | 50,000           | Motion Sensor | Bronze |
| WP12000150MS                                               | Non-Cutoff Wall Pack, Universal, Non-Dimmable, 5000K, Microwave Motion Sensor | 120-277V | --      | 120                  | 14500               | 120.8 | 5000K  | 80  | 50,000           | Motion Sensor | Bronze |



Elements  
by PCE



Elements  
by TCP

|                                                    |                                                       |          |       |    |      |       |       |    |        |           |        |
|----------------------------------------------------|-------------------------------------------------------|----------|-------|----|------|-------|-------|----|--------|-----------|--------|
| <b>ELEMENTS LED ADJUSTABLE WALL PACK</b>           |                                                       |          |       |    |      |       |       |    |        |           |        |
| <b>LED ADJUSTABLE WALL PACK WET LOCATION RATED</b> |                                                       |          |       |    |      |       |       |    |        |           |        |
| FCWUZDA1T340KBRPC                                  | Wall Pack, 120-277V, 0-10V Dimmable, Photocell, 4000K | 120-277V | 0-10V | 40 | 4500 | 112.5 | 4000K | 70 | 50,000 | Photocell | Bronze |
| FCWUZDA1T350KBRPC                                  | Wall Pack, 120-277V, 0-10V Dimmable, Photocell, 5000K | 120-277V | 0-10V | 40 | 4500 | 112.5 | 5000K | 70 | 50,000 | Photocell | Bronze |
| FCWUZDA2T340KBRPC                                  | Wall Pack, 120-277V, 0-10V Dimmable, Photocell, 4000K | 120-277V | 0-10V | 90 | 9500 | 105   | 4000K | 70 | 50,000 | Photocell | Bronze |
| FCWUZDA2T350KBRPC                                  | Wall Pack, 120-277V, 0-10V Dimmable, Photocell, 5000K | 120-277V | 0-10V | 90 | 9500 | 105   | 5000K | 70 | 50,000 | Photocell | Bronze |



Elements  
by TCP

| Item Number | Item Description | Voltage | Dimming | Wattage <sup>1</sup> | Lumens <sup>2</sup> | LPW | CCT(K) | CRI | Rated Life (hrs) | Controls | Finish |
|-------------|------------------|---------|---------|----------------------|---------------------|-----|--------|-----|------------------|----------|--------|
|-------------|------------------|---------|---------|----------------------|---------------------|-----|--------|-----|------------------|----------|--------|

## ELEMENTS LED CANOPY LIGHTS

### NEW LED CANOPY LIGHT WET LOCATION RATED



Elements  
by TCP

|           |                                                          |          |   |    |      |       |       |     |        |   |        |
|-----------|----------------------------------------------------------|----------|---|----|------|-------|-------|-----|--------|---|--------|
| CP4500140 | Small Canopy, Square, Universal, Non-Dimmable, Photocell | 120-277V | – | 45 | 5350 | 118.9 | 4000K | >80 | 50,000 | – | Bronze |
| CP4500150 | Small Canopy, Square, Universal, Non-Dimmable, Photocell | 120-277V | – | 45 | 5350 | 118.9 | 5000K | >80 | 50,000 | – | Bronze |
| CP7000140 | Small Canopy, Square, Universal, Non-Dimmable, Photocell | 120-277V | – | 70 | 7600 | 108.6 | 4000K | >80 | 50,000 | – | Bronze |
| CP7000150 | Small Canopy, Square, Universal, Non-Dimmable, Photocell | 120-277V | – | 70 | 7600 | 108.6 | 5000K | >80 | 50,000 | – | Bronze |

## ELEMENTS LED POST TOP

### LED POST TOP WET LOCATION RATED



Elements  
by TCP

|                  |                                                                               |          |       |     |       |     |       |    |        |                      |        |
|------------------|-------------------------------------------------------------------------------|----------|-------|-----|-------|-----|-------|----|--------|----------------------|--------|
| PTUZDA1T540KN7BR | LED Post Top, Universal, 120-277V, 0-10V Dimming, NEMA 7-Pin Photocell, 4000K | 120-277V | 0-10V | 75  | 9000  | 117 | 4000K | 70 | 50,000 | NEMA 7-Pin Photocell | Bronze |
| PTUZDA1T550KN7BR | LED Post Top, Universal, 120-277V, 0-10V Dimming, NEMA 7-Pin Photocell, 5000K | 120-277V | 0-10V | 75  | 9000  | 117 | 5000K | 70 | 50,000 | NEMA 7-Pin Photocell | Bronze |
| PTUZDA2T540KN7BR | LED Post Top, Universal, 120-277V, 0-10V Dimming, NEMA 7-Pin Photocell, 4000K | 120-277V | 0-10V | 100 | 12500 | 125 | 4000K | 70 | 50,000 | NEMA 7-Pin Photocell | Bronze |
| PTUZDA2T550KN7BR | LED Post Top, Universal, 120-277V, 0-10V Dimming, NEMA 7-Pin Photocell, 5000K | 120-277V | 0-10V | 100 | 12500 | 125 | 5000K | 70 | 50,000 | NEMA 7-Pin Photocell | Bronze |
| PTUZDA3T540KN7BR | LED Post Top, Universal, 120-277V, 0-10V Dimming, NEMA 7-Pin Photocell, 4000K | 120-277V | 0-10V | 150 | 18750 | 125 | 4000K | 70 | 50,000 | NEMA 7-Pin Photocell | Bronze |
| PTUZDA3T550KN7BR | LED Post Top, Universal, 120-277V, 0-10V Dimming, NEMA 7-Pin Photocell, 5000K | 120-277V | 0-10V | 150 | 18750 | 125 | 5000K | 70 | 50,000 | NEMA 7-Pin Photocell | Bronze |

## ELEMENTS LED FLOOD LIGHTS (CONSULT SPEC SHEET FOR ORDERING MATRIX)

### LED FLOOD LIGHTS - SMALL WET LOCATION RATED



Elements  
by TCP

|              |                                                                       |          |   |    |      |     |       |    |        |   |        |
|--------------|-----------------------------------------------------------------------|----------|---|----|------|-----|-------|----|--------|---|--------|
| FLKUA3W40KBR | Flood Light, Small, 120-277V, Non-Dimmable, Knuckle, Wide Beam, 4000K | 120-277V | – | 50 | 6250 | 125 | 4000K | 70 | 50,000 | – | Bronze |
| FLKUA3W50KBR | Flood Light, Small, 120-277V, Non-Dimmable, Knuckle, Wide Beam, 5000K | 120-277V | – | 50 | 6250 | 125 | 5000K | 70 | 50,000 | – | Bronze |
| FLYUA3W40KBR | Flood Light, Small, 120-277V, Non-Dimmable, Yoke, Wide Beam, 4000K    | 120-277V | – | 50 | 6250 | 125 | 4000K | 70 | 50,000 | – | Bronze |
| FLYUA3W50KBR | Flood Light, Small, 120-277V, Non-Dimmable, Yoke, Wide Beam, 5000K    | 120-277V | – | 50 | 6250 | 125 | 5000K | 70 | 50,000 | – | Bronze |

| Item Number                                    | Item Description | Voltage | Dimming | Wattage <sup>1</sup> | Lumens <sup>2</sup> | LPW | CCT(K) | CRI | Rated Life (hrs) | Controls | Finish |
|------------------------------------------------|------------------|---------|---------|----------------------|---------------------|-----|--------|-----|------------------|----------|--------|
| <b>ELEMENTS LED BARN LIGHT LUMINAIRE</b>       |                  |         |         |                      |                     |     |        |     |                  |          |        |
| <b>LED BARN LIGHT cULus WET LOCATION RATED</b> |                  |         |         |                      |                     |     |        |     |                  |          |        |

|                |                                                          |          |       |    |      |     |      |    |        |                      |        |
|----------------|----------------------------------------------------------|----------|-------|----|------|-----|------|----|--------|----------------------|--------|
| SLUA140KN3BRZ  | LED Barn Light, Non Dim, 120-277V, 3-Pin PC Rec., 4000K  | 120-277V | –     | 45 | 6400 | 142 | 4000 | 70 | 50,000 | NEMA 3-Pin Photocell | Bronze |
| SLUA150KN3BRZ  | LED Barn Light, Non Dim, 120-277V, 3-Pin PC Rec., 5000K  | 120-277V | –     | 45 | 6500 | 144 | 5000 | 70 | 50,000 | NEMA 3-Pin Photocell | Bronze |
| SLUA240KN3BRZ  | LED Barn Light, Non Dim, 120-277V, 3-Pin PC Rec., 4000K  | 120-277V | –     | 70 | 9500 | 136 | 4000 | 70 | 50,000 | NEMA 3-Pin Photocell | Bronze |
| SLUA250KN3BRZ  | LED Barn Light, Non Dim, 120-277V, 3-Pin PC Rec., 5000K  | 120-277V | –     | 70 | 9700 | 139 | 5000 | 70 | 50,000 | NEMA 3-Pin Photocell | Bronze |
| SLUZDA140KN7BR | LED Barn Light, 0-10 Dim, 120-277V, 7-Pin PC Rec., 4000K | 120-277V | 0-10V | 45 | 6400 | 142 | 4000 | 70 | 50,000 | NEMA 7-Pin Photocell | Bronze |
| SLUZDA150KN7BR | LED Barn Light, 0-10 Dim, 120-277V, 7-Pin PC Rec., 5000K | 120-277V | 0-10V | 45 | 6500 | 144 | 5000 | 70 | 50,000 | NEMA 7-Pin Photocell | Bronze |
| SLUZDA240KN7BR | LED Barn Light, 0-10 Dim, 120-277V, 7-Pin PC Rec., 4000K | 120-277V | 0-10V | 70 | 9500 | 136 | 4000 | 70 | 50,000 | NEMA 7-Pin Photocell | Bronze |
| SLUZDA250KN7BR | LED Barn Light, 0-10 Dim, 120-277V, 7-Pin PC Rec., 5000K | 120-277V | 0-10V | 70 | 9700 | 139 | 5000 | 70 | 50,000 | NEMA 7-Pin Photocell | Bronze |



**Elements**  
by TCP

|                                                    |  |  |  |  |  |  |  |  |  |  |  |
|----------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|
| <b>ELEMENTS LED SECURITY LIGHT LUMINAIRE</b>       |  |  |  |  |  |  |  |  |  |  |  |
| <b>LED SECURITY LIGHT cULus WET LOCATION RATED</b> |  |  |  |  |  |  |  |  |  |  |  |

|               |                                                         |          |   |    |      |     |      |    |        |   |        |
|---------------|---------------------------------------------------------|----------|---|----|------|-----|------|----|--------|---|--------|
| RSLUA140KPCSV | LED Security Light, Non Dim, 120-277V, Button PC, 4000K | 120-277V | – | 27 | 3800 | 141 | 4000 | 70 | 50,000 | – | Silver |
| RSLUA150KPCSV | LED Security Light, Non Dim, 120-277V, Button PC, 5000K | 120-277V | – | 27 | 3900 | 144 | 5000 | 70 | 50,000 | – | Silver |
| RSLUA240KPCSV | LED Security Light, Non Dim, 120-277V, Button PC, 4000K | 120-277V | – | 40 | 5500 | 138 | 4000 | 70 | 50,000 | – | Silver |
| RSLUA250KPCSV | LED Security Light, Non Dim, 120-277V, Button PC, 5000K | 120-277V | – | 40 | 5700 | 143 | 5000 | 70 | 50,000 | – | Silver |



**Elements**  
by TCP



Item Number

Item Description

Voltage

Dimming

Wattage

Lumens<sup>1,2</sup>

LPW

Distribution<sup>3</sup>

Throw

CCT(K)

CRI

Rated Life (hrs)

Finish

## ELEMENTS LED AREA LIGHT LUMINAIRE GEN 2

## LED AREA LIGHT LUMINAIRE cULus WET LOCATION RATED

Elements  
by TCP

|                  |                                                                     |          |       |     |       |       |     |         |      |     |        |        |
|------------------|---------------------------------------------------------------------|----------|-------|-----|-------|-------|-----|---------|------|-----|--------|--------|
| TALUZDA2T3F40KBR | LED Area Light, 0-10V Dimming, 120-277V, 14000L, Forward Throw, 40K | 120-277V | 0-10V | 100 | 14000 | 140   | III | Forward | 4000 | 70+ | 50,000 | Bronze |
| TALHZDA2T3F40KBR | LED Area Light, 0-10V Dimming, 347/480V, 14000L, Forward Throw, 40K | 347/480V | 0-10V | 100 | 14000 | 140   | III | Forward | 4000 | 70+ | 50,000 | Bronze |
| TALUZDA2T3F50KBR | LED Area Light, 0-10V Dimming, 120-277V, 14000L, Forward Throw, 50K | 120-277V | 0-10V | 100 | 14000 | 140   | III | Forward | 5000 | 70+ | 50,000 | Bronze |
| TALHZDA2T3F50KBR | LED Area Light, 0-10V Dimming, 347/480V, 14000L, Forward Throw, 50K | 347/480V | 0-10V | 100 | 14000 | 140   | III | Forward | 5000 | 70+ | 50,000 | Bronze |
| TALUZDA2T3L40KBR | LED Area Light, 0-10V Dimming, 120-277V, 14000L, Left Throw, 40K    | 120-277V | 0-10V | 100 | 14000 | 140   | III | Left    | 4000 | 70+ | 50,000 | Bronze |
| TALHZDA2T3L40KBR | LED Area Light, 0-10V Dimming, 347/480V, 14000L, Left Throw, 40K    | 347/480V | 0-10V | 100 | 14000 | 140   | III | Left    | 4000 | 70+ | 50,000 | Bronze |
| TALUZDA2T3L50KBR | LED Area Light, 0-10V Dimming, 120-277V, 14000L, Left Throw, 50K    | 120-277V | 0-10V | 100 | 14000 | 140   | III | Left    | 5000 | 70+ | 50,000 | Bronze |
| TALHZDA2T3L50KBR | LED Area Light, 0-10V Dimming, 347/480V, 14000L, Left Throw, 50K    | 347/480V | 0-10V | 100 | 14000 | 140   | III | Left    | 5000 | 70+ | 50,000 | Bronze |
| TALUZDA2T3B40KBR | LED Area Light, 0-10V Dimming, 120-277V, 14000L, Back Throw, 40K    | 120-277V | 0-10V | 100 | 14000 | 140   | III | Back    | 4000 | 70+ | 50,000 | Bronze |
| TALHZDA2T3B40KBR | LED Area Light, 0-10V Dimming, 347/480V, 14000L, Back Throw, 40K    | 347/480V | 0-10V | 100 | 14000 | 140   | III | Back    | 4000 | 70+ | 50,000 | Bronze |
| TALUZDA2T3B50KBR | LED Area Light, 0-10V Dimming, 120-277V, 14000L, Back Throw, 50K    | 120-277V | 0-10V | 100 | 14000 | 140   | III | Back    | 5000 | 70+ | 50,000 | Bronze |
| TALHZDA2T3B50KBR | LED Area Light, 0-10V Dimming, 347/480V, 14000L, Back Throw, 50K    | 347/480V | 0-10V | 100 | 14000 | 140   | III | Back    | 5000 | 70+ | 50,000 | Bronze |
| TALUZDA2T3R50KBR | LED Area Light, 0-10V Dimming, 120-277V, 14000L, Right Throw, 50K   | 120-277V | 0-10V | 100 | 14000 | 140   | III | Right   | 5000 | 70+ | 50,000 | Bronze |
| TALHZDA2T3R50KBR | LED Area Light, 0-10V Dimming, 347/480V, 14000L, Right Throw, 50K   | 347/480V | 0-10V | 100 | 14000 | 140   | III | Right   | 5000 | 70+ | 50,000 | Bronze |
| TALUZDA2T3R50KBR | LED Area Light, 0-10V Dimming, 120-277V, 14000L, Right Throw, 50K   | 120-277V | 0-10V | 100 | 14000 | 140   | III | Right   | 5000 | 70+ | 50,000 | Bronze |
| TALHZDA2T3R50KBR | LED Area Light, 0-10V Dimming, 347/480V, 14000L, Right Throw, 50K   | 347/480V | 0-10V | 100 | 14000 | 140   | III | Right   | 5000 | 70+ | 50,000 | Bronze |
| TALUZDA3T3F40KBR | LED Area Light, 0-10V Dimming, 120-277V, 20500L, Forward Throw, 40K | 120-277V | 0-10V | 145 | 20500 | 141.4 | III | Forward | 4000 | 70+ | 50,000 | Bronze |
| TALHZDA3T3F40KBR | LED Area Light, 0-10V Dimming, 347/480V, 20500L, Forward Throw, 40K | 347/480V | 0-10V | 145 | 20500 | 141.4 | III | Forward | 4000 | 70+ | 50,000 | Bronze |
| TALUZDA3T3F50KBR | LED Area Light, 0-10V Dimming, 120-277V, 20500L, Forward Throw, 50K | 120-277V | 0-10V | 145 | 20500 | 141.4 | III | Forward | 5000 | 70+ | 50,000 | Bronze |
| TALHZDA3T3F50KBR | LED Area Light, 0-10V Dimming, 347/480V, 20500L, Forward Throw, 50K | 347/480V | 0-10V | 145 | 20500 | 141.4 | III | Forward | 5000 | 70+ | 50,000 | Bronze |
| TALUZDA3T3L40KBR | LED Area Light, 0-10V Dimming, 120-277V, 20500L, Left Throw, 40K    | 120-277V | 0-10V | 145 | 20500 | 141.4 | III | Left    | 4000 | 70+ | 50,000 | Bronze |
| TALHZDA3T3L40KBR | LED Area Light, 0-10V Dimming, 347/480V, 20500L, Left Throw, 40K    | 347/480V | 0-10V | 145 | 20500 | 141.4 | III | Left    | 4000 | 70+ | 50,000 | Bronze |
| TALUZDA3T3L50KBR | LED Area Light, 0-10V Dimming, 120-277V, 20500L, Left Throw, 50K    | 120-277V | 0-10V | 145 | 20500 | 141.4 | III | Left    | 5000 | 70+ | 50,000 | Bronze |
| TALHZDA3T3L50KBR | LED Area Light, 0-10V Dimming, 347/480V, 20500L, Left Throw, 50K    | 347/480V | 0-10V | 145 | 20500 | 141.4 | III | Left    | 5000 | 70+ | 50,000 | Bronze |
| TALUZDA3T3B40KBR | LED Area Light, 0-10V Dimming, 120-277V, 20500L, Back Throw, 40K    | 120-277V | 0-10V | 145 | 20500 | 141.4 | III | Back    | 4000 | 70+ | 50,000 | Bronze |
| TALHZDA3T3B40KBR | LED Area Light, 0-10V Dimming, 347/480V, 20500L, Back Throw, 40K    | 347/480V | 0-10V | 145 | 20500 | 141.4 | III | Back    | 4000 | 70+ | 50,000 | Bronze |
| TALUZDA3T3B50KBR | LED Area Light, 0-10V Dimming, 120-277V, 20500L, Back Throw, 50K    | 120-277V | 0-10V | 145 | 20500 | 141.4 | III | Back    | 5000 | 70+ | 50,000 | Bronze |
| TALHZDA3T3B50KBR | LED Area Light, 0-10V Dimming, 347/480V, 20500L, Back Throw, 50K    | 347/480V | 0-10V | 145 | 20500 | 141.4 | III | Back    | 5000 | 70+ | 50,000 | Bronze |
| TALUZDA3T3R40KBR | LED Area Light, 0-10V Dimming, 120-277V, 20500L, Right Throw, 40K   | 120-277V | 0-10V | 145 | 20500 | 141.4 | III | Right   | 4000 | 70+ | 50,000 | Bronze |
| TALHZDA3T3R40KBR | LED Area Light, 0-10V Dimming, 347/480V, 20500L, Right Throw, 40K   | 347/480V | 0-10V | 145 | 20500 | 141.4 | III | Right   | 4000 | 70+ | 50,000 | Bronze |
| TALUZDA3T3R50KBR | LED Area Light, 0-10V Dimming, 120-277V, 20500L, Right Throw, 50K   | 120-277V | 0-10V | 300 | 40000 | 133.3 | III | Right   | 5000 | 70  | 50,000 | Bronze |
| TALHZDA3T3R50KBR | LED Area Light, 0-10V Dimming, 347/480V, 20500L, Right Throw, 50K   | 347/480V | 0-10V | 300 | 40000 | 133.3 | III | Right   | 5000 | 70  | 50,000 | Bronze |



## FACTORY INSTALLED OPTIONS (add to catalog number) ACCESSORIES (Field installed)

Motion Sensor  
MS - PIR Motion Sensor with Daylight Harvesting and Bi-Level Dimming.  
N7 - NEMA 7-Pin Photocell Receptacle  
N3 - NEMA 3-Pin Photocell Receptacle

TALPIRREMOTE - Remote Control to program the Motion Sensor (Only one needed per job)  
TALSHIELD1 - A2, A3 Backlight Shield  
TALSHIELD2 - A4, A5 Backlight Shield

<sup>1</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

<sup>2</sup> Actual lumen output and input wattage may differ by +/-10%

<sup>3</sup> Type III Standard. Types IV and V are made to order and require additional lead time. Consult factory for details.

For the most up-to-date specs and warranty information, please visit [www.tcpinc.com](http://www.tcpinc.com)

| Item Number | Item Description | Voltage | Dimming | Wattage | Lumens <sup>1,2</sup> | LPW | Distribution <sup>3</sup> | Throw | CCT(K) | CRI | Rated Life (hrs) | Finish |
|-------------|------------------|---------|---------|---------|-----------------------|-----|---------------------------|-------|--------|-----|------------------|--------|
|-------------|------------------|---------|---------|---------|-----------------------|-----|---------------------------|-------|--------|-----|------------------|--------|

## ELEMENTS LED AREA LIGHT LUMINAIRE GEN 2

### LED AREA LIGHT LUMINAIRE cULus Wet Location Rated

|                  |                                                                     |          |       |     |       |       |     |         |      |     |        |        |
|------------------|---------------------------------------------------------------------|----------|-------|-----|-------|-------|-----|---------|------|-----|--------|--------|
| TALUZDA4T3F40KBR | LED Area Light, 0-10V Dimming, 120-277V, 30200L, Forward Throw, 40K | 120-277V | 0-10V | 200 | 30200 | 151   | III | Forward | 4000 | 70+ | 50,000 | Bronze |
| TALHZDA4T3F40KBR | LED Area Light, 0-10V Dimming, 347/480V, 30200L, Forward Throw, 40K | 347/480V | 0-10V | 200 | 30200 | 151   | III | Forward | 4000 | 70+ | 50,000 | Bronze |
| TALUZDA4T3F50KBR | LED Area Light, 0-10V Dimming, 120-277V, 30200L, Forward Throw, 50K | 120-277V | 0-10V | 200 | 30200 | 151   | III | Forward | 5000 | 70+ | 50,000 | Bronze |
| TALHZDA4T3F50KBR | LED Area Light, 0-10V Dimming, 347/480V, 30200L, Forward Throw, 50K | 347/480V | 0-10V | 200 | 30200 | 151   | III | Forward | 5000 | 70+ | 50,000 | Bronze |
| TALUZDA4T3L40KBR | LED Area Light, 0-10V Dimming, 120-277V, 30200L, Left Throw, 40K    | 120-277V | 0-10V | 200 | 30200 | 151   | III | Left    | 4000 | 70+ | 50,000 | Bronze |
| TALHZDA4T3L40KBR | LED Area Light, 0-10V Dimming, 347/480V, 30200L, Left Throw, 40K    | 347/480V | 0-10V | 200 | 30200 | 151   | III | Left    | 4000 | 70+ | 50,000 | Bronze |
| TALUZDA4T3L50KBR | LED Area Light, 0-10V Dimming, 120-277V, 30200L, Left Throw, 50K    | 120-277V | 0-10V | 200 | 30200 | 151   | III | Left    | 5000 | 70+ | 50,000 | Bronze |
| TALHZDA4T3L50KBR | LED Area Light, 0-10V Dimming, 347/480V, 30200L, Left Throw, 50K    | 347/480V | 0-10V | 200 | 30200 | 151   | III | Left    | 5000 | 70+ | 50,000 | Bronze |
| TALUZDA4T3B40KBR | LED Area Light, 0-10V Dimming, 120-277V, 30200L, Back Throw, 40K    | 120-277V | 0-10V | 200 | 30200 | 151   | III | Back    | 4000 | 70+ | 50,000 | Bronze |
| TALHZDA4T3B40KBR | LED Area Light, 0-10V Dimming, 347/480V, 30200L, Back Throw, 40K    | 347/480V | 0-10V | 200 | 30200 | 151   | III | Back    | 4000 | 70+ | 50,000 | Bronze |
| TALUZDA4T3B50KBR | LED Area Light, 0-10V Dimming, 120-277V, 30200L, Back Throw, 50K    | 120-277V | 0-10V | 200 | 30200 | 151   | III | Back    | 5000 | 70+ | 50,000 | Bronze |
| TALHZDA4T3B50KBR | LED Area Light, 0-10V Dimming, 347/480V, 30200L, Back Throw, 50K    | 347/480V | 0-10V | 200 | 30200 | 151   | III | Back    | 5000 | 70+ | 50,000 | Bronze |
| TALUZDA4T3R50KBR | LED Area Light, 0-10V Dimming, 120-277V, 30200L, Right Throw, 50K   | 120-277V | 0-10V | 200 | 30200 | 151   | III | Right   | 5000 | 70+ | 50,000 | Bronze |
| TALHZDA4T3R50KBR | LED Area Light, 0-10V Dimming, 347/480V, 30200L, Right Throw, 50K   | 347/480V | 0-10V | 200 | 30200 | 151   | III | Right   | 5000 | 70+ | 50,000 | Bronze |
| TALUZDA4T3R50KBR | LED Area Light, 0-10V Dimming, 120-277V, 30200L, Right Throw, 50K   | 120-277V | 0-10V | 200 | 30200 | 151   | III | Right   | 5000 | 70+ | 50,000 | Bronze |
| TALHZDA4T3R50KBR | LED Area Light, 0-10V Dimming, 347/480V, 30200L, Right Throw, 50K   | 347/480V | 0-10V | 200 | 30200 | 151   | III | Right   | 5000 | 70+ | 50,000 | Bronze |
| TALUZDA5T3F40KBR | LED Area Light, 0-10V Dimming, 120-277V, 42100L, Forward Throw, 40K | 120-277V | 0-10V | 300 | 42100 | 140.3 | III | Forward | 4000 | 70+ | 50,000 | Bronze |
| TALHZDA5T3F40KBR | LED Area Light, 0-10V Dimming, 347/480V, 42100L, Forward Throw, 40K | 347/480V | 0-10V | 300 | 42100 | 140.3 | III | Forward | 4000 | 70+ | 50,000 | Bronze |
| TALUZDA5T3F50KBR | LED Area Light, 0-10V Dimming, 120-277V, 42100L, Forward Throw, 50K | 120-277V | 0-10V | 300 | 42100 | 140.3 | III | Forward | 5000 | 70+ | 50,000 | Bronze |
| TALHZDA5T3F50KBR | LED Area Light, 0-10V Dimming, 347/480V, 42100L, Forward Throw, 50K | 347/480V | 0-10V | 300 | 42100 | 140.3 | III | Forward | 5000 | 70+ | 50,000 | Bronze |
| TALUZDA5T3L40KBR | LED Area Light, 0-10V Dimming, 120-277V, 42100L, Left Throw, 40K    | 120-277V | 0-10V | 300 | 42100 | 140.3 | III | Left    | 4000 | 70+ | 50,000 | Bronze |
| TALHZDA5T3L40KBR | LED Area Light, 0-10V Dimming, 347/480V, 42100L, Left Throw, 40K    | 347/480V | 0-10V | 300 | 42100 | 140.3 | III | Left    | 4000 | 70+ | 50,000 | Bronze |
| TALUZDA5T3L50KBR | LED Area Light, 0-10V Dimming, 120-277V, 42100L, Left Throw, 50K    | 120-277V | 0-10V | 300 | 42100 | 140.3 | III | Left    | 5000 | 70+ | 50,000 | Bronze |
| TALHZDA5T3L50KBR | LED Area Light, 0-10V Dimming, 347/480V, 42100L, Left Throw, 50K    | 347/480V | 0-10V | 300 | 42100 | 140.3 | III | Left    | 5000 | 70+ | 50,000 | Bronze |
| TALUZDA5T3B40KBR | LED Area Light, 0-10V Dimming, 120-277V, 42100L, Back Throw, 40K    | 120-277V | 0-10V | 300 | 42100 | 140.3 | III | Back    | 4000 | 70+ | 50,000 | Bronze |
| TALHZDA5T3B40KBR | LED Area Light, 0-10V Dimming, 347/480V, 42100L, Back Throw, 40K    | 347/480V | 0-10V | 300 | 42100 | 140.3 | III | Back    | 4000 | 70+ | 50,000 | Bronze |
| TALUZDA5T3B50KBR | LED Area Light, 0-10V Dimming, 120-277V, 42100L, Back Throw, 50K    | 120-277V | 0-10V | 300 | 42100 | 140.3 | III | Back    | 5000 | 70+ | 50,000 | Bronze |
| TALHZDA5T3B50KBR | LED Area Light, 0-10V Dimming, 347/480V, 42100L, Back Throw, 50K    | 347/480V | 0-10V | 300 | 42100 | 140.3 | III | Back    | 5000 | 70+ | 50,000 | Bronze |
| TALUZDA5T3R40KBR | LED Area Light, 0-10V Dimming, 120-277V, 42100L, Right Throw, 40K   | 120-277V | 0-10V | 300 | 42100 | 140.3 | III | Right   | 4000 | 70+ | 50,000 | Bronze |
| TALHZDA5T3R40KBR | LED Area Light, 0-10V Dimming, 347/480V, 42100L, Right Throw, 40K   | 347/480V | 0-10V | 300 | 42100 | 140.3 | III | Right   | 4000 | 70+ | 50,000 | Bronze |
| TALUZDA5T3R50KBR | LED Area Light, 0-10V Dimming, 120-277V, 42100L, Right Throw, 50K   | 120-277V | 0-10V | 300 | 42100 | 140.3 | III | Right   | 5000 | 70  | 50,000 | Bronze |
| TALHZDA5T3R50KBR | LED Area Light, 0-10V Dimming, 347/480V, 42100L, Right Throw, 50K   | 347/480V | 0-10V | 300 | 42100 | 140.3 | III | Right   | 5000 | 70  | 50,000 | Bronze |



Elements  
by TCP



#### FACTORY INSTALLED OPTIONS (add to catalog number) ACCESSORIES (Field installed)

##### Motion Sensor

MS - PIR Motion Sensor with Daylight Harvesting and Bi-Level Dimming.

N7 - NEMA 7-Pin Photocell Receptacle

N3 - NEMA 3-Pin Photocell Receptacle

TALPIRREMOTE - Remote Control to program the Motion Sensor (Only one needed per job)

TALSHIELD1 - A2, A3 Backlight Shield

TALSHIELD2 - A4, A5 Backlight Shield

<sup>1</sup> Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

<sup>2</sup> Actual lumen output and input wattage may differ by +/-10%

<sup>3</sup> Type III Standard. Types IV and V are made to order and require additional lead time. Consult factory for details.

For the most up-to-date specs and warranty information, please visit [www.tcp.com](http://www.tcp.com)



# HORTICULTURE LIGHTING

Research tells us that LED lighting will continue to hold the largest revenue share in the horticulture lighting market for the foreseeable future. TCP is proud to currently offer you new LED products in this expanding area of the industry.

It's all about growth.

| Item Number                         | Item Description                                                           | Voltage  | Dimming | Wattage | PPF (umol/s) | PPE (umol/J) | Rated Life (hrs) | Spectrum     | Power Factor |
|-------------------------------------|----------------------------------------------------------------------------|----------|---------|---------|--------------|--------------|------------------|--------------|--------------|
| <b>HORTICULTURE LED VAPOR TIGHT</b> |                                                                            |          |         |         |              |              |                  |              |              |
| HVT4UZDA3VG                         | 4 Foot, 100W, LED Vapor Tight, 0-10V Dimming, All Purpose Growth Spectrum  | 120-277V | 0-10V   | 100     | 191          | 1.92         | 50,000           | All Purpose  | >.9          |
| HVT4UZDA3FL                         | 4 Foot, 100W, LED Vapor Tight, 0-10V Dimming, Supplemental Growth Spectrum | 120-277V | 0-10V   | 100     | 289          | 2.71         | 50,000           | Supplemental | >.9          |



#### FACTORY INSTALLED OPTIONS:

**SM** – Smart Box  
**1P** – 6FT Cord with NEMA 515 Plug

|                                                      |                                                                 |          |       |     |     |     |        |             |     |
|------------------------------------------------------|-----------------------------------------------------------------|----------|-------|-----|-----|-----|--------|-------------|-----|
| <b>HTM SERIES MODULAR HORTICULTURE LED TOP LIGHT</b> |                                                                 |          |       |     |     |     |        |             |     |
| HTMUZDA3S1                                           | 230W, LED Top Light, 0-10V Dimming, All Purpose Growth Spectrum | 120-277V | 0-10V | 230 | 572 | 2.5 | 50,000 | All Purpose | >.9 |

#### FACTORY INSTALLED OPTIONS:

**SM** – Smart Box

#### FIELD INSTALLED ACCESSORIES (ordered separately)

**HTMCONNKIT2** – Modular Connection (2) Units  
**HTMCONNKIT3** – Modular Connection (3) Units  
**HTMCONNKIT4** – Modular Connection (4) Units

**HTMPC65W** – 6FT Power Cord (no plug)  
**HTMDAISY2FT** – Quick Connect Daisy Chain Power Cord  
**EXPYHANGKIT10FT** – 10FT Hanging Cable Accessory



|                                   |                                |      |       |    |    |      |        |             |      |
|-----------------------------------|--------------------------------|------|-------|----|----|------|--------|-------------|------|
| <b>HORTICULTURE LED STARLIGHT</b> |                                |      |       |    |    |      |        |             |      |
| L25SL22HD30VG                     | 25W Horticulture LED Starlight | 120V | Triac | 25 | 60 | 2.44 | 30,000 | All Purpose | >.98 |


#### AVAILABLE ACCESSORIES (ordered separately)

**L25SL22HD30VGCLAMP** – Clamp mounted fixture




#### TCP SPECTRUM TECHNOLOGY

##### Full Spectrum – All Purpose Growth

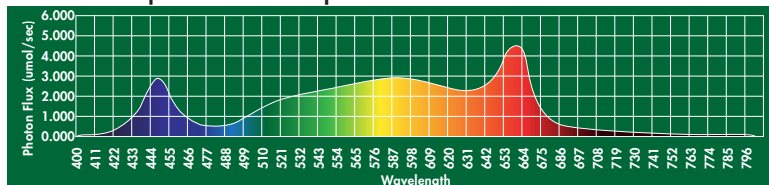

TCP's Full Spectrum Technology includes a balance of blue, green and red light to ensure your plants receive the light energy they need for both vegetative and flower growth stages.

##### Red Spectrum – Supplemental Growth

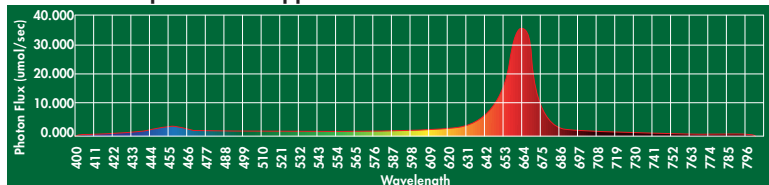

TCP's Red Focused Spectrum includes an extensive amount of red spectrum content to aggressively promote plant photosynthesis. This can be used during the flowering stage to provide a bump in light energy for your plants.



# SMARTSTUFF™ CONTROLS

Technology continues to advance and change on a daily basis, and the lighting industry is no exception to that fact. TCP offers you numerous SmartStuff™ products to help you efficiently manage the lighting throughout the inside and outside of your home or business.

All our products are Bluetooth® Signal Mesh-based. TCP also has a line-up of energy-efficient LED Smart bulbs if you want to transition away from traditional lamps. Be smart about it. You'll save energy and money in the process.

| Item Number                                              | Lamp Type | Item Description                                    | Voltage | Lamp Watts | Wattage Equivalent | Lumens | LPW   | Base | CRI | Color Temperature | Case Quantity |
|----------------------------------------------------------|-----------|-----------------------------------------------------|---------|------------|--------------------|--------|-------|------|-----|-------------------|---------------|
| <b>15,000 HOUR SMARTSTUFF LED BLUETOOTH® LAMPS</b>       |           |                                                     |         |            |                    |        |       |      |     |                   |               |
| <b>NON DIMMABLE LED 6W SMARTSTUFF A19 LAMP, E26 BASE</b> |           |                                                     |         |            |                    |        |       |      |     |                   |               |
| SMA1927KBT                                               | A19       | Non Dim Smart LED 6w A19, 27K Bluetooth             | 120     | 6          | 60W                | 800    | 133.3 | E26  | 80  | 2700              | 12            |
| SMA19CTBT                                                | A19       | Non Dim Smart LED 6w A19, CCT Tunable Bluetooth     | 120     | 6          | 60W                | 800    | 133.3 | E26  | 80  | 2700-5000         | 12            |
| SMA19RGBWBT                                              | A19       | Non Dim Smart LED 6w A19, RGBW Bluetooth            | 120     | 6          | 60W                | 800    | 133.3 | E26  | 80  | 2700 + RGB        | 12            |
| SMA1927KSNBT                                             | A19       | Non Dim Smart LED 6w A19, 27K + MW Motion Bluetooth | 120     | 6          | 60W                | 750    | 125   | E26  | 80  | 2700              | 12            |



## SMARTSTUFF SMARTBOX LED BLUETOOTH® LUMINAIRE ACCESSORIES

| Item Number | Item Description                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        | Voltage        | Dimming | Input Line Frequency | Max Power | Output Voltage | Operating Temp | Humidity | Radio Protocol | Communication Range | Options           |
|-------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|---------|----------------------|-----------|----------------|----------------|----------|----------------|---------------------|-------------------|
| SMBXBT      | The TCP SmartBox is a Bluetooth Signal Mesh based lighting control device. Once connected to a luminaire, the Bluetooth Signal Mesh and SmartBox can be configured through the TCP SmartStuff App on any Android and iOS-based devices. Through the SmartStuff App, a luminaire can be directly controlled by the SmartBox or programmed to function automatically through a variety of control schemes. Suitable for both dry and damp locations.                                                                                                                                                      | 120-277V @15mA | 0-10V   | 50/60Hz              | 1W        | 0-10 VDC       | -23°F to 113°F | <80% RH  | Bluetooth®     | 150ft/46m           |                   |
| SMBXFXBT    | The SmartBox Fixture Sensor is a Bluetooth® Signal Mesh based lighting control device. Once connected to a luminaire, the SmartBox + Fixture Sensor provides Motion and Bi-Level Controls. The Fixture Sensor incorporates a microwave sensor that detects motion through nonmetallic objects and a light sensor to measure the ambient light in the area. The SmartBox + Fixture Sensor is compatible with any luminaire with 0-10V dim to off drivers/ballast and can be configured through the TCP SmartStuff App on any Android™ or Apple® Smart devices. Suitable for both dry and damp locations. | 120-277V @30mA | 0-10V   | 50/60Hz              | 2W        | 0-10 VDC       | -23°F to 113°F | <80% RH  | Bluetooth®     | 150ft/46m           | SmartStuff Remote |
| SMBXPLBT    | The SmartBox + Panel Sensor is a lighting control device. Once connected to a luminaire, the SmartBox + Panel Sensor can use either a microwave or a PIR sensor to detect motion and a light sensor to measure the ambient light in the area. This allows the SmartBox + Panel Sensor to control any luminaire with 0-10V dim to off drivers/ballast. Suitable for both dry and damp locations.                                                                                                                                                                                                         | 120-277V @15mA | 0-10V   | 50/60Hz              | 1W        | 0-10 VDC       | -23°F to 113°F | <80% RH  | Bluetooth®     | 150ft/46m           |                   |





# LED FILAMENT LAMPS

TCP's filament products include classic filament A-lamps, LED Shape Filaments, Antique filament lamps, The Good Life line-up, classic filament decorative lamps and Classic Filament T-lamps.

All combine the latest in LED technology with the elegance of filament lighting in its various forms.

# LED FILAMENT LAMPS



| Item Number                                                     | Lamp Type | Item Description                   | Voltage | Lamp Watts | Wattage Equivalent | Lumens | LPW  | Base | CRI | Color Temperature | Glass Type | Case Quantity |
|-----------------------------------------------------------------|-----------|------------------------------------|---------|------------|--------------------|--------|------|------|-----|-------------------|------------|---------------|
| <b>15,000 HOUR LED HIGH CRI FILAMENT LAMPS, DIMMABLE</b>        |           |                                    |         |            |                    |        |      |      |     |                   |            |               |
| <b>DIMMABLE LED HIGH CRI 40W FILAMENT A19, CLEAR, E26 BASE</b>  |           |                                    |         |            |                    |        |      |      |     |                   |            |               |
| FA19D4024E26SCL92                                               | A19       | Dim 92 CRI LED 4.5w A19, Clear-24K | 120     | 4.5        | 40W                | 450    | 100  | E26  | 92  | 2400              | Clear      | 12            |
| FA19D4027E26SCL95                                               | A19       | Dim 95 CRI LED 4.5w A19, Clear-27K | 120     | 4.5        | 40W                | 450    | 100  | E26  | 95  | 2700              | Clear      | 12            |
| FA19D4030E26SCL95                                               | A19       | Dim 95 CRI LED 4.5w A19, Clear-30K | 120     | 4.5        | 40W                | 450    | 100  | E26  | 95  | 3000              | Clear      | 12            |
| FA19D4040E26SCL95                                               | A19       | Dim 95 CRI LED 4.5w A19, Clear-40K | 120     | 4.5        | 40W                | 450    | 100  | E26  | 95  | 4000              | Clear      | 12            |
| FA19D4050E26SCL95                                               | A19       | Dim 95 CRI LED 4.5w A19, Clear-50K | 120     | 4.5        | 40W                | 450    | 100  | E26  | 95  | 5000              | Clear      | 12            |
| <b>DIMMABLE LED HIGH CRI 60W FILAMENT A19, CLEAR, E26 BASE</b>  |           |                                    |         |            |                    |        |      |      |     |                   |            |               |
| FA19D6024E26SCL92                                               | A19       | Dim 92 CRI LED 8w A19, Clear-24K   | 120     | 8          | 60W                | 800    | 100  | E26  | 92  | 2400              | Clear      | 12            |
| FA19D6027E26SCL95                                               | A19       | Dim 95 CRI LED 8w A19, Clear-27K   | 120     | 8          | 60W                | 800    | 100  | E26  | 95  | 2700              | Clear      | 12            |
| FA19D6030E26SCL95                                               | A19       | Dim 95 CRI LED 8w A19, Clear-30K   | 120     | 8          | 60W                | 800    | 100  | E26  | 95  | 3000              | Clear      | 12            |
| FA19D6040E26SCL95                                               | A19       | Dim 95 CRI LED 8w A19, Clear-40K   | 120     | 8          | 60W                | 800    | 100  | E26  | 95  | 4000              | Clear      | 12            |
| FA19D6050E26SCL95                                               | A19       | Dim 95 CRI LED 8w A19, Clear-50K   | 120     | 8          | 60W                | 800    | 100  | E26  | 95  | 5000              | Clear      | 12            |
| <b>DIMMABLE LED HIGH CRI 25W FILAMENT FB11, CLEAR, E12 BASE</b> |           |                                    |         |            |                    |        |      |      |     |                   |            |               |
| FB11D2524E12SCL92                                               | B11       | Dim LED 3w B11, 92 CRI, 24K Clear  | 120     | 3          | 25W                | 250    | 83.3 | E12  | 92  | 2400              | Clear      | 12            |
| FB11D2527E12SCL95                                               | B11       | Dim LED 3w B11, 95 CRI, 27K Clear  | 120     | 3          | 25W                | 250    | 83.3 | E12  | 95  | 2700              | Clear      | 12            |
| FB11D2530E12SCL95                                               | B11       | Dim LED 3w B11, 95 CRI, 30K Clear  | 120     | 3          | 25W                | 250    | 83.3 | E12  | 95  | 3000              | Clear      | 12            |
| FB11D2540E12SCL95                                               | B11       | Dim LED 3w B11, 95 CRI, 40K Clear  | 120     | 3          | 25W                | 250    | 83.3 | E12  | 95  | 4000              | Clear      | 12            |
| FB11D2550E12SCL95                                               | B11       | Dim LED 3w B11, 95 CRI, 50K Clear  | 120     | 3          | 25W                | 250    | 83.3 | E12  | 95  | 5000              | Clear      | 12            |
| <b>DIMMABLE LED HIGH CRI 25W FILAMENT FB11, CLEAR, E26 BASE</b> |           |                                    |         |            |                    |        |      |      |     |                   |            |               |
| FB11D2524E26SCL92                                               | B11       | Dim LED 3w B11, 92 CRI, 24K Clear  | 120     | 3          | 25W                | 250    | 83.3 | E26  | 92  | 2400              | Clear      | 12            |
| FB11D2527E26SCL95                                               | B11       | Dim LED 3w B11, 95 CRI, 27K Clear  | 120     | 3          | 25W                | 250    | 83.3 | E26  | 95  | 2700              | Clear      | 12            |
| FB11D2530E26SCL95                                               | B11       | Dim LED 3w B11, 95 CRI, 30K Clear  | 120     | 3          | 25W                | 250    | 83.3 | E26  | 95  | 3000              | Clear      | 12            |
| FB11D2540E26SCL95                                               | B11       | Dim LED 3w B11, 95 CRI, 40K Clear  | 120     | 3          | 25W                | 250    | 83.3 | E26  | 95  | 4000              | Clear      | 12            |
| FB11D2550E26SCL95                                               | B11       | Dim LED 3w B11, 95 CRI, 50K Clear  | 120     | 3          | 25W                | 250    | 83.3 | E26  | 95  | 5000              | Clear      | 12            |



| Item Number | Lamp Type | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | LPW | Base | CRI | Color Temperature | Glass Type | Case Quantity |
|-------------|-----------|------------------|---------|------------|--------------------|--------|-----|------|-----|-------------------|------------|---------------|
|-------------|-----------|------------------|---------|------------|--------------------|--------|-----|------|-----|-------------------|------------|---------------|

### 15,000 HOUR LED HIGH CRI FILAMENT LAMPS, DIMMABLE

#### DIMMABLE LED HIGH CRI 40W FILAMENT FB11, CLEAR, E12 BASE



|                   |     |                                   |     |   |     |     |    |     |    |      |       |    |
|-------------------|-----|-----------------------------------|-----|---|-----|-----|----|-----|----|------|-------|----|
| FB11D4024E12SCL92 | B11 | Dim LED 4w B11, 92 CRI, 24K Clear | 120 | 4 | 40W | 300 | 75 | E12 | 92 | 2400 | Clear | 12 |
| FB11D4027E12SCL95 | B11 | Dim LED 4w B11, 95 CRI, 27K Clear | 120 | 4 | 40W | 300 | 75 | E12 | 95 | 2700 | Clear | 12 |
| FB11D4030E12SCL95 | B11 | Dim LED 4w B11, 95 CRI, 30K Clear | 120 | 4 | 40W | 300 | 75 | E12 | 95 | 3000 | Clear | 12 |
| FB11D4040E12SCL95 | B11 | Dim LED 4w B11, 95 CRI, 40K Clear | 120 | 4 | 40W | 300 | 75 | E12 | 95 | 4000 | Clear | 12 |
| FB11D4050E12SCL95 | B11 | Dim LED 4w B11, 95 CRI, 50K Clear | 120 | 4 | 40W | 300 | 75 | E12 | 95 | 5000 | Clear | 12 |



#### DIMMABLE LED HIGH CRI 40W FILAMENT FB11, CLEAR, E26 BASE



|                   |     |                                   |     |   |     |     |    |     |    |      |       |    |
|-------------------|-----|-----------------------------------|-----|---|-----|-----|----|-----|----|------|-------|----|
| FB11D4024E26SCL92 | B11 | Dim LED 4w B11, 92 CRI, 24K Clear | 120 | 4 | 40W | 300 | 75 | E26 | 92 | 2400 | Clear | 12 |
| FB11D4027E26SCL95 | B11 | Dim LED 4w B11, 95 CRI, 27K Clear | 120 | 4 | 40W | 300 | 75 | E26 | 95 | 2700 | Clear | 12 |
| FB11D4030E26SCL95 | B11 | Dim LED 4w B11, 95 CRI, 30K Clear | 120 | 4 | 40W | 300 | 75 | E26 | 95 | 3000 | Clear | 12 |
| FB11D4040E26SCL95 | B11 | Dim LED 4w B11, 95 CRI, 40K Clear | 120 | 4 | 40W | 300 | 75 | E26 | 95 | 4000 | Clear | 12 |
| FB11D4050E26SCL95 | B11 | Dim LED 4w B11, 95 CRI, 50K Clear | 120 | 4 | 40W | 300 | 75 | E26 | 95 | 5000 | Clear | 12 |

#### DIMMABLE LED HIGH CRI 60W FILAMENT FB11, CLEAR, E12 BASE



|                   |     |                                   |     |   |     |     |     |     |    |      |       |    |
|-------------------|-----|-----------------------------------|-----|---|-----|-----|-----|-----|----|------|-------|----|
| FB11D6024E12SCL92 | B11 | Dim LED 5w B11, 92 CRI, 24K Clear | 120 | 5 | 60W | 500 | 100 | E12 | 92 | 2400 | Clear | 12 |
| FB11D6027E12SCL95 | B11 | Dim LED 5w B11, 95 CRI, 27K Clear | 120 | 5 | 60W | 500 | 100 | E12 | 95 | 2700 | Clear | 12 |
| FB11D6030E12SCL95 | B11 | Dim LED 5w B11, 95 CRI, 30K Clear | 120 | 5 | 60W | 500 | 100 | E12 | 95 | 3000 | Clear | 12 |
| FB11D6040E12SCL95 | B11 | Dim LED 5w B11, 95 CRI, 40K Clear | 120 | 5 | 60W | 500 | 100 | E12 | 95 | 4000 | Clear | 12 |
| FB11D6050E12SCL95 | B11 | Dim LED 5w B11, 95 CRI, 50K Clear | 120 | 5 | 60W | 500 | 100 | E12 | 95 | 5000 | Clear | 12 |



#### DIMMABLE LED HIGH CRI 60W FILAMENT FB11, CLEAR, E26 BASE



|                   |     |                                   |     |   |     |     |     |     |    |      |       |    |
|-------------------|-----|-----------------------------------|-----|---|-----|-----|-----|-----|----|------|-------|----|
| FB11D4024E26SCL92 | B11 | Dim LED 5w B11, 92 CRI, 24K Clear | 120 | 5 | 60W | 500 | 100 | E26 | 92 | 2400 | Clear | 12 |
| FB11D4027E26SCL95 | B11 | Dim LED 5w B11, 95 CRI, 27K Clear | 120 | 5 | 60W | 500 | 100 | E26 | 95 | 2700 | Clear | 12 |
| FB11D4030E26SCL95 | B11 | Dim LED 5w B11, 95 CRI, 30K Clear | 120 | 5 | 60W | 500 | 100 | E26 | 95 | 3000 | Clear | 12 |
| FB11D4040E26SCL95 | B11 | Dim LED 5w B11, 95 CRI, 40K Clear | 120 | 5 | 60W | 500 | 100 | E26 | 95 | 4000 | Clear | 12 |
| FB11D4050E26SCL95 | B11 | Dim LED 5w B11, 95 CRI, 50K Clear | 120 | 5 | 60W | 500 | 100 | E26 | 95 | 5000 | Clear | 12 |

| Item Number                                                 | Lamp Type | Item Description                               | Voltage | Lamp Watts | Wattage Equivalent | Lumens | LPW  | Base | CRI | Color Temperature | Glass Type | Case Quantity |
|-------------------------------------------------------------|-----------|------------------------------------------------|---------|------------|--------------------|--------|------|------|-----|-------------------|------------|---------------|
| <b>15,000 HOUR LED SHAPE FILAMENT LAMPS, NON DIMMABLE</b>   |           |                                                |         |            |                    |        |      |      |     |                   |            |               |
| <b>NON DIMMABLE LED SHAPE FILAMENT A19, CLEAR, E26 BASE</b> |           |                                                |         |            |                    |        |      |      |     |                   |            |               |
| FA19BUTTERFLYBD                                             | A19       | LED .3w A19 Butterfly Shape, Base Down, Yellow | 120     | 0.3        | —                  | 20     | 66.7 | E26  | >80 | Yellow            | Clear      | 12            |
|                                                             |           |                                                |         |            |                    |        |      |      |     |                   |            |               |
| FA19CATBD                                                   | A19       | LED .3w A19 Cat Shape, Base Down, Yellow       | 120     | 0.3        | —                  | 20     | 66.7 | E26  | >80 | Yellow            | Clear      | 12            |
|                                                             |           |                                                |         |            |                    |        |      |      |     |                   |            |               |
| FA19DOGBD                                                   | A19       | LED .3w A19 Dog Shape, Base Down, Yellow       | 120     | 0.3        | —                  | 20     | 66.7 | E26  | >80 | Yellow            | Clear      | 12            |
|                                                             |           |                                                |         |            |                    |        |      |      |     |                   |            |               |
| FA19HEARTBD                                                 | A19       | LED .3w A19 Heart Shape, Base Down, 2700K      | 120     | 0.3        | —                  | 20     | 66.7 | E26  | >80 | 2700K             | Clear      | 12            |
|                                                             |           |                                                |         |            |                    |        |      |      |     |                   |            |               |
| FA19HEARTBU                                                 | A19       | LED .3w A19 Heart Shape, Base Up, 2700K        | 120     | 0.3        | —                  | 20     | 66.7 | E26  | >80 | 2700K             | Clear      | 12            |
|                                                             |           |                                                |         |            |                    |        |      |      |     |                   |            |               |
| FA19HEARTRBD                                                | A19       | LED .3w A19 Heart Shape, Base Down, Red        | 120     | 0.3        | —                  | 5      | 16.7 | E26  | >80 | Red               | Clear      | 12            |
|                                                             |           |                                                |         |            |                    |        |      |      |     |                   |            |               |
| FA19REINDEERBD                                              | A19       | LED .3w A19 Reindeer Shape, Base Down, 5000K   | 120     | 0.3        | —                  | 30     | 100  | E26  | >80 | 5000K             | Clear      | 12            |
|                                                             |           |                                                |         |            |                    |        |      |      |     |                   |            |               |
| FA19SNOWBD                                                  | A19       | LED .3w A19 Snowflake Shape, Base Down, 5000K  | 120     | 0.3        | —                  | 30     | 100  | E26  | >80 | 5000K             | Clear      | 12            |
|                                                             |           |                                                |         |            |                    |        |      |      |     |                   |            |               |
| FA19SNOWMANBD                                               | A19       | LED .3w A19 Snowman Shape, Base Down, 5000K    | 120     | 0.3        | —                  | 30     | 100  | E26  | >80 | 5000K             | Clear      | 12            |
|                                                             |           |                                                |         |            |                    |        |      |      |     |                   |            |               |
| FA19STARBD                                                  | A19       | LED .3w A19 Star Shape, Base Down, Blue        | 120     | 0.3        | —                  | 3      | 10   | E26  | >80 | Blue              | Clear      | 12            |



BUTTERFLY



CAT



DOG



HEART BASE UP



HEART BASE DOWN



REINDEER



SNOW



SNOWMAN



BLUE STAR

| Item Number | Lamp Type | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | LPW | Base | CRI | Color Temperature | Glass Type | Case Quantity |
|-------------|-----------|------------------|---------|------------|--------------------|--------|-----|------|-----|-------------------|------------|---------------|
|-------------|-----------|------------------|---------|------------|--------------------|--------|-----|------|-----|-------------------|------------|---------------|

## 15,000 HOUR LED SHAPE FILAMENT LAMPS, NON DIMMABLE

### NON DIMMABLE LED SHAPE FILAMENT A19, CLEAR, E26 BASE



RED STAR

|             |     |                                        |     |     |   |   |      |     |     |     |       |    |
|-------------|-----|----------------------------------------|-----|-----|---|---|------|-----|-----|-----|-------|----|
| FA19STARRBD | A19 | LED .3w A19 Star Shape, Base Down, Red | 120 | 0.3 | — | 4 | 13.3 | E26 | >80 | Red | Clear | 12 |
|-------------|-----|----------------------------------------|-----|-----|---|---|------|-----|-----|-----|-------|----|



STAR, 5000K

|             |     |                                          |     |     |   |    |      |     |     |       |       |    |
|-------------|-----|------------------------------------------|-----|-----|---|----|------|-----|-----|-------|-------|----|
| FA19STARWBD | A19 | LED .3w A19 Star Shape, Base Down, 5000K | 120 | 0.3 | — | 25 | 83.3 | E26 | >80 | 5000K | Clear | 12 |
|-------------|-----|------------------------------------------|-----|-----|---|----|------|-----|-----|-------|-------|----|



GREEN TREE

|              |     |                                          |     |     |   |    |    |     |     |       |       |    |
|--------------|-----|------------------------------------------|-----|-----|---|----|----|-----|-----|-------|-------|----|
| FA19XMTREEBD | A19 | LED .3w A19 Tree Shape, Base Down, Green | 120 | 0.3 | — | 15 | 50 | E26 | >80 | Green | Clear | 12 |
|--------------|-----|------------------------------------------|-----|-----|---|----|----|-----|-----|-------|-------|----|



RED TREE

|               |     |                                        |     |     |   |   |     |     |     |     |       |    |
|---------------|-----|----------------------------------------|-----|-----|---|---|-----|-----|-----|-----|-------|----|
| FA19XMTREERBD | A19 | LED .3w A19 Tree Shape, Base Down, Red | 120 | 0.3 | — | 2 | 6.7 | E26 | >80 | Red | Clear | 12 |
|---------------|-----|----------------------------------------|-----|-----|---|---|-----|-----|-----|-----|-------|----|

### NON DIMMABLE LED SHAPE FILAMENT G40, CLEAR, E26 BASE



ARROW

|             |     |                                           |     |   |   |    |    |     |     |        |       |    |
|-------------|-----|-------------------------------------------|-----|---|---|----|----|-----|-----|--------|-------|----|
| FG40ARROWBD | G40 | LED 1w G40 Arrow Shape, Base Down, Yellow | 120 | 1 | — | 60 | 60 | E26 | >80 | Yellow | Clear | 12 |
|-------------|-----|-------------------------------------------|-----|---|---|----|----|-----|-----|--------|-------|----|



CACTUS

|              |     |                                           |     |   |   |    |    |     |     |       |       |    |
|--------------|-----|-------------------------------------------|-----|---|---|----|----|-----|-----|-------|-------|----|
| FG40CACTUSBD | G40 | LED 1w G40 Cactus Shape, Base Down, Green | 120 | 1 | — | 89 | 89 | E26 | >80 | Green | Clear | 12 |
|--------------|-----|-------------------------------------------|-----|---|---|----|----|-----|-----|-------|-------|----|



HOME BASE DOWN

|            |     |                                         |     |   |   |    |    |     |     |       |       |    |
|------------|-----|-----------------------------------------|-----|---|---|----|----|-----|-----|-------|-------|----|
| FG40HOMEBD | G40 | LED 1w G40 Home Shape, Base Down, 2700K | 120 | 1 | — | 50 | 50 | E26 | >80 | 2700K | Clear | 12 |
|------------|-----|-----------------------------------------|-----|---|---|----|----|-----|-----|-------|-------|----|



HOME BASE UP

|            |     |                                       |     |   |   |    |    |     |     |       |       |    |
|------------|-----|---------------------------------------|-----|---|---|----|----|-----|-----|-------|-------|----|
| FG40HOMEBU | G40 | LED 1w G40 Home Shape, Base Up, 2700K | 120 | 1 | — | 60 | 60 | E26 | >80 | 2700K | Clear | 12 |
|------------|-----|---------------------------------------|-----|---|---|----|----|-----|-----|-------|-------|----|



LOVE BASE DOWN

|            |     |                                         |     |   |   |    |    |     |     |       |       |    |
|------------|-----|-----------------------------------------|-----|---|---|----|----|-----|-----|-------|-------|----|
| FG40LOVEBD | G40 | LED 1w G40 Love Shape, Base Down, 2700K | 120 | 1 | — | 60 | 60 | E26 | >80 | 2700K | Clear | 12 |
|------------|-----|-----------------------------------------|-----|---|---|----|----|-----|-----|-------|-------|----|



LOVE BASE UP

|            |     |                                       |     |   |   |    |    |     |     |       |       |    |
|------------|-----|---------------------------------------|-----|---|---|----|----|-----|-----|-------|-------|----|
| FG40LOVEBU | G40 | LED 1w G40 Love Shape, Base Up, 2700K | 120 | 1 | — | 60 | 60 | E26 | >80 | 2700K | Clear | 12 |
|------------|-----|---------------------------------------|-----|---|---|----|----|-----|-----|-------|-------|----|

| Item Number                                                    | Lamp Type | Item Description                       | Voltage | Lamp Watts | Wattage Equivalent | Lumens | LPW  | Base | CRI | Color Temperature | Glass Type | Case Quantity |
|----------------------------------------------------------------|-----------|----------------------------------------|---------|------------|--------------------|--------|------|------|-----|-------------------|------------|---------------|
| <b>15,000 HOUR LED FILAMENT A-LAMPS, DIMMABLE</b>              |           |                                        |         |            |                    |        |      |      |     |                   |            |               |
| <b>DIMMABLE LED 3.5W A15 FILAMENT, E26 BASE</b>                |           |                                        |         |            |                    |        |      |      |     |                   |            |               |
| FA15D2527EC                                                    | A15       | Dim LED 3.5w A15, 27K Clear            | 120     | 3.5        | 25W                | 250    | 100  | E26  | 80  | 2700              | Clear      | 12            |
| FA15D2527EW                                                    | A15       | Dim LED 3.5w A15, 27K Frosted          | 120     | 3.5        | 25W                | 250    | 100  | E26  | 80  | 2700              | Clear      | 12            |
| FA15D2527H                                                     | A15       | Dim LED 3.5w A15 Horizontal, 27K Clear | 120     | 3.0        | 25W                | 200    | 66.7 | E26  | 80  | 2700              | Clear      | 12            |
| FA15D2527V                                                     | A15       | Dim LED 3.5w A15 Vertical, 27K Clear   | 120     | 3.0        | 25W                | 200    | 66.7 | E26  | 80  | 2700              | Clear      | 12            |
| <b>DIMMABLE LED 4.5W A19 FILAMENT, E26 BASE</b>                |           |                                        |         |            |                    |        |      |      |     |                   |            |               |
| FA19D4022KC                                                    | A19       | Dim LED 4.5w A19, 22K Clear            | 120     | 4.5        | 40W                | 425    | 94   | E26  | 80  | 2200              | Clear      | 12            |
| FA19D4027KC                                                    | A19       | Dim LED 4.5w A19, 27K Clear            | 120     | 4.5        | 40W                | 450    | 100  | E26  | 80  | 2700              | Clear      | 12            |
| FA19D4027EW                                                    | A19       | Dim LED 4.5w A19, 27K Frosted          | 120     | 4.5        | 40W                | 450    | 100  | E26  | 80  | 2700              | Frosted    | 12            |
| FA19D4040EC                                                    | A19       | Dim LED 4.5w A19, 40K Clear            | 120     | 4.5        | 40W                | 450    | 100  | E26  | 80  | 4000              | Clear      | 12            |
| FA19D4040EW                                                    | A19       | Dim LED 4.5w A19, 40K Frosted          | 120     | 4.5        | 40W                | 450    | 100  | E26  | 80  | 4000              | Frosted    | 12            |
| FA19D4050EC                                                    | A19       | Dim LED 4.5w A19, 50K Clear            | 120     | 4.5        | 40W                | 450    | 100  | E26  | 80  | 5000              | Clear      | 12            |
| FA19D4050EW                                                    | A19       | Dim LED 4.5w A19, 50K Frosted          | 120     | 4.5        | 40W                | 450    | 100  | E26  | 80  | 5000              | Frosted    | 12            |
| <b>DIMMABLE LED 4.5W A19 FILAMENT, COLORED GLASS, E26 BASE</b> |           |                                        |         |            |                    |        |      |      |     |                   |            |               |
| FA19D40BC                                                      | A19       | Dim LED 4.5w A19, Clear Blue           | 120     | 4.5        | 40W                | Blue   | –    | E26  | 80  | Blue              | Blue       | 12            |
| FA19D40YC                                                      | A19       | Dim LED 4.5w A19, Clear Yellow         | 120     | 4.5        | 40W                | Yellow | –    | E26  | 80  | Yellow            | Yellow     | 12            |
| <b>DIMMABLE LED 8W A19 FILAMENT, E26 BASE</b>                  |           |                                        |         |            |                    |        |      |      |     |                   |            |               |
| FA19D6022KC                                                    | A19       | Dim LED 8w A19, 22K Clear              | 120     | 8          | 60W                | 775    | 97   | E26  | 80  | 2200              | Clear      | 12            |
| FA19D6022KW                                                    | A19       | Dim LED 8w A19, 22K Frosted            | 120     | 8          | 60W                | 775    | 97   | E26  | 80  | 2200              | Frosted    | 12            |
| FA19D6027EC                                                    | A19       | Dim LED 8w A19, 27K Clear              | 120     | 8          | 60W                | 800    | 100  | E26  | 80  | 2700              | Clear      | 12            |
| FA19D6027EW                                                    | A19       | Dim LED 8w A19, 27K Frosted            | 120     | 8          | 60W                | 800    | 100  | E26  | 80  | 2700              | Frosted    | 12            |
| FA19D6030EC                                                    | A19       | Dim LED 8w A19, 30K Clear              | 120     | 8          | 60W                | 800    | 100  | E26  | 80  | 3000              | Clear      | 12            |
| FA19D6030EW                                                    | A19       | Dim LED 8w A19, 30K Frosted            | 120     | 8          | 60W                | 800    | 100  | E26  | 80  | 3000              | Frosted    | 12            |
| FA19D6040EC                                                    | A19       | Dim LED 8w A19, 40K Clear              | 120     | 8          | 60W                | 800    | 100  | E26  | 80  | 4000              | Clear      | 12            |
| FA19D6040EW                                                    | A19       | Dim LED 8w A19, 40K Frosted            | 120     | 8          | 60W                | 800    | 100  | E26  | 80  | 4000              | Frosted    | 12            |
| FA19D6050EC                                                    | A19       | Dim LED 8w A19, 50K Clear              | 120     | 8          | 60W                | 800    | 100  | E26  | 80  | 5000              | Clear      | 12            |
| FA19D6050EW                                                    | A19       | Dim LED 8w A19, 50K Frosted            | 120     | 8          | 60W                | 800    | 100  | E26  | 80  | 5000              | Frosted    | 12            |
| <b>DIMMABLE LED 8W A19 FILAMENT, SILVER BOWL, E26 BASE</b>     |           |                                        |         |            |                    |        |      |      |     |                   |            |               |
| FA19D6027SB                                                    | A19       | Dim LED 8w A19, 27K Silver Bowl        | 120     | 8          | 60W                | 650    | 81.3 | E26  | 80  | 2700              | Clear      | 12            |
| <b>DIMMABLE LED 8W A19 FILAMENT, COLORED GLASS, E26 BASE</b>   |           |                                        |         |            |                    |        |      |      |     |                   |            |               |
| FA19D60BC                                                      | A19       | Dim LED 8w A19, Clear Blue             | 120     | 8          | 40W                | Blue   | –    | E26  | 80  | Blue              | Blue       | 12            |
| FA19D60YC                                                      | A19       | Dim LED 8w A19, Clear Yellow           | 120     | 8          | 40W                | Yellow | –    | E26  | 80  | Yellow            | Yellow     | 12            |



FA15, Clear



FA15, Frosted



FA15, Horizontal



FA15, Vertical



FA19, Clear



FA19, Frosted



FA19, Clear Blue



FA19, Clear Yellow



FA19, Silver Bowl

**AMBERGLOW 15,000 HOUR LED 24K CLASSIC WHITE FILAMENT LAMPS, DIMMABLE**
**DIMMABLE LED 3W B11 FILAMENT, E12 BASE**


|                   |     |                                  |     |   |     |     |      |     |    |      |       |    |
|-------------------|-----|----------------------------------|-----|---|-----|-----|------|-----|----|------|-------|----|
| FB11D2524E12SCL92 | B11 | Dim LED 3w B11, 24K Clear, 92CRI | 120 | 3 | 25W | 250 | 83.3 | E12 | 92 | 2400 | Clear | 12 |
| FB11D2524E12SFR92 | B11 | Dim LED 3w B11, 24K Frost, 92CRI | 120 | 3 | 25W | 250 | 83.3 | E12 | 92 | 2400 | Frost | 12 |

**DIMMABLE LED 3W B11 FILAMENT, E26 BASE**


|                   |     |                                  |     |   |     |     |      |     |    |      |       |    |
|-------------------|-----|----------------------------------|-----|---|-----|-----|------|-----|----|------|-------|----|
| FB11D2524E26SCL92 | B11 | Dim LED 3w B11, 24K Clear, 92CRI | 120 | 3 | 25W | 250 | 83.3 | E26 | 92 | 2400 | Clear | 12 |
| FB11D2524E26SFR92 | B11 | Dim LED 3w B11, 24K Frost, 92CRI | 120 | 3 | 25W | 250 | 83.3 | E26 | 92 | 2400 | Frost | 12 |

**DIMMABLE LED 4W B11 FILAMENT, E12 BASE**


|                   |     |                                  |     |   |     |     |    |     |    |      |       |    |
|-------------------|-----|----------------------------------|-----|---|-----|-----|----|-----|----|------|-------|----|
| FB11D4024E12SCL92 | B11 | Dim LED 4w B11, 24K Clear, 92CRI | 120 | 4 | 40W | 300 | 75 | E12 | 92 | 2400 | Clear | 12 |
| FB11D4024E12SFR92 | B11 | Dim LED 4w B11, 24K Frost, 92CRI | 120 | 4 | 40W | 300 | 75 | E12 | 92 | 2400 | Frost | 12 |

**DIMMABLE LED 4W B11 FILAMENT, E26 BASE**


|                   |     |                                  |     |   |     |     |    |     |    |      |       |    |
|-------------------|-----|----------------------------------|-----|---|-----|-----|----|-----|----|------|-------|----|
| FB11D4024E26SCL92 | B11 | Dim LED 4w B11, 24K Clear, 92CRI | 120 | 4 | 40W | 300 | 75 | E26 | 92 | 2400 | Clear | 12 |
| FB11D4024E26SFR92 | B11 | Dim LED 4w B11, 24K Frost, 92CRI | 120 | 4 | 40W | 300 | 75 | E26 | 92 | 2400 | Frost | 12 |

**DIMMABLE LED 5W B11 FILAMENT, E12 BASE**


|                   |     |                                  |     |   |     |     |     |     |    |      |       |    |
|-------------------|-----|----------------------------------|-----|---|-----|-----|-----|-----|----|------|-------|----|
| FB11D6024E12SCL92 | B11 | Dim LED 5w B11, 24K Clear, 92CRI | 120 | 5 | 60W | 500 | 100 | E12 | 92 | 2400 | Clear | 12 |
| FB11D6024E12SFR92 | B11 | Dim LED 5w B11, 24K Frost, 92CRI | 120 | 5 | 60W | 500 | 100 | E12 | 92 | 2400 | Frost | 12 |

**DIMMABLE LED 5W B11 FILAMENT, E26 BASE**


|                   |     |                                  |     |   |     |     |     |     |    |      |       |    |
|-------------------|-----|----------------------------------|-----|---|-----|-----|-----|-----|----|------|-------|----|
| FB11D6024E26SCL92 | B11 | Dim LED 5w B11, 24K Clear, 92CRI | 120 | 5 | 60W | 500 | 100 | E26 | 92 | 2400 | Clear | 12 |
| FB11D6024E26SFR92 | B11 | Dim LED 5w B11, 24K Frost, 92CRI | 120 | 5 | 60W | 500 | 100 | E26 | 92 | 2400 | Frost | 12 |

**DIMMABLE LED 3W F11 FILAMENT, E12 BASE**



|                   |     |                                  |     |   |     |     |      |     |    |      |       |    |
|-------------------|-----|----------------------------------|-----|---|-----|-----|------|-----|----|------|-------|----|
| FF11D2524E12SCL92 | F11 | Dim LED 3w F11, 24K Clear, 92CRI | 120 | 3 | 25W | 250 | 83.3 | E12 | 92 | 2400 | Clear | 12 |
| FF11D2524E12SFR92 | F11 | Dim LED 3w F11, 24K Frost, 92CRI | 120 | 3 | 25W | 250 | 83.3 | E12 | 92 | 2400 | Frost | 12 |

**DIMMABLE LED 3W F11 FILAMENT, E26 BASE**


|                   |     |                                  |     |   |     |     |      |     |    |      |       |    |
|-------------------|-----|----------------------------------|-----|---|-----|-----|------|-----|----|------|-------|----|
| FF11D2524E26SCL92 | F11 | Dim LED 3w F11, 24K Clear, 92CRI | 120 | 3 | 25W | 250 | 83.3 | E26 | 92 | 2400 | Clear | 12 |
| FF11D2524E26SFR92 | F11 | Dim LED 3w F11, 24K Frost, 92CRI | 120 | 3 | 25W | 250 | 83.3 | E26 | 92 | 2400 | Frost | 12 |

**DIMMABLE LED 4W F11 FILAMENT, E12 BASE**


|                   |     |                                  |     |   |     |     |    |     |    |      |       |    |
|-------------------|-----|----------------------------------|-----|---|-----|-----|----|-----|----|------|-------|----|
| FF11D4024E12SCL92 | F11 | Dim LED 4w F11, 24K Clear, 92CRI | 120 | 4 | 40W | 300 | 75 | E12 | 92 | 2400 | Clear | 12 |
| FF11D4024E12SFR92 | F11 | Dim LED 4w F11, 24K Frost, 92CRI | 120 | 4 | 40W | 300 | 75 | E12 | 92 | 2400 | Frost | 12 |

**DIMMABLE LED 4W F11 FILAMENT, E26 BASE**


|                   |     |                                  |     |   |     |     |    |     |    |      |       |    |
|-------------------|-----|----------------------------------|-----|---|-----|-----|----|-----|----|------|-------|----|
| FF11D4024E26SCL92 | F11 | Dim LED 4w F11, 24K Clear, 92CRI | 120 | 4 | 40W | 300 | 75 | E26 | 92 | 2400 | Clear | 12 |
| FF11D4024E26SFR92 | F11 | Dim LED 4w F11, 24K Frost, 92CRI | 120 | 4 | 40W | 300 | 75 | E26 | 92 | 2400 | Frost | 12 |

**DIMMABLE LED 5W F11 FILAMENT, E12 BASE**

|                   |     |                                  |     |   |     |     |     |     |    |      |       |    |
|-------------------|-----|----------------------------------|-----|---|-----|-----|-----|-----|----|------|-------|----|
| FF11D6024E12SCL92 | F11 | Dim LED 5w F11, 24K Clear, 92CRI | 120 | 5 | 60W | 500 | 100 | E12 | 92 | 2400 | Clear | 12 |
| FF11D6024E12SFR92 | F11 | Dim LED 5w F11, 24K Frost, 92CRI | 120 | 5 | 60W | 500 | 100 | E12 | 92 | 2400 | Frost | 12 |

**DIMMABLE LED 5W F11 FILAMENT, E26 BASE**

|                   |     |                                  |     |   |     |     |     |     |    |      |       |    |
|-------------------|-----|----------------------------------|-----|---|-----|-----|-----|-----|----|------|-------|----|
| FF11D6024E26SCL92 | F11 | Dim LED 5w F11, 24K Clear, 92CRI | 120 | 5 | 60W | 500 | 100 | E26 | 92 | 2400 | Clear | 12 |
| FF11D6024E26SFR92 | F11 | Dim LED 5w F11, 24K Frost, 92CRI | 120 | 5 | 60W | 500 | 100 | E26 | 92 | 2400 | Frost | 12 |

| Item Number                                     | Lamp Type | Item Description                   | Voltage | Lamp Watts | Wattage Equivalent | Lumens | LPW  | Base | CRI | Color Temperature | Glass Type | Case Quantity |
|-------------------------------------------------|-----------|------------------------------------|---------|------------|--------------------|--------|------|------|-----|-------------------|------------|---------------|
| <b>DIMMABLE LED 4.5W A19 FILAMENT, E26 BASE</b> |           |                                    |         |            |                    |        |      |      |     |                   |            |               |
| FA19D4024E26SCL92                               | A19       | Dim LED 4.5w A19, 24K Clear, 92CRI | 120     | 4.5        | 40W                | 450    | 100  | E26  | 92  | 2400              | Clear      | 12            |
| FA19D4024E26SFR92                               | A19       | Dim LED 4.5w A19, 24K Frost, 92CRI | 120     | 4.5        | 40W                | 450    | 100  | E26  | 92  | 2400              | Frost      | 12            |
| <b>DIMMABLE LED 8W A19 FILAMENT, E26 BASE</b>   |           |                                    |         |            |                    |        |      |      |     |                   |            |               |
| FA19D6024E26SCL92                               | A19       | Dim LED 8w A19, 24K Clear, 92CRI   | 120     | 8          | 60W                | 800    | 100  | E26  | 92  | 2400              | Clear      | 12            |
| FA19D6024E26SFR92                               | A19       | Dim LED 8w A19, 24K Frost, 92CRI   | 120     | 8          | 60W                | 800    | 100  | E26  | 92  | 2400              | Frost      | 12            |
| <b>DIMMABLE LED 5W ST19 FILAMENT, E26 BASE</b>  |           |                                    |         |            |                    |        |      |      |     |                   |            |               |
| FST19D4024E26SCL92                              | ST19      | Dim LED 5w ST19, 24K Clear, 92CRI  | 120     | 5          | 40W                | 450    | 90   | E26  | 92  | 2400              | Clear      | 12            |
| FST19D4024E26SFR92                              | ST19      | Dim LED 5w ST19, 24K Frost, 92CRI  | 120     | 5          | 40W                | 450    | 90   | E26  | 92  | 2400              | Frost      | 12            |
| <b>DIMMABLE LED 4.5W G40 FILAMENT, E26 BASE</b> |           |                                    |         |            |                    |        |      |      |     |                   |            |               |
| FG40D4024E26SCL92                               | G40       | Dim LED 4.5w G40, 24K Clear, 92CRI | 120     | 4.5        | 40W                | 450    | 100  | E26  | 92  | 2400              | Clear      | 12            |
| FG40D4024E26SFR92                               | G40       | Dim LED 4.5w G40, 24K Frost, 92CRI | 120     | 4.5        | 40W                | 450    | 100  | E26  | 92  | 2400              | Frost      | 12            |
| <b>DIMMABLE LED 4W G25 FILAMENT, E26 BASE</b>   |           |                                    |         |            |                    |        |      |      |     |                   |            |               |
| FG40D4024E26SCL92                               | G25       | Dim LED 4.5w G25, 24K Clear, 92CRI | 120     | 4.5        | 40W                | 450    | 100  | E26  | 92  | 2400              | Clear      | 12            |
| FG40D4024E26SFR92                               | G25       | Dim LED 4.5w G25, 24K Frost, 92CRI | 120     | 4.5        | 40W                | 450    | 100  | E26  | 92  | 2400              | Frost      | 12            |
| <b>DIMMABLE LED 3W G16 DECO, E12 BASE</b>       |           |                                    |         |            |                    |        |      |      |     |                   |            |               |
| FG16D2524E12SCL92                               | G16       | Dim LED 3w G16, 24K Clear, 92CRI   | 120     | 3          | 25W                | 250    | 83.3 | E12  | 92  | 2400              | Clear      | 12            |
| FG16D2524E12SFR92                               | G16       | Dim LED 3w G16, 24K Frost, 92CRI   | 120     | 3          | 25W                | 250    | 83.3 | E12  | 92  | 2400              | Frost      | 12            |
| <b>DIMMABLE LED 3W G16 DECO, E26 BASE</b>       |           |                                    |         |            |                    |        |      |      |     |                   |            |               |
| FG16D2524E26SCL92                               | G16       | Dim LED 3w G16, 24K Clear, 92CRI   | 120     | 3          | 25W                | 250    | 83.3 | E26  | 92  | 2400              | Clear      | 12            |
| FG16D2524E26SFR92                               | G16       | Dim LED 3w G16, 24K Frost, 92CRI   | 120     | 3          | 25W                | 250    | 83.3 | E26  | 92  | 2400              | Frost      | 12            |
| <b>DIMMABLE LED 4W G16 DECO, E12 BASE</b>       |           |                                    |         |            |                    |        |      |      |     |                   |            |               |
| FG16D4024E12SCL92                               | G16       | Dim LED 4w G16, 24K Clear, 92CRI   | 120     | 4          | 40W                | 350    | 87.5 | E12  | 92  | 2400              | Clear      | 12            |
| FG16D4024E12SFR92                               | G16       | Dim LED 4w G16, 24K Frost, 92CRI   | 120     | 4          | 40W                | 350    | 87.5 | E12  | 92  | 2400              | Frost      | 12            |
| <b>DIMMABLE LED 4W G16 DECO, E26 BASE</b>       |           |                                    |         |            |                    |        |      |      |     |                   |            |               |
| FG16D4024E26SCL92                               | G16       | Dim LED 4w G16, 24K Clear, 92CRI   | 120     | 4          | 40W                | 350    | 87.5 | E26  | 92  | 2400              | Clear      | 12            |
| FG16D4024E26SFR92                               | G16       | Dim LED 4w G16, 24K Frost, 92CRI   | 120     | 4          | 40W                | 350    | 87.5 | E26  | 92  | 2400              | Frost      | 12            |



| Item Number | Lamp Type | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | LPW | Base | CRI | Color Temperature | Case Quantity |
|-------------|-----------|------------------|---------|------------|--------------------|--------|-----|------|-----|-------------------|---------------|
|-------------|-----------|------------------|---------|------------|--------------------|--------|-----|------|-----|-------------------|---------------|

## 15,000 HOUR GOOD LIFE WARM DIMMING LED FILAMENT LAMPS

### DIMMABLE LED 3.5W A15 LAMP, 27K - 18K, E26 BASE



|             |     |                              |     |     |     |     |      |     |     |           |    |
|-------------|-----|------------------------------|-----|-----|-----|-----|------|-----|-----|-----------|----|
| FA15D25GL27 | A15 | Dim LED 3.5w FIL A15,27K-18K | 120 | 3.5 | 25W | 300 | 85.7 | E26 | >80 | 3200-1800 | 12 |
|-------------|-----|------------------------------|-----|-----|-----|-----|------|-----|-----|-----------|----|

### DIMMABLE LED 8W A19 LAMP, 27K - 18K, E26 BASE



|             |     |                            |     |   |     |     |     |     |    |           |    |
|-------------|-----|----------------------------|-----|---|-----|-----|-----|-----|----|-----------|----|
| FA19D60GL27 | A19 | Dim LED 8w FIL A19,27K-18K | 120 | 8 | 60W | 800 | 100 | E26 | 80 | 2700-1800 | 12 |
|-------------|-----|----------------------------|-----|---|-----|-----|-----|-----|----|-----------|----|

### DIMMABLE LED 8W A19 LAMP, 32K - 18K, E26 BASE

|            |     |                            |     |   |     |     |     |     |    |           |    |
|------------|-----|----------------------------|-----|---|-----|-----|-----|-----|----|-----------|----|
| FA19D60GL1 | A19 | Dim LED 8w FIL A19,32K-18K | 120 | 8 | 60W | 800 | 100 | E26 | 80 | 3200-1800 | 12 |
|------------|-----|----------------------------|-----|---|-----|-----|-----|-----|----|-----------|----|

### DIMMABLE LED 5W R20 LAMP, 27K - 18K, E26 BASE



|             |     |                            |     |   |     |     |    |     |     |           |    |
|-------------|-----|----------------------------|-----|---|-----|-----|----|-----|-----|-----------|----|
| FR20D50GL27 | R20 | Dim LED 5w FIL R20,27K-18K | 120 | 5 | 50W | 450 | 90 | E26 | >80 | 2700-1800 | 12 |
|-------------|-----|----------------------------|-----|---|-----|-----|----|-----|-----|-----------|----|

### DIMMABLE LED 8W BR30 LAMP, 27K - 18K, E26 BASE



|              |      |                              |     |   |     |     |      |     |    |           |    |
|--------------|------|------------------------------|-----|---|-----|-----|------|-----|----|-----------|----|
| FBR30D65GL27 | BR30 | Dim LED 8w FIL BR30, 27K-18K | 120 | 8 | 65W | 650 | 81.3 | E26 | 80 | 2700-1800 | 12 |
|--------------|------|------------------------------|-----|---|-----|-----|------|-----|----|-----------|----|

### DIMMABLE LED 8W BR30 LAMP, 32K - 18K, E26 BASE

|             |      |                              |     |   |     |     |      |     |    |           |    |
|-------------|------|------------------------------|-----|---|-----|-----|------|-----|----|-----------|----|
| FBR30D65GL1 | BR30 | Dim LED 8w FIL BR30, 32K-18K | 120 | 8 | 65W | 650 | 81.3 | E26 | 80 | 3200-1800 | 12 |
|-------------|------|------------------------------|-----|---|-----|-----|------|-----|----|-----------|----|

### DIMMABLE LED 5W CANDELABRA LAMP, 27K - 18K, E12 BASE



|               |     |                            |     |   |     |     |     |     |    |           |    |
|---------------|-----|----------------------------|-----|---|-----|-----|-----|-----|----|-----------|----|
| FB11D60FRGL27 | B11 | Dim LED 5w FIL B11,27K-18K | 120 | 5 | 60W | 500 | 100 | E12 | 80 | 2700-1800 | 12 |
|---------------|-----|----------------------------|-----|---|-----|-----|-----|-----|----|-----------|----|

### DIMMABLE LED 5W CANDELABRA LAMP, 32K - 18K, E12 BASE

|              |     |                            |     |   |     |     |     |     |    |           |    |
|--------------|-----|----------------------------|-----|---|-----|-----|-----|-----|----|-----------|----|
| FB11D60FRGL1 | B11 | Dim LED 5w FIL B11,32K-18K | 120 | 5 | 60W | 500 | 100 | E12 | 80 | 3200-1800 | 12 |
|--------------|-----|----------------------------|-----|---|-----|-----|-----|-----|----|-----------|----|



|              |     |                            |     |   |     |     |     |     |    |           |    |
|--------------|-----|----------------------------|-----|---|-----|-----|-----|-----|----|-----------|----|
| FF11D60FRGL1 | F11 | Dim LED 5w FIL F11,32K-18K | 120 | 5 | 60W | 500 | 100 | E12 | 80 | 3200-1800 | 12 |
|--------------|-----|----------------------------|-----|---|-----|-----|-----|-----|----|-----------|----|

### DIMMABLE LED 4W CANDELABRA LAMP, 27K - 18K, E12 BASE

|                |     |                            |     |   |     |     |      |     |    |           |    |
|----------------|-----|----------------------------|-----|---|-----|-----|------|-----|----|-----------|----|
| FB11D40FRGL127 | B11 | Dim LED 4w FIL B11,27K-18K | 120 | 4 | 40W | 250 | 62.5 | E12 | 80 | 2700-1800 | 12 |
|----------------|-----|----------------------------|-----|---|-----|-----|------|-----|----|-----------|----|

### DIMMABLE LED 5W G25 LAMP, 27K - 18K, E26 BASE



|             |     |                            |     |   |     |     |     |     |    |           |    |
|-------------|-----|----------------------------|-----|---|-----|-----|-----|-----|----|-----------|----|
| FG25D60GL27 | G25 | Dim LED 5w FIL G25,27K-18K | 120 | 5 | 40W | 500 | 100 | E26 | 80 | 2700-1800 | 12 |
|-------------|-----|----------------------------|-----|---|-----|-----|-----|-----|----|-----------|----|

### DIMMABLE LED 3W G25 LAMP, 27K - 18K, E26 BASE

|             |     |                            |     |   |     |     |      |     |    |           |    |
|-------------|-----|----------------------------|-----|---|-----|-----|------|-----|----|-----------|----|
| FG25D25GL27 | G25 | Dim LED 3w FIL G25,27K-18K | 120 | 3 | 25W | 250 | 83.3 | E26 | 80 | 2700-1800 | 12 |
|-------------|-----|----------------------------|-----|---|-----|-----|------|-----|----|-----------|----|

### DIMMABLE LED 5W G25 LAMP, 32K - 18K, E26 BASE

|            |     |                            |     |   |     |     |     |     |    |           |    |
|------------|-----|----------------------------|-----|---|-----|-----|-----|-----|----|-----------|----|
| FG25D60GL1 | G25 | Dim LED 5w FIL G25,32K-18K | 120 | 5 | 40W | 500 | 100 | E26 | 80 | 3200-1800 | 12 |
|------------|-----|----------------------------|-----|---|-----|-----|-----|-----|----|-----------|----|

### DIMMABLE LED 8W G40 LAMP, 32K - 18K, E26 BASE



|            |     |                            |     |   |     |     |     |     |    |           |    |
|------------|-----|----------------------------|-----|---|-----|-----|-----|-----|----|-----------|----|
| FG40D60GL1 | G40 | Dim LED 8w FIL G40,32K-18K | 120 | 8 | 60W | 800 | 100 | E26 | 80 | 3200-1800 | 12 |
|------------|-----|----------------------------|-----|---|-----|-----|-----|-----|----|-----------|----|

### DIMMABLE LED 8W ST19 LAMP, 27K - 18K, E26 BASE



|              |      |                             |     |   |     |     |      |     |    |           |    |
|--------------|------|-----------------------------|-----|---|-----|-----|------|-----|----|-----------|----|
| FST19D60GL27 | ST19 | Dim LED 8w FIL ST19,27K-18K | 120 | 8 | 60W | 500 | 62.5 | E26 | 80 | 2700-1800 | 12 |
|--------------|------|-----------------------------|-----|---|-----|-----|------|-----|----|-----------|----|

### DIMMABLE LED 8W ST19 LAMP, 32K - 18K, E26 BASE

|             |      |                             |     |   |     |     |      |     |    |           |    |
|-------------|------|-----------------------------|-----|---|-----|-----|------|-----|----|-----------|----|
| FST19D60GL1 | ST19 | Dim LED 8w FIL ST19,32K-18K | 120 | 8 | 60W | 500 | 62.5 | E26 | 80 | 3200-1800 | 12 |
|-------------|------|-----------------------------|-----|---|-----|-----|------|-----|----|-----------|----|

| Item Number | Lamp Type | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | LPW | Base | CRI | Color Temperature | Glass Type | Case Quantity |
|-------------|-----------|------------------|---------|------------|--------------------|--------|-----|------|-----|-------------------|------------|---------------|
|-------------|-----------|------------------|---------|------------|--------------------|--------|-----|------|-----|-------------------|------------|---------------|

### 15,000 HOUR LED ANTIQUE LIGHT LAMPS, DIMMABLE

#### DIMMABLE LED 4.5W A19 SOFT ANTIQUE CLASSIC FILAMENT, CLEAR, E26 BASE

|             |     |                                        |     |     |     |     |      |     |     |      |       |    |
|-------------|-----|----------------------------------------|-----|-----|-----|-----|------|-----|-----|------|-------|----|
| FA19D4018EC | A19 | Dim LED 4.5w A19, 18K, Clear, E26 Base | 120 | 4.5 | 40W | 325 | 72.2 | E26 | >80 | 1800 | Clear | 12 |
|-------------|-----|----------------------------------------|-----|-----|-----|-----|------|-----|-----|------|-------|----|



#### DIMMABLE LED 4W B11 SOFT ANTIQUE CLASSIC FILAMENT, CLEAR, E12 BASE

|               |     |                                      |     |   |     |     |      |     |     |      |       |    |
|---------------|-----|--------------------------------------|-----|---|-----|-----|------|-----|-----|------|-------|----|
| FB11D4018E12C | B11 | Dim LED 4w B11, 18K, Clear, E12 Base | 120 | 4 | 40W | 210 | 52.5 | E12 | >80 | 1800 | Clear | 12 |
|---------------|-----|--------------------------------------|-----|---|-----|-----|------|-----|-----|------|-------|----|



#### DIMMABLE LED 4W F11 SOFT ANTIQUE CLASSIC FILAMENT, CLEAR, E12 BASE

|               |     |                                      |     |   |     |     |      |     |     |      |       |    |
|---------------|-----|--------------------------------------|-----|---|-----|-----|------|-----|-----|------|-------|----|
| FF11D4018E12C | F11 | Dim LED 4w F11, 18K, Clear, E12 Base | 120 | 4 | 40W | 210 | 52.5 | E12 | >80 | 1800 | Clear | 12 |
|---------------|-----|--------------------------------------|-----|---|-----|-----|------|-----|-----|------|-------|----|



#### DIMMABLE LED 4W G25 SOFT ANTIQUE CLASSIC FILAMENT, CLEAR, E26 BASE

|             |     |                                      |     |   |     |     |      |     |     |      |       |    |
|-------------|-----|--------------------------------------|-----|---|-----|-----|------|-----|-----|------|-------|----|
| FG25D4018EC | G25 | Dim LED 4w G25, 18K, Clear, E26 Base | 120 | 4 | 40W | 210 | 52.5 | E26 | >80 | 1800 | Clear | 12 |
|-------------|-----|--------------------------------------|-----|---|-----|-----|------|-----|-----|------|-------|----|



#### DIMMABLE LED 4.5W ST19 SOFT ANTIQUE CLASSIC FILAMENT, CLEAR, E26 BASE

|              |      |                                       |     |   |     |     |    |     |     |      |       |    |
|--------------|------|---------------------------------------|-----|---|-----|-----|----|-----|-----|------|-------|----|
| FST19D4018EC | ST19 | Dim LED 5w ST19, 18K, Clear, E26 Base | 120 | 5 | 40W | 325 | 65 | E26 | >80 | 1800 | Clear | 12 |
|--------------|------|---------------------------------------|-----|---|-----|-----|----|-----|-----|------|-------|----|



#### DIMMABLE LED 4.5W T10 SOFT ANTIQUE CLASSIC FILAMENT, CLEAR, E26 BASE

|               |     |                                      |     |   |     |     |    |     |     |      |       |    |
|---------------|-----|--------------------------------------|-----|---|-----|-----|----|-----|-----|------|-------|----|
| FT1005D4018EC | T10 | Dim LED 5w T10, 18K, Clear, E26 Base | 120 | 5 | 40W | 315 | 63 | E26 | >80 | 1800 | Clear | 12 |
|---------------|-----|--------------------------------------|-----|---|-----|-----|----|-----|-----|------|-------|----|



#### DIMMABLE LED 3W T6 SOFT ANTIQUE CLASSIC FILAMENT, CLEAR, E12 BASE

|                 |    |                                      |     |   |     |     |    |     |     |      |       |    |
|-----------------|----|--------------------------------------|-----|---|-----|-----|----|-----|-----|------|-------|----|
| FT0603D2518E12C | T6 | Dim LED 55w T6, 18K, Clear, E12 Base | 120 | 3 | 25W | 150 | 50 | E12 | >80 | 1800 | Clear | 12 |
|-----------------|----|--------------------------------------|-----|---|-----|-----|----|-----|-----|------|-------|----|





| Item Number | Lamp Type | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | LPW | Base | CRI | Color Temperature | Glass Type | Case Quantity |
|-------------|-----------|------------------|---------|------------|--------------------|--------|-----|------|-----|-------------------|------------|---------------|
|-------------|-----------|------------------|---------|------------|--------------------|--------|-----|------|-----|-------------------|------------|---------------|

### 15,000 HOUR LED SOFT ANTIQUE SPIRAL LAMPS, DIMMABLE

#### DIMMABLE LED 5W A19 SOFT ANTIQUE SPIRAL FILAMENT, CLEAR, E26 BASE



|             |     |                                             |     |   |     |     |    |     |     |      |       |    |
|-------------|-----|---------------------------------------------|-----|---|-----|-----|----|-----|-----|------|-------|----|
| FA19D2518VC | A19 | Dim LED 5w A19 Spiral, 18K, Clear, E26 Base | 120 | 5 | 25W | 220 | 45 | E26 | >80 | 1800 | Clear | 12 |
|-------------|-----|---------------------------------------------|-----|---|-----|-----|----|-----|-----|------|-------|----|

#### DIMMABLE LED 3W B11 SOFT ANTIQUE SPIRAL FILAMENT, CLEAR, E26 BASE



|             |     |                                             |     |   |     |    |    |     |     |      |       |    |
|-------------|-----|---------------------------------------------|-----|---|-----|----|----|-----|-----|------|-------|----|
| FB10D2518VC | B11 | Dim LED 3w B10 Spiral, 18K, Clear, E26 Base | 120 | 3 | 25W | 90 | 30 | E26 | >80 | 1800 | Clear | 12 |
|-------------|-----|---------------------------------------------|-----|---|-----|----|----|-----|-----|------|-------|----|

#### DIMMABLE LED 5W G30 SOFT ANTIQUE SPIRAL FILAMENT, CLEAR, E26 BASE



|             |     |                                             |     |   |     |     |    |     |     |      |       |    |
|-------------|-----|---------------------------------------------|-----|---|-----|-----|----|-----|-----|------|-------|----|
| FG30D2518VC | G30 | Dim LED 5w G30 Spiral, 18K, Clear, E26 Base | 120 | 5 | 25W | 240 | 48 | E26 | >80 | 1800 | Clear | 12 |
|-------------|-----|---------------------------------------------|-----|---|-----|-----|----|-----|-----|------|-------|----|

#### DIMMABLE LED 5W G40 SOFT ANTIQUE SPIRAL FILAMENT, CLEAR, E26 BASE



|             |     |                                             |     |   |     |     |    |     |     |      |       |    |
|-------------|-----|---------------------------------------------|-----|---|-----|-----|----|-----|-----|------|-------|----|
| FG40D2518VC | G40 | Dim LED 5w G40 Spiral, 18K, Clear, E26 Base | 120 | 5 | 25W | 240 | 48 | E26 | >80 | 1800 | Clear | 12 |
|-------------|-----|---------------------------------------------|-----|---|-----|-----|----|-----|-----|------|-------|----|

#### DIMMABLE LED 5W ST19 SOFT ANTIQUE SPIRAL FILAMENT, CLEAR, E26 BASE



|              |      |                                              |     |   |     |     |    |     |     |      |       |    |
|--------------|------|----------------------------------------------|-----|---|-----|-----|----|-----|-----|------|-------|----|
| FST19D2518VC | ST19 | Dim LED 5w ST19 Spiral, 18K, Clear, E26 Base | 120 | 5 | 25W | 240 | 48 | E26 | >80 | 1800 | Clear | 12 |
|--------------|------|----------------------------------------------|-----|---|-----|-----|----|-----|-----|------|-------|----|

#### DIMMABLE LED 5W T9 SOFT ANTIQUE SPIRAL FILAMENT, CLEAR, E26 BASE



|             |    |                                            |     |   |     |     |    |     |     |      |       |    |
|-------------|----|--------------------------------------------|-----|---|-----|-----|----|-----|-----|------|-------|----|
| FT09D2518VC | T9 | Dim LED 5w T9 Spiral, 18K, Clear, E26 Base | 120 | 5 | 25W | 240 | 48 | E26 | >80 | 1800 | Clear | 12 |
|-------------|----|--------------------------------------------|-----|---|-----|-----|----|-----|-----|------|-------|----|

| Item Number                                               | Lamp Type | Item Description                           | Voltage | Lamp Watts | Wattage Equivalent | Lumens | LPW  | Base | CRI | Color Temperature | Glass Type | Case Quantity |
|-----------------------------------------------------------|-----------|--------------------------------------------|---------|------------|--------------------|--------|------|------|-----|-------------------|------------|---------------|
| <b>15,000 HOUR LED CLASSIC FILAMENT T-LAMPS, DIMMABLE</b> |           |                                            |         |            |                    |        |      |      |     |                   |            |               |
| <b>DIMMABLE LED 3W T6 FILAMENT, E12 BASE</b>              |           |                                            |         |            |                    |        |      |      |     |                   |            |               |
| FT0603D2522E12SB                                          | T6        | Dim LED 3w T6, 22K, Sandblast, E12 Base    | 120     | 3          | 25W                | 200    | 66.7 | E12  | >80 | 2200              | Sandblast  | 12            |
| FT0603D2524E12SB                                          | T6        | Dim LED 3w T6, 24K, Sandblast, E12 Base    | 120     | 3          | 25W                | 200    | 66.7 | E12  | >80 | 2400              | Sandblast  | 12            |
| FT0603D2527E12C                                           | T6        | Dim LED 3w T6, 27K, Clear, E12 Base        | 120     | 3          | 25W                | 250    | 83.3 | E12  | >80 | 2700              | Clear      | 12            |
| FT0603D2527E12W                                           | T6        | Dim LED 3w T6, 27K, Frost, E12 Base        | 120     | 3          | 25W                | 250    | 83.3 | E12  | >80 | 2700              | Frosted    | 12            |
| <b>DIMMABLE LED 3.5W T10 FILAMENT, E26 BASE</b>           |           |                                            |         |            |                    |        |      |      |     |                   |            |               |
| FT1005D2524SB                                             | T10       | Dim LED 3.5w T10, 24K, Sandblast, E26 Base | 120     | 3.5        | 25W                | 250    | 71.4 | E26  | >80 | 2400              | Sandblast  | 12            |
| FT1005D2527EC                                             | T10       | Dim LED 3.5w T10, 27K, Clear, E26 Base     | 120     | 3.5        | 25W                | 250    | 71.4 | E26  | >80 | 2700              | Clear      | 12            |
| FT1005D2527EW                                             | T10       | Dim LED 3.5w T10, 27K, Frost, E26 Base     | 120     | 3.5        | 25W                | 250    | 71.4 | E26  | >80 | 2700              | Frosted    | 12            |
| FT1005D2550EC                                             | T10       | Dim LED 3.5w T10, 50K, Clear, E26 Base     | 120     | 3.5        | 25W                | 250    | 71.4 | E26  | >80 | 5000              | Clear      | 12            |
| FT1005D2550EW                                             | T10       | Dim LED 3.5w T10, 50K, Frost, E26 Base     | 120     | 3.5        | 25W                | 250    | 71.4 | E26  | >80 | 5000              | Frosted    | 12            |
| FT1007D2522SB                                             | T10       | Dim LED 3.5w T10, 22K, Sandblast, E26 Base | 120     | 3          | 25W                | 250    | 83.3 | E26  | >80 | 2400              | Sandblast  | 12            |
| FT1007D2524SB                                             | T10       | Dim LED 3.5w T10, 24K, Sandblast, E26 Base | 120     | 3          | 25W                | 250    | 83.3 | E26  | >80 | 2400              | Sandblast  | 12            |
| FT1007D2527C                                              | T10       | Dim LED 3.5w T10, 24K, Clear, E26 Base     | 120     | 3          | 25W                | 250    | 83.3 | E26  | >80 | 2400              | Clear      | 12            |
| <b>DIMMABLE LED 5W T10 FILAMENT, E26 BASE</b>             |           |                                            |         |            |                    |        |      |      |     |                   |            |               |
| FT1005D4027EC                                             | T10       | Dim LED 5w T10, 27K, Clear, E26 Base       | 120     | 5          | 40W                | 450    | 90   | E26  | >80 | 2700              | Clear      | 12            |
| FT1005D4027EW                                             | T10       | Dim LED 5w T10, 27K, Frost, E26 Base       | 120     | 5          | 40W                | 450    | 90   | E26  | >80 | 2700              | Frosted    | 12            |
| FT1005D4030EW                                             | T10       | Dim LED 5w T10, 30K, Frost, E26 Base       | 120     | 5          | 40W                | 450    | 90   | E26  | >80 | 3000              | Frosted    | 12            |
| FT1005D4040EW                                             | T10       | Dim LED 5w T10, 40K, Frost, E26 Base       | 120     | 5          | 40W                | 450    | 90   | E26  | >80 | 4000              | Frosted    | 12            |
| FT1005D4050EC                                             | T10       | Dim LED 5w T10, 50K, Clear, E26 Base       | 120     | 5          | 40W                | 450    | 90   | E26  | >80 | 5000              | Clear      | 12            |
| FT1005D4050EW                                             | T10       | Dim LED 5w T10, 50K, Frost, E26 Base       | 120     | 5          | 40W                | 450    | 90   | E26  | >80 | 5000              | Frosted    | 12            |
| <b>DIMMABLE LED 3.5W T25 FILAMENT, E12 BASE</b>           |           |                                            |         |            |                    |        |      |      |     |                   |            |               |
| FT2503D2527E12C                                           | T6        | Dim LED 3.5w T25, 27K, Clear, E12 Base     | 120     | 3.5        | 25W                | 250    | 71.4 | E12  | >80 | 2700              | Clear      | 12            |
| <b>DIMMABLE LED 8W T30 FILAMENT, E26 BASE</b>             |           |                                            |         |            |                    |        |      |      |     |                   |            |               |
| FT3014D6022SB                                             | T30       | Dim LED 8w T30, 22K, Sandblast, E26 Base   | 120     | 8          | 60W                | 800    | 100  | E26  | >80 | 2200              | Sandblast  | 12            |
| FT3014D6024SB                                             | T30       | Dim LED 8w T30, 24K, Sandblast, E26 Base   | 120     | 8          | 60W                | 800    | 100  | E26  | >80 | 2400              | Sandblast  | 12            |
| FT3014D6027SB                                             | T30       | Dim LED 8w T30, 27K, Sandblast, E26 Base   | 120     | 8          | 60W                | 800    | 100  | E26  | >80 | 2700              | Sandblast  | 12            |
| FT3014D6027EC                                             | T30       | Dim LED 8w T30, 27K, Clear, E26 Base       | 120     | 8          | 60W                | 800    | 100  | E26  | >80 | 2700              | Clear      | 12            |





# LED LAMPS



TCP's LED lamps run the gamut for every conceivable application, including residential, retail, industrial and commercial. We also have a lamp for every purpose – from A-19's to shaped filaments to deco lamps to our Starlight series. We know light.

| Item Number                                                  | Item Description                   | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CBCP  | Beam Angle | CCT   | CRI | Case Quantity |
|--------------------------------------------------------------|------------------------------------|---------|------------|--------------------|--------|-----------------|-------|------------|-------|-----|---------------|
| <b>25,000 HOUR HIGH LUMEN DIMMABLE ELITE PARS</b>            |                                    |         |            |                    |        |                 |       |            |       |     |               |
| <b>18.5W DIMMABLE HIGH LUMEN ELITE PAR38 (REPLACES 250W)</b> |                                    |         |            |                    |        |                 |       |            |       |     |               |
| L30P38D2527KSP                                               | 30W DIM High Lumen P38 - 2700K 15° | 120     | 30         | 250W               | 2700   | 90              | 20745 | 15         | 2700K | 80  | 12            |
| L30P38D2527KNFL                                              | 30W DIM High Lumen P38 - 2700K 25° | 120     | 30         | 250W               | 2700   | 90              | 9955  | 25         | 2700K | 80  | 12            |
| L30P38D2527KFL                                               | 30W DIM High Lumen P38 - 2700K 40° | 120     | 30         | 250W               | 2700   | 90              | 6340  | 40         | 2700K | 80  | 12            |
| L30P38D2530KSP                                               | 30W DIM High Lumen P38 - 3000K 15° | 120     | 30         | 250W               | 3000   | 100             | 22233 | 15         | 3000K | 80  | 12            |
| L30P38D2530KNFL                                              | 30W DIM High Lumen P38 - 3000K 25° | 120     | 30         | 250W               | 3000   | 100             | 10794 | 25         | 3000K | 80  | 12            |
| L30P38D2530KFL                                               | 30W DIM High Lumen P38 - 3000K 40° | 120     | 30         | 250W               | 3000   | 100             | 6414  | 40         | 3000K | 80  | 12            |
| L30P38D2535KSP                                               | 30W DIM High Lumen P38 - 3500K 15° | 120     | 30         | 250W               | 3000   | 100             | 23322 | 15         | 3500K | 80  | 12            |
| L30P38D2535KNFL                                              | 30W DIM High Lumen P38 - 3500K 25° | 120     | 30         | 250W               | 3000   | 100             | 10990 | 25         | 3500K | 80  | 12            |
| L30P38D2535KFL                                               | 30W DIM High Lumen P38 - 3500K 40° | 120     | 30         | 250W               | 3000   | 100             | 6845  | 40         | 3500K | 80  | 12            |
| L30P38D2541KSP                                               | 30W DIM High Lumen P38 - 4100K 15° | 120     | 30         | 250W               | 3000   | 100             | 21740 | 15         | 4100K | 80  | 12            |
| L30P38D2541KNFL                                              | 30W DIM High Lumen P38 - 4100K 25° | 120     | 30         | 250W               | 3000   | 100             | 10665 | 25         | 4100K | 80  | 12            |
| L30P38D2541KFL                                               | 30W DIM High Lumen P38 - 4100K 40° | 120     | 30         | 250W               | 3000   | 100             | 6483  | 40         | 4100K | 80  | 12            |
| L30P38D2550KSP                                               | 30W DIM High Lumen P38 - 5000K 15° | 120     | 30         | 250W               | 3000   | 100             | 23126 | 15         | 5000K | 80  | 12            |
| L30P38D2550KNFL                                              | 30W DIM High Lumen P38 - 5000K 25° | 120     | 30         | 250W               | 3000   | 100             | 11284 | 25         | 5000K | 80  | 12            |
| L30P38D2550KFL                                               | 30W DIM High Lumen P38 - 5000K 40° | 120     | 30         | 250W               | 3000   | 100             | 6637  | 40         | 5000K | 80  | 12            |





| Item Number | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CBCP | Beam Angle | CCT | CRI | Case Quantity |
|-------------|------------------|---------|------------|--------------------|--------|-----------------|------|------------|-----|-----|---------------|
|-------------|------------------|---------|------------|--------------------|--------|-----------------|------|------------|-----|-----|---------------|

## 25,000 HOUR HIGH OUTPUT DIMMABLE ELITE PARS

### 18.5W DIMMABLE HIGH OUTPUT ELITE PAR38 (REPLACES 150W)



|                    |                                               |     |      |      |      |       |       |    |       |    |    |
|--------------------|-----------------------------------------------|-----|------|------|------|-------|-------|----|-------|----|----|
| LED17HOP38D27KFL   | 18.5W DIM High Output P38 - 2700K 40°         | 120 | 18.5 | 150W | 1800 | 97.3  | 4346  | 40 | 2700K | 80 | 12 |
| LED17HOP38D27KNFL  | 18.5W DIM High Output P38 - 2700K 25°         | 120 | 18.5 | 150W | 1800 | 97.3  | 9299  | 25 | 2700K | 80 | 12 |
| LED17HOP38D27KSP   | 18.5W DIM High Output P38 - 2700K 15°         | 120 | 18.5 | 150W | 1800 | 97.3  | 21535 | 15 | 2700K | 80 | 12 |
| LED17HOP38D27KSPB  | 18.5W DIM High Output P38 - 2700K 15° - Black | 120 | 18.5 | 150W | 1800 | 97.3  | 21535 | 15 | 2700K | 80 | 12 |
| LED17HOP38D30KFL   | 18.5W DIM High Output P38 - 3000K 40°         | 120 | 18.5 | 150W | 1825 | 98.6  | 4365  | 40 | 3000K | 80 | 12 |
| LED17HOP38D30KFLB  | 18.5W DIM High Output P38 - 3000K 25° - Black | 120 | 18.5 | 150W | 1825 | 98.6  | 4365  | 40 | 3000K | 80 | 12 |
| LED17HOP38D30KNFL  | 18.5W DIM High Output P38 - 3000K 15°         | 120 | 18.5 | 150W | 1825 | 98.6  | 12782 | 25 | 3000K | 80 | 12 |
| LED17HOP38D30KNFLB | 18.5W DIM High Output P38 - 3000K 40° - Black | 120 | 18.5 | 150W | 1825 | 98.6  | 12782 | 25 | 3000K | 80 | 12 |
| LED17HOP38D30KSP   | 18.5W DIM High Output P38 - 3000K 25°         | 120 | 18.5 | 150W | 1825 | 98.6  | 23699 | 15 | 3000K | 80 | 12 |
| LED17HOP38D30KSPB  | 18.5W DIM High Output P38 - 3000K 15° - Black | 120 | 18.5 | 150W | 1825 | 98.6  | 23699 | 15 | 3000K | 80 | 12 |
| LED17HOP38D35KFL   | 18.5W DIM High Output P38 - 3500K 25°         | 120 | 18.5 | 150W | 1850 | 100.0 | 4365  | 40 | 3500K | 80 | 12 |
| LED17HOP38D35KFLB  | 18.5W DIM High Output P38 - 3500K 15° - Black | 120 | 18.5 | 150W | 1850 | 100.0 | 4365  | 40 | 3500K | 80 | 12 |
| LED17HOP38D35KWFL  | 18.5W DIM High Output P38 - 3500K 60°         | 120 | 18.5 | 150W | 1850 | 100.0 | —     | 60 | 3500K | 80 | 12 |
| LED17HOP38D35KSP   | 18.5W DIM High Output P38 - 3500K 25°         | 120 | 18.5 | 150W | 1850 | 100.0 | 23685 | 25 | 3500K | 80 | 12 |
| LED17HOP38D35KNFL  | 18.5W DIM High Output P38 - 3500K 15°         | 120 | 18.5 | 150W | 1850 | 100.0 | 12782 | 15 | 3500K | 80 | 12 |
| LED17HOP38D41KFL   | 18.5W DIM High Output P38 - 4100K 40°         | 120 | 18.5 | 150W | 1900 | 102.7 | 4604  | 40 | 4100K | 80 | 12 |
| LED17HOP38D41KNFL  | 18.5W DIM High Output P38 - 4100K 25°         | 120 | 18.5 | 150W | 1900 | 102.7 | 11614 | 25 | 4100K | 80 | 12 |
| LED17HOP38D41KSP   | 18.5W DIM High Output P38 - 4100K 15°         | 120 | 18.5 | 150W | 1900 | 102.7 | 22458 | 15 | 4100K | 80 | 12 |
| LED17HOP38D50KFL   | 18.5W DIM High Output P38 - 5000K 40°         | 120 | 18.5 | 150W | 2000 | 108.1 | 4446  | 40 | 5000K | 80 | 12 |
| LED17HOP38D50KNFL  | 18.5W DIM High Output P38 - 5000K 25°         | 120 | 18.5 | 150W | 2000 | 108.1 | 12467 | 25 | 3000K | 80 | 12 |
| LED17HOP38D50KSP   | 18.5W DIM High Output P38 - 5000K 15°         | 120 | 18.5 | 150W | 2000 | 108.1 | 21535 | 15 | 3000K | 80 | 12 |

| Item Number                                     | Item Description              | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CBCP  | Beam Angle | CCT   | CRI | Case Quantity |
|-------------------------------------------------|-------------------------------|---------|------------|--------------------|--------|-----------------|-------|------------|-------|-----|---------------|
| <b>25,000 HOUR DIMMABLE ELITE PARS</b>          |                               |         |            |                    |        |                 |       |            |       |     |               |
| <b>15W DIMMABLE ELITE PAR38 (REPLACES 120W)</b> |                               |         |            |                    |        |                 |       |            |       |     |               |
| LED17P38D24KFL                                  | 15W PAR38 - 2400K 40°         | 120     | 15         | 120W               | 1050   | 70              | 2132  | 40         | 2400K | 80  | 12            |
| LED17P38D24KNFL                                 | 15W PAR38 - 2400K 25°         | 120     | 15         | 120W               | 1050   | 70              | 4750  | 25         | 2400K | 80  | 12            |
| LED17P38D24KSP                                  | 15W PAR38 - 2400K 15°         | 120     | 15         | 120W               | 1050   | 70              | 6937  | 15         | 2400K | 80  | 12            |
| LED17P38D27KFL                                  | 15W PAR38 - 2700K 40°         | 120     | 15         | 120W               | 1200   | 80              | 2563  | 40         | 2700K | 80  | 12            |
| LED17P38D27KFLB                                 | 15W PAR38 - 2700K 40° - Black | 120     | 15         | 120W               | 1200   | 80              | 2563  | 40         | 2700K | 80  | 12            |
| LED17P38D27KNFL                                 | 15W PAR38 - 2700K 25°         | 120     | 15         | 120W               | 1200   | 80              | 5710  | 25         | 2700K | 80  | 12            |
| LED17P38D27KSP                                  | 15W PAR38 - 2700K 15°         | 120     | 15         | 120W               | 1200   | 80              | 8338  | 15         | 2700K | 80  | 12            |
| LED17P38D30KFL                                  | 15W PAR38 - 3000K 40°         | 120     | 15         | 120W               | 1200   | 80              | 3107  | 40         | 3000K | 80  | 12            |
| LED17P38D30KFLB                                 | 15W PAR38 - 3000K 40° - Black | 120     | 15         | 120W               | 1200   | 80              | 3107  | 40         | 3000K | 80  | 12            |
| LED17P38D30KNFL                                 | 15W PAR38 - 3000K 25°         | 120     | 15         | 120W               | 1200   | 80              | 6130  | 25         | 3000K | 80  | 12            |
| LED17P38D30KNFLB                                | 15W PAR38 - 3000K 25° - Black | 120     | 15         | 120W               | 1200   | 80              | 6130  | 25         | 3000K | 80  | 12            |
| LED17P38D30KSP                                  | 15W PAR38 - 3000K 15°         | 120     | 15         | 120W               | 1200   | 80              | 8658  | 15         | 3000K | 80  | 12            |
| LED17P38D30KSPB                                 | 15W PAR38 - 3000K 15° - Black | 120     | 15         | 120W               | 1200   | 80              | 8658  | 15         | 3000K | 80  | 12            |
| LED17P38D30KWFLB                                | 15W PAR38 - 3000K 60° - Black | 120     | 15         | 120W               | 1200   | 80              | —     | 60         | 3000K | 80  | 12            |
| LED17P38D35KFL                                  | 15W PAR38 - 3500K 40°         | 120     | 15         | 120W               | 1200   | 80              | 3607  | 40         | 3500K | 80  | 12            |
| LED17P38D35KFLB                                 | 15W PAR38 - 3500K 40° - Black | 120     | 15         | 120W               | 1200   | 80              | 3607  | 40         | 3500K | 80  | 12            |
| LED17P38D35KNFL                                 | 15W PAR38 - 3500K 25°         | 120     | 15         | 120W               | 1200   | 80              | 6130  | 25         | 3500K | 80  | 12            |
| LED17P38D35KNFLB                                | 15W PAR38 - 3500K 25° - Black | 120     | 15         | 120W               | 1200   | 80              | 6130  | 25         | 3500K | 80  | 12            |
| LED17P38D35KSP                                  | 15W PAR38 - 3500K 15°         | 120     | 15         | 120W               | 1200   | 80              | 8658  | 15         | 3500K | 80  | 12            |
| LED17P38D41KFL                                  | 15W PAR38 - 4100K 40°         | 120     | 15         | 120W               | 1200   | 80              | 2870  | 40         | 4100K | 80  | 12            |
| LED17P38D41KFLB                                 | 15W PAR38 - 4100K 40° - Black | 120     | 15         | 120W               | 1200   | 80              | 2870  | 40         | 4100K | 80  | 12            |
| LED17P38D41KNFL                                 | 15W PAR38 - 4100K 25°         | 120     | 15         | 120W               | 1200   | 80              | 9288  | 25         | 4100K | 80  | 12            |
| LED17P38D41KNFLB                                | 15W PAR38 - 4100K 25° - Black | 120     | 15         | 120W               | 1200   | 80              | 9288  | 25         | 4100K | 80  | 12            |
| LED17P38D41KSP                                  | 15W PAR38 - 4100K 15°         | 120     | 15         | 120W               | 1200   | 80              | 18408 | 15         | 4100K | 80  | 12            |
| LED17P38D41KSPB                                 | 15W PAR38 - 4100K 15° - Black | 120     | 15         | 120W               | 1200   | 80              | 18408 | 15         | 4100K | 80  | 12            |
| LED17P38D50KFL                                  | 15W PAR38 - 5000K 40°         | 120     | 15         | 120W               | 1200   | 80              | 2713  | 40         | 5000K | 80  | 12            |
| LED17P38D50KFLB                                 | 15W PAR38 - 5000K 40° - Black | 120     | 15         | 120W               | 1200   | 80              | 2713  | 40         | 5000K | 80  | 12            |
| LED17P38D50KNFL                                 | 15W PAR38 - 5000K 25°         | 120     | 15         | 120W               | 1200   | 80              | 9387  | 25         | 5000K | 80  | 12            |
| LED17P38D50KSP                                  | 15W PAR38 - 5000K 15°         | 120     | 15         | 120W               | 1200   | 80              | 19721 | 15         | 5000K | 80  | 12            |





| Item Number | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CBCP | Beam Angle | CCT | CRI | Case Quantity |
|-------------|------------------|---------|------------|--------------------|--------|-----------------|------|------------|-----|-----|---------------|
|-------------|------------------|---------|------------|--------------------|--------|-----------------|------|------------|-----|-----|---------------|

### 13.5W DIMMABLE ELITE PAR38 (REPLACES 90W)



|                  |                                 |     |      |     |      |      |       |    |       |    |    |
|------------------|---------------------------------|-----|------|-----|------|------|-------|----|-------|----|----|
| LED14P38D24KFL   | 13.5W PAR38 - 2400K 40°         | 120 | 13.5 | 90W | 1000 | 75.0 | –     | 40 | 2400K | 80 | 12 |
| LED14P38D24KNFL  | 13.5W PAR38 - 2400K 25°         | 120 | 13.5 | 90W | 1000 | 75.0 | –     | 25 | 2400K | 80 | 12 |
| LED14P38D24KSP   | 13.5W PAR38 - 2400K 15°         | 120 | 13.5 | 90W | 1000 | 75.0 | –     | 15 | 2400K | 80 | 12 |
| LED14P38D27KFL   | 13.5W PAR38 - 2700K 40°         | 120 | 13.5 | 90W | 1050 | 77.8 | 2858  | 40 | 2700K | 80 | 12 |
| LED14P38D27KNFL  | 13.5W PAR38 - 2700K 25°         | 120 | 13.5 | 90W | 1050 | 77.8 | 5583  | 25 | 2700K | 80 | 12 |
| LED14P38D27KNFLB | 13.5W PAR38 - 2700K 25° - Black | 120 | 13.5 | 90W | 1050 | 77.8 | 5583  | 25 | 2700K | 80 | 12 |
| LED14P38D27KSP   | 13.5W PAR38 - 2700K 15°         | 120 | 13.5 | 90W | 1050 | 77.8 | 10949 | 15 | 2700K | 80 | 12 |
| LED14P38D27KSPB  | 13.5W PAR38 - 2700K 15° - Black | 120 | 13.5 | 90W | 1050 | 77.8 | 10949 | 15 | 2700K | 80 | 12 |
| LED14P38D30KFL   | 13.5W PAR38 - 3000K 40°         | 120 | 13.5 | 90W | 1050 | 77.8 | 2846  | 40 | 3000K | 80 | 12 |
| LED14P38D30KNFL  | 13.5W PAR38 - 3000K 25°         | 120 | 13.5 | 90W | 1050 | 77.8 | 6721  | 25 | 3000K | 80 | 12 |
| LED14P38D30KSP   | 13.5W PAR38 - 3000K 15°         | 120 | 13.5 | 90W | 1050 | 77.8 | 11845 | 15 | 3000K | 80 | 12 |
| LED14P38D30KWFL  | 13.5W PAR38 - 3000K 60°         | 120 | 13.5 | 90W | 1050 | 77.8 | –     | 60 | 3000K | 80 | 12 |
| LED14P38D35KFL   | 13.5W PAR38 - 3500K 40°         | 120 | 13.5 | 90W | 1050 | 77.8 | 2846  | 40 | 3500K | 80 | 12 |
| LED14P38D35KFLB  | 13.5W PAR38 - 3500K 40° - Black | 120 | 13.5 | 90W | 1050 | 77.8 | 2846  | 40 | 3500K | 80 | 12 |
| LED14P38D35KNFL  | 13.5W PAR38 - 3500K 25°         | 120 | 13.5 | 90W | 1050 | 77.8 | 6271  | 25 | 3500K | 80 | 12 |
| LED14P38D35KSP   | 13.5W PAR38 - 3500K 15°         | 120 | 13.5 | 90W | 1050 | 77.8 | 10949 | 15 | 3500K | 80 | 12 |
| LED14P38D41KFL   | 13.5W PAR38 - 4100K 40°         | 120 | 13.5 | 90W | 1050 | 77.8 | 2678  | 40 | 4100K | 80 | 12 |
| LED14P38D41KFLB  | 13.5W PAR38 - 4100K 40° - Black | 120 | 13.5 | 90W | 1050 | 77.8 | 2678  | 40 | 4100K | 80 | 12 |
| LED14P38D41KNFL  | 13.5W PAR38 - 4100K 25°         | 120 | 13.5 | 90W | 1050 | 77.8 | 8310  | 25 | 4100K | 80 | 12 |
| LED14P38D41KSP   | 13.5W PAR38 - 4100K 15°         | 120 | 13.5 | 90W | 1050 | 77.8 | 13535 | 15 | 4100K | 80 | 12 |
| LED14P38D41KSPB  | 13.5W PAR38 - 4100K 15° - Black | 120 | 13.5 | 90W | 1050 | 77.8 | 13535 | 15 | 4100K | 80 | 12 |
| LED14P38D50KFL   | 13.5W PAR38 - 5000K 40°         | 120 | 13.5 | 90W | 1050 | 77.8 | 2647  | 40 | 5000K | 80 | 12 |
| LED14P38D50KFLB  | 13.5W PAR38 - 5000K 40° - Black | 120 | 13.5 | 90W | 1050 | 77.8 | 2647  | 40 | 5000K | 80 | 12 |
| LED14P38D50KNFL  | 13.5W PAR38 - 5000K 25°         | 120 | 13.5 | 90W | 1150 | 82.1 | 7611  | 25 | 5000K | 80 | 12 |
| LED14P38D50KSP   | 13.5W PAR38 - 5000K 15°         | 120 | 13.5 | 90W | 1150 | 82.1 | 12147 | 15 | 5000K | 80 | 12 |

| Item Number                                      | Item Description                | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CBCP  | Beam Angle | CCT   | CRI | Case Quantity |
|--------------------------------------------------|---------------------------------|---------|------------|--------------------|--------|-----------------|-------|------------|-------|-----|---------------|
| <b>13.5W DIMMABLE ELITE PAR30 (REPLACES 75W)</b> |                                 |         |            |                    |        |                 |       |            |       |     |               |
| LED14P30D24KFL                                   | 13.5W PAR30 - 2400K 40°         | 120     | 13.5       | 75W                | 1000   | 74.1            | –     | 40         | 2400K | 80  | 12            |
| LED14P30D24KNFL                                  | 13.5W PAR30 - 2400K 25°         | 120     | 13.5       | 75W                | 1000   | 74.1            | –     | 25         | 2400K | 80  | 12            |
| LED14P30D24KNFLB                                 | 13.5W PAR30 - 2400K 25° - Black | 120     | 13.5       | 75W                | 1000   | 74.1            | –     | 25         | 2400K | 80  | 12            |
| LED14P30D24KSP                                   | 13.5W PAR30 - 2400K 15°         | 120     | 13.5       | 75W                | 1000   | 74.1            | –     | 15         | 2400K | 80  | 12            |
| LED14P30D27KFL                                   | 13.5W PAR30 - 2700K 40°         | 120     | 13.5       | 75W                | 1050   | 77.8            | 2693  | 40         | 2700K | 80  | 12            |
| LED14P30D27KFLB                                  | 13.5W PAR30 - 2700K 40° - Black | 120     | 13.5       | 75W                | 1050   | 77.8            | 2693  | 40         | 2700K | 80  | 12            |
| LED14P30D27KNFL                                  | 13.5W PAR30 - 2700K 25°         | 120     | 13.5       | 75W                | 1050   | 77.8            | 5808  | 25         | 2700K | 80  | 12            |
| LED14P30D27KNFLB                                 | 13.5W PAR30 - 2700K 25° - Black | 120     | 13.5       | 75W                | 1050   | 77.8            | 5808  | 25         | 2700K | 80  | 12            |
| LED14P30D27KSP                                   | 13.5W PAR30 - 2700K 15°         | 120     | 13.5       | 75W                | 1050   | 77.8            | 10563 | 15         | 2700K | 80  | 12            |
| LED14P30D27KSPB                                  | 13.5W PAR30 - 2700K 15° - Black | 120     | 13.5       | 75W                | 1050   | 77.8            | 10563 | 15         | 2700K | 80  | 12            |
| LED14P30D30KFL                                   | 13.5W PAR30 - 3000K 40°         | 120     | 13.5       | 75W                | 1050   | 77.8            | 2849  | 40         | 3000K | 80  | 12            |
| LED14P30D30KFLB                                  | 13.5W PAR30 - 3000K 40° - Black | 120     | 13.5       | 75W                | 1050   | 77.8            | 2849  | 40         | 3000K | 80  | 12            |
| LED14P30D30KNFL                                  | 13.5W PAR30 - 3000K 25°         | 120     | 13.5       | 75W                | 1050   | 77.8            | 6392  | 25         | 3000K | 80  | 12            |
| LED14P30D30KNFLB                                 | 13.5W PAR30 - 3000K 25° - Black | 120     | 13.5       | 75W                | 1050   | 77.8            | 6392  | 25         | 3000K | 80  | 12            |
| LED14P30D30KSP                                   | 13.5W PAR30 - 3000K 15°         | 120     | 13.5       | 75W                | 1050   | 77.8            | 11181 | 15         | 3000K | 80  | 12            |
| LED14P30D30KSPB                                  | 13.5W PAR30 - 3000K 15° - Black | 120     | 13.5       | 75W                | 1050   | 77.8            | 11181 | 15         | 3000K | 80  | 12            |
| LED14P30D35KFL                                   | 13.5W PAR30 - 3500K 40°         | 120     | 13.5       | 75W                | 1050   | 77.8            | 2849  | 40         | 3500K | 80  | 12            |
| LED14P30D35KFLB                                  | 13.5W PAR30 - 3500K 40° - Black | 120     | 13.5       | 75W                | 1050   | 77.8            | 2849  | 40         | 3500K | 80  | 12            |
| LED14P30D35KNFL                                  | 13.5W PAR30 - 3500K 25°         | 120     | 13.5       | 75W                | 1050   | 77.8            | 6392  | 25         | 3500K | 80  | 12            |
| LED14P30D35KSP                                   | 13.5W PAR30 - 3500K 15°         | 120     | 13.5       | 75W                | 1050   | 77.8            | 11181 | 15         | 3500K | 80  | 12            |
| LED14P30D41KFL                                   | 13.5W PAR30 - 4100K 40°         | 120     | 13.5       | 75W                | 1050   | 77.8            | 2661  | 40         | 4100K | 80  | 12            |
| LED14P30D41KFLB                                  | 13.5W PAR30 - 4100K 40° - Black | 120     | 13.5       | 75W                | 1050   | 77.8            | 2661  | 40         | 4100K | 80  | 12            |
| LED14P30D41KNFL                                  | 13.5W PAR30 - 4100K 25°         | 120     | 13.5       | 75W                | 1050   | 77.8            | 5781  | 25         | 4100K | 80  | 12            |
| LED14P30D41KNFLB                                 | 13.5W PAR30 - 4100K 25° - Black | 120     | 13.5       | 75W                | 1050   | 77.8            | 5781  | 25         | 4100K | 80  | 12            |
| LED14P30D41KSP                                   | 13.5W PAR30 - 4100K 15°         | 120     | 13.5       | 75W                | 1050   | 77.8            | 12465 | 15         | 4100K | 80  | 12            |
| LED14P30D41KSPB                                  | 13.5W PAR30 - 4100K 15° - Black | 120     | 13.5       | 75W                | 1050   | 77.8            | 12465 | 15         | 4100K | 80  | 12            |
| LED14P30D50KFL                                   | 13.5W PAR30 - 5000K 40°         | 120     | 13.5       | 75W                | 1050   | 77.8            | 2837  | 40         | 5000K | 80  | 12            |
| LED14P30D50KFLB                                  | 13.5W PAR30 - 5000K 40° - Black | 120     | 13.5       | 75W                | 1050   | 77.8            | 2837  | 40         | 5000K | 80  | 12            |
| LED14P30D50KNFL                                  | 13.5W PAR30 - 5000K 25°         | 120     | 13.5       | 75W                | 1050   | 77.8            | 5875  | 25         | 5000K | 80  | 12            |
| LED14P30D50KSP                                   | 13.5W PAR30 - 5000K 15°         | 120     | 13.5       | 75W                | 1050   | 77.8            | 10043 | 15         | 5000K | 80  | 12            |





| Item Number                                      | Item Description                | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CBCP | Beam Angle | CCT   | CRI | Case Quantity |
|--------------------------------------------------|---------------------------------|---------|------------|--------------------|--------|-----------------|------|------------|-------|-----|---------------|
| <b>10.5W DIMMABLE ELITE PAR30 (REPLACES 75W)</b> |                                 |         |            |                    |        |                 |      |            |       |     |               |
| LED12P30D24KFL                                   | 10.5W PAR30 - 2400K 40°         | 120     | 10.5       | 75W                | 800    | 76.2            | –    | 40         | 2400K | 80  | 12            |
| LED12P30D24KNFL                                  | 10.5W PAR30 - 2400K 25°         | 120     | 10.5       | 75W                | 800    | 76.2            | –    | 25         | 2400K | 80  | 12            |
| LED12P30D24KSP                                   | 10.5W PAR30 - 2400K 15°         | 120     | 10.5       | 75W                | 800    | 76.2            | –    | 15         | 2400K | 80  | 12            |
| LED12P30D27KFL                                   | 10.5W PAR30 - 2700K 40°         | 120     | 10.5       | 75W                | 850    | 81              | 2202 | 40         | 2700K | 80  | 12            |
| LED12P30D27KFLB                                  | 10.5W PAR30 - 2700K 40° - Black | 120     | 10.5       | 75W                | 850    | 81              | 2202 | 40         | 2700K | 80  | 12            |
| LED12P30D27KNFL                                  | 10.5W PAR30 - 2700K 25°         | 120     | 10.5       | 75W                | 850    | 81              | 5031 | 25         | 2700K | 80  | 12            |
| LED12P30D27KNFLB                                 | 10.5W PAR30 - 2700K 25° - Black | 120     | 10.5       | 75W                | 850    | 81              | 5031 | 25         | 2700K | 80  | 12            |
| LED12P30D27KSP                                   | 10.5W PAR30 - 2700K 15°         | 120     | 10.5       | 75W                | 850    | 81              | 9193 | 15         | 2700K | 80  | 12            |
| LED12P30D27KSPB                                  | 10.5W PAR30 - 2700K 15° - Black | 120     | 10.5       | 75W                | 850    | 81              | 9193 | 15         | 2700K | 80  | 12            |
| LED12P30D30KFL                                   | 12W PAR30 - 3000K 40°           | 120     | 10.5       | 75W                | 850    | 81              | 2389 | 40         | 3000K | 80  | 12            |
| LED12P30D30KFLB                                  | 12W PAR30 - 3000K 40° - Black   | 120     | 10.5       | 75W                | 850    | 81              | 2389 | 40         | 3000K | 80  | 12            |
| LED12P30D30KNFL                                  | 12W PAR30 - 3000K 25°           | 120     | 10.5       | 75W                | 850    | 81              | 5528 | 25         | 3000K | 80  | 12            |
| LED12P30D30KNFLB                                 | 12W PAR30 - 3000K 25° - Black   | 120     | 10.5       | 75W                | 850    | 81              | 5528 | 25         | 3000K | 80  | 12            |
| LED12P30D30KSP                                   | 12W PAR30 - 3000K 15°           | 120     | 10.5       | 75W                | 850    | 81              | 9006 | 15         | 3000K | 80  | 12            |
| LED12P30D30KSPB                                  | 12W PAR30 - 3000K 15° - Black   | 120     | 10.5       | 75W                | 850    | 81              | 9006 | 15         | 3000K | 80  | 12            |
| LED12P30D35KFL                                   | 12W PAR30 - 3500K 40°           | 120     | 10.5       | 75W                | 850    | 81              | 2389 | 40         | 3500K | 80  | 12            |
| LED12P30D35KNFL                                  | 12W PAR30 - 3500K 25°           | 120     | 10.5       | 75W                | 850    | 81              | 5528 | 25         | 3500K | 80  | 12            |
| LED12P30D35KSP                                   | 12W PAR30 - 3500K 15°           | 120     | 10.5       | 75W                | 850    | 81              | 9006 | 15         | 3500K | 80  | 12            |
| LED12P30D41KFL                                   | 12W PAR30 - 4100K 40°           | 120     | 10.5       | 75W                | 850    | 81              | 2561 | 40         | 4100K | 80  | 12            |
| LED12P30D41KFLB                                  | 12W PAR30 - 4100K 40° - Black   | 120     | 10.5       | 75W                | 850    | 81              | 2561 | 40         | 4100K | 80  | 12            |
| LED12P30D41KNFL                                  | 12W PAR30 - 4100K 25°           | 120     | 10.5       | 75W                | 850    | 81              | 5781 | 25         | 4100K | 80  | 12            |
| LED12P30D41KNFLB                                 | 12W PAR30 - 4100K 25° - Black   | 120     | 10.5       | 75W                | 850    | 81              | 5781 | 25         | 4100K | 80  | 12            |
| LED12P30D41KSP                                   | 12W PAR30 - 4100K 15°           | 120     | 10.5       | 75W                | 850    | 81              | 9491 | 15         | 4100K | 80  | 12            |
| LED12P30D41KSPB                                  | 12W PAR30 - 4100K 15° - Black   | 120     | 10.5       | 75W                | 850    | 81              | 9491 | 15         | 4100K | 80  | 12            |
| LED12P30D50KFL                                   | 12W PAR30 - 5000K 40°           | 120     | 10.5       | 75W                | 850    | 81              | 2437 | 40         | 5000K | 80  | 12            |
| LED12P30D50KFLB                                  | 12W PAR30 - 5000K 40° - Black   | 120     | 10.5       | 75W                | 850    | 81              | 2437 | 40         | 5000K | 80  | 12            |
| LED12P30D50KNFL                                  | 12W PAR30 - 5000K 25°           | 120     | 10.5       | 75W                | 850    | 81              | 5575 | 25         | 5000K | 80  | 12            |
| LED12P30D50KSP                                   | 12W PAR30 - 5000K 15°           | 120     | 10.5       | 75W                | 850    | 81              | 9647 | 15         | 5000K | 80  | 12            |



Many items are ENERGY STAR® qualified.  
Visit [energystar.gov](http://energystar.gov) for a full listing



**5 YEAR**  
WARRANTY

Black Housing option available. Add "B" to the end of item #.

Consult [www.tapi.com](http://www.tapi.com) for warranty information.

| Item Number                                                         | Item Description                         | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CBCP | Beam Angle | CCT   | CRI | Case Quantity |
|---------------------------------------------------------------------|------------------------------------------|---------|------------|--------------------|--------|-----------------|------|------------|-------|-----|---------------|
| <b>10W DIMMABLE ELITE PAR30 SHORT NECK (REPLACES 75W) CONTINUED</b> |                                          |         |            |                    |        |                 |      |            |       |     |               |
| LED12P30SD24KFL                                                     | 10W PAR30 Short Neck - 2400K 40°         | 120     | 10         | 75W                | 800    | 80              | 1619 | 40         | 2400K | 80  | 12            |
| LED12P30SD24KNFL                                                    | 10W PAR30 Short Neck - 2400K 25°         | 120     | 10         | 75W                | 800    | 80              | —    | 25         | 2400K | 80  | 12            |
| LED12P30SD24KSP                                                     | 10W PAR30 Short Neck - 2400K 15°         | 120     | 10         | 75W                | 800    | 80              | —    | 15         | 2400K | 80  | 12            |
| LED12P30SD27KFL                                                     | 10W PAR30 Short Neck - 2700K 40°         | 120     | 10         | 75W                | 850    | 85              | 1817 | 40         | 2700K | 80  | 12            |
| LED12P30SD27KFLB                                                    | 10W PAR30 Short Neck - 2700K 40° - Black | 120     | 10         | 75W                | 850    | 85              | 1817 | 40         | 2700K | 80  | 12            |
| LED12P30SD27KNFL                                                    | 10W PAR30 Short Neck - 2700K 40°         | 120     | 10         | 75W                | 850    | 85              | 4025 | 25         | 2700K | 80  | 12            |
| LED12P30SD27KNFLB                                                   | 10W PAR30 Short Neck - 2700K 40° - Black | 120     | 10         | 75W                | 850    | 85              | 4025 | 25         | 2700K | 80  | 12            |
| LED12P30SD27KSP                                                     | 10W PAR30 Short Neck - 2700K 15°         | 120     | 10         | 75W                | 850    | 85              | 8042 | 15         | 2700K | 80  | 12            |
| LED12P30SD30KFL                                                     | 10W PAR30 Short Neck - 3000K 40°         | 120     | 10         | 75W                | 850    | 85              | 1858 | 40         | 3000K | 80  | 12            |
| LED12P30SD30KFLB                                                    | 10W PAR30 Short Neck - 3000K 40° - Black | 120     | 10         | 75W                | 850    | 85              | 1858 | 40         | 3000K | 80  | 12            |
| LED12P30SD30KNFL                                                    | 10W PAR30 Short Neck - 3000K 25°         | 120     | 10         | 75W                | 850    | 85              | 4968 | 25         | 3000K | 80  | 12            |
| LED12P30SD30KNFLB                                                   | 10W PAR30 Short Neck - 3000K 25° - Black | 120     | 10         | 75W                | 850    | 85              | 4968 | 25         | 3000K | 80  | 12            |
| LED12P30SD30KSP                                                     | 10W PAR30 Short Neck - 3000K 15°         | 120     | 10         | 75W                | 850    | 85              | 8380 | 15         | 3000K | 80  | 12            |
| LED12P30SD30KSPB                                                    | 10W PAR30 Short Neck - 3000K 15° - Black | 120     | 10         | 75W                | 850    | 85              | 8380 | 15         | 3000K | 80  | 12            |
| LED12P30SD35KFL                                                     | 10W PAR30 Short Neck - 3500K 40°         | 120     | 10         | 75W                | 850    | 85              | 2232 | 40         | 3500K | 80  | 12            |
| LED12P30SD35KFLB                                                    | 10W PAR30 Short Neck - 3500K 40° - Black | 120     | 10         | 75W                | 850    | 85              | 2232 | 40         | 3500K | 80  | 12            |
| LED12P30SD35KNFL                                                    | 10W PAR30 Short Neck - 3500K 25°         | 120     | 10         | 75W                | 850    | 85              | 4402 | 25         | 3500K | 80  | 12            |
| LED12P30SD35KNFLB                                                   | 10W PAR30 Short Neck - 3500K 25° - Black | 120     | 10         | 75W                | 850    | 85              | 4402 | 25         | 3500K | 80  | 12            |
| LED12P30SD35KSP                                                     | 10W PAR30 Short Neck - 3500K 15°         | 120     | 10         | 75W                | 850    | 85              | 8380 | 15         | 3500K | 80  | 12            |
| LED12P30SD41KFL                                                     | 10W PAR30 Short Neck - 4100K 40°         | 120     | 10         | 75W                | 850    | 85              | 2247 | 40         | 4100K | 80  | 12            |
| LED12P30SD41KFLB                                                    | 10W PAR30 Short Neck - 4100K 40° - Black | 120     | 10         | 75W                | 850    | 85              | 2247 | 40         | 4100K | 80  | 12            |
| LED12P30SD41KNFL                                                    | 10W PAR30 Short Neck - 4100K 25°         | 120     | 10         | 75W                | 850    | 85              | 4895 | 25         | 4100K | 80  | 12            |
| LED12P30SD41KSP                                                     | 10W PAR30 Short Neck - 4100K 15°         | 120     | 10         | 75W                | 850    | 85              | 8710 | 15         | 4100K | 80  | 12            |
| LED12P30SD50KFL                                                     | 10W PAR30 Short Neck - 5000K 40°         | 120     | 10         | 75W                | 850    | 85              | 2454 | 40         | 5000K | 80  | 12            |
| LED12P30SD50KNFL                                                    | 10W PAR30 Short Neck - 5000K 25°         | 120     | 10         | 75W                | 850    | 85              | 5260 | 25         | 5000K | 80  | 12            |





| Item Number | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CBCP | Beam Angle | CCT | CRI | Case Quantity |
|-------------|------------------|---------|------------|--------------------|--------|-----------------|------|------------|-----|-----|---------------|
|-------------|------------------|---------|------------|--------------------|--------|-----------------|------|------------|-----|-----|---------------|

## 7W DIMMABLE ELITE PAR20 (REPLACES 50W)



|                 |                              |     |   |     |     |      |      |    |       |    |    |
|-----------------|------------------------------|-----|---|-----|-----|------|------|----|-------|----|----|
| LED8P20D24KFL   | 7W PAR20 - 2400K 40°         | 120 | 7 | 50W | 550 | 78.6 | 1058 | 40 | 2400K | 80 | 12 |
| LED8P20D24KNFL  | 7W PAR20 - 2400K 25°         | 120 | 7 | 50W | 550 | 78.6 | 1894 | 25 | 2400K | 80 | 12 |
| LED8P20D27KFL   | 7W PAR20 - 2700K 40°         | 120 | 7 | 50W | 600 | 85.7 | 1208 | 40 | 2700K | 80 | 12 |
| LED8P20D27KFLB  | 7W PAR20 - 2700K 40° - Black | 120 | 7 | 50W | 600 | 85.7 | 1208 | 40 | 2700K | 80 | 12 |
| LED8P20D27KNFL  | 7W PAR20 - 2700K 25°         | 120 | 7 | 50W | 600 | 85.7 | 2030 | 25 | 2700K | 80 | 12 |
| LED8P20D27KSP   | 7W PAR20 - 2700K 15°         | 120 | 7 | 50W | 600 | 85.7 | 4898 | 15 | 2700K | 80 | 12 |
| LED8P20D30KFL   | 7W PAR20 - 3000K 40°         | 120 | 7 | 50W | 625 | 89.3 | 1187 | 40 | 3000K | 80 | 12 |
| LED8P20D30KFLB  | 7W PAR20 - 3000K 40° - Black | 120 | 7 | 50W | 625 | 89.3 | 1187 | 40 | 3000K | 80 | 12 |
| LED8P20D30KNFL  | 7W PAR20 - 3000K 25°         | 120 | 7 | 50W | 625 | 89.3 | 2050 | 25 | 3000K | 80 | 12 |
| LED8P20D30KNFLB | 7W PAR20 - 3000K 25° - Black | 120 | 7 | 50W | 625 | 89.3 | 2050 | 25 | 3000K | 80 | 12 |
| LED8P20D30KSP   | 7W PAR20 - 3000K 15°         | 120 | 7 | 50W | 625 | 89.3 | 5391 | 15 | 3000K | 80 | 12 |
| LED8P20D35KFL   | 7W PAR20 - 3500K 40°         | 120 | 7 | 50W | 675 | 96.4 | 1187 | 25 | 3500K | 80 | 12 |
| LED8P20D35KNFL  | 7W PAR20 - 3500K 25°         | 120 | 7 | 50W | 675 | 96.4 | 2050 | 25 | 3500K | 80 | 12 |
| LED8P20D41KFL   | 7W PAR20 - 4100K 40°         | 120 | 7 | 50W | 675 | 96.4 | 1383 | 40 | 4100K | 80 | 12 |
| LED8P20D41KFLB  | 7W PAR20 - 4100K 40° - Black | 120 | 7 | 50W | 675 | 96.4 | 1383 | 40 | 4100K | 80 | 12 |
| LED8P20D41KNFL  | 7W PAR20 - 4100K 25°         | 120 | 7 | 50W | 675 | 96.4 | 2174 | 25 | 4100K | 80 | 12 |
| LED8P20D41KNFLB | 7W PAR20 - 4100K 25° - Black | 120 | 7 | 50W | 675 | 96.4 | 2174 | 25 | 4100K | 80 | 12 |
| LED8P20D41KSP   | 7W PAR20 - 4100K 15°         | 120 | 7 | 50W | 675 | 96.4 | 5411 | 15 | 4100K | 80 | 12 |
| LED8P20D50KFL   | 7W PAR20 - 5000K 40°         | 120 | 7 | 50W | 700 | 100  | 1330 | 40 | 5000K | 80 | 12 |
| LED8P20D50KFLB  | 7W PAR20 - 5000K 40° - Black | 120 | 7 | 50W | 700 | 100  | 1330 | 40 | 5000K | 80 | 12 |
| LED8P20D50KNFL  | 7W PAR20 - 5000K 25°         | 120 | 7 | 50W | 700 | 100  | 2172 | 25 | 5000K | 80 | 12 |
| LED8P20D50KSP   | 7W PAR20 - 5000K 15°         | 120 | 7 | 50W | 700 | 100  | 5599 | 15 | 5000K | 80 | 12 |

Many items are ENERGY STAR® qualified.  
Visit [energystar.gov](http://energystar.gov) for a full listing



5 YEAR  
WARRANTY

Black Housing option available. Add "B" to the end of item #.

Consult [www.tcp.com](http://www.tcp.com) for warranty information.

| Item Number                                   | Item Description      | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CBCP | Beam Angle | CCT   | CRI | Case Quantity |
|-----------------------------------------------|-----------------------|---------|------------|--------------------|--------|-----------------|------|------------|-------|-----|---------------|
| <b>25,000 HOUR DIMMABLE SMD PARS</b>          |                       |         |            |                    |        |                 |      |            |       |     |               |
| <b>15W DIMMABLE SMD PAR38 (REPLACES 150W)</b> |                       |         |            |                    |        |                 |      |            |       |     |               |
| L150P38D2527KFL                               | 15W PAR38 - 2700K 40° | 120     | 15         | 150W               | 1450   | 96.7            | 3403 | 40         | 2700K | 80  | 12            |
| L150P38D2527KNFL                              | 15W PAR38 - 2700K 25° | 120     | 15         | 150W               | 1450   | 96.7            | 7563 | 25         | 2700K | 80  | 12            |
| L150P38D2530KFL                               | 15W PAR38 - 3000K 40° | 120     | 15         | 150W               | 1500   | 100             | 3470 | 40         | 3000K | 80  | 12            |
| L150P38D2530KNFL                              | 15W PAR38 - 3000K 25° | 120     | 15         | 150W               | 1500   | 100             | 7624 | 25         | 3000K | 80  | 12            |
| L150P38D2541KFL                               | 15W PAR38 - 4100K 40° | 120     | 15         | 150W               | 1550   | 103.3           | 3554 | 40         | 4100K | 80  | 12            |
| L150P38D2541KNFL                              | 15W PAR38 - 4100K 25° | 120     | 15         | 150W               | 1550   | 103.3           | 7800 | 25         | 4100K | 80  | 12            |
| L150P38D2550KFL                               | 15W PAR38 - 5000K 40° | 120     | 15         | 150W               | 1600   | 106.7           | 3880 | 40         | 5000K | 80  | 12            |
| L150P38D2550KNFL                              | 15W PAR38 - 5000K 25° | 120     | 15         | 150W               | 1600   | 106.7           | 8028 | 25         | 5000K | 80  | 12            |
| <b>13W DIMMABLE SMD PAR38 (REPLACES 120W)</b> |                       |         |            |                    |        |                 |      |            |       |     |               |
| L120P38D2527KFL                               | 13W PAR38 - 2700K 40° | 120     | 13         | 120W               | 1100   | 84.6            | 2584 | 40         | 2700K | 80  | 12            |
| L120P38D2527KNFL                              | 13W PAR38 - 2700K 25° | 120     | 13         | 120W               | 1100   | 84.6            | 6235 | 25         | 2700K | 80  | 12            |
| L120P38D2530KFL                               | 13W PAR38 - 3000K 40° | 120     | 13         | 120W               | 1200   | 92.3            | 2508 | 40         | 3000K | 80  | 12            |
| L120P38D2530KNFL                              | 13W PAR38 - 3000K 25° | 120     | 13         | 120W               | 1200   | 92.3            | 6661 | 25         | 3000K | 80  | 12            |
| L120P38D2540KFL                               | 13W PAR38 - 4000K 40° | 120     | 13         | 120W               | 1250   | 96.2            | 2348 | 40         | 4000K | 80  | 12            |
| L120P38D2540KNFL                              | 13W PAR38 - 4000K 25° | 120     | 13         | 120W               | 1250   | 96.2            | 6482 | 25         | 4000K | 80  | 12            |
| L120P38D2550KFL                               | 13W PAR38 - 5000K 40° | 120     | 13         | 120W               | 1250   | 96.2            | 2562 | 40         | 5000K | 80  | 12            |
| L120P38D2550KNFL                              | 13W PAR38 - 5000K 25° | 120     | 13         | 120W               | 1250   | 96.2            | 6513 | 25         | 5000K | 80  | 12            |
| <b>10W DIMMABLE SMD PAR38 (REPLACES 90W)</b>  |                       |         |            |                    |        |                 |      |            |       |     |               |
| L90P38D2527KFL                                | 10W PAR38 - 2700K 40° | 120     | 10         | 90W                | 900    | 90              | 1872 | 40         | 2700K | 80  | 12            |
| L90P38D2527KNFL                               | 10W PAR38 - 2700K 25° | 120     | 10         | 90W                | 900    | 90              | 4199 | 25         | 2700K | 80  | 12            |
| L90P38D2530KFL                                | 10W PAR38 - 3000K 40° | 120     | 10         | 90W                | 900    | 90              | 1964 | 40         | 3000K | 80  | 12            |
| L90P38D2530KNFL                               | 10W PAR38 - 3000K 25° | 120     | 10         | 90W                | 900    | 90              | 4384 | 25         | 3000K | 80  | 12            |
| L90P38D2540KFL                                | 10W PAR38 - 4000K 40° | 120     | 10         | 90W                | 950    | 95              | 2017 | 40         | 4000K | 80  | 12            |
| L90P38D2540KNFL                               | 10W PAR38 - 4000K 25° | 120     | 10         | 90W                | 950    | 95              | 4413 | 25         | 4000K | 80  | 12            |
| L90P38D2550KFL                                | 10W PAR38 - 5000K 40° | 120     | 10         | 90W                | 950    | 95              | 2222 | 40         | 5000K | 80  | 12            |
| L90P38D2550KNFL                               | 10W PAR38 - 5000K 25° | 120     | 10         | 90W                | 950    | 95              | 4383 | 25         | 5000K | 80  | 12            |





| Item Number | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CBCP | Beam Angle | CCT | CRI | Case Quantity |
|-------------|------------------|---------|------------|--------------------|--------|-----------------|------|------------|-----|-----|---------------|
|-------------|------------------|---------|------------|--------------------|--------|-----------------|------|------------|-----|-----|---------------|

## 25,000 HOUR DIMMABLE SMD PARS

### 9W DIMMABLE SMD PAR30 (REPLACES 75W)



|                 |                      |     |   |     |     |      |      |    |       |    |    |
|-----------------|----------------------|-----|---|-----|-----|------|------|----|-------|----|----|
| L75P30D2527KFL  | 9W PAR30 - 2700K 40° | 120 | 9 | 75W | 700 | 77.8 | 1640 | 40 | 2700K | 80 | 12 |
| L75P30D2527KNFL | 9W PAR30 - 2700K 25° | 120 | 9 | 75W | 700 | 77.8 | 3419 | 25 | 2700K | 80 | 12 |
| L75P30D2530KFL  | 9W PAR30 - 3000K 40° | 120 | 9 | 75W | 720 | 80   | 1658 | 40 | 3000K | 80 | 12 |
| L75P30D2530KNFL | 9W PAR30 - 3000K 25° | 120 | 9 | 75W | 720 | 80   | 3392 | 25 | 3000K | 80 | 12 |
| L75P30D2540KFL  | 9W PAR30 - 4000K 40° | 120 | 9 | 75W | 770 | 85.6 | 1759 | 40 | 4000K | 80 | 12 |
| L75P30D2540KNFL | 9W PAR30 - 4000K 25° | 120 | 9 | 75W | 770 | 85.6 | 3701 | 25 | 4000K | 80 | 12 |
| L75P30D2550KFL  | 9W PAR30 - 5000K 40° | 120 | 9 | 75W | 770 | 85.6 | 1790 | 40 | 5000K | 80 | 12 |
| L75P30D2550KNFL | 9W PAR30 - 5000K 25° | 120 | 9 | 75W | 770 | 85.6 | 3874 | 25 | 5000K | 80 | 12 |

### 9.5W DIMMABLE SMD PAR30 SHORT NECK (REPLACES 75W)



|                  |                                   |     |     |     |     |      |      |    |       |    |    |
|------------------|-----------------------------------|-----|-----|-----|-----|------|------|----|-------|----|----|
| L75P30SD2527KFL  | 9.5W PAR30 Short Neck - 2700K 40° | 120 | 9.5 | 75W | 720 | 75.8 | 1714 | 40 | 2700K | 80 | 12 |
| L75P30SD2527KNFL | 9.5W PAR30 Short Neck - 2700K 25° | 120 | 9.5 | 75W | 720 | 75.8 | 3051 | 25 | 2700K | 80 | 12 |
| L75P30SD2530KFL  | 9.5W PAR30 Short Neck - 3000K 40° | 120 | 9.5 | 75W | 720 | 75.8 | 1621 | 40 | 3000K | 80 | 12 |
| L75P30SD2530KNFL | 9.5W PAR30 Short Neck - 3000K 25° | 120 | 9.5 | 75W | 720 | 75.8 | 3064 | 25 | 3000K | 80 | 12 |
| L75P30SD2540KFL  | 9.5W PAR30 Short Neck - 4000K 40° | 120 | 9.5 | 75W | 770 | 81.1 | 1714 | 40 | 4000K | 80 | 12 |
| L75P30SD2540KNFL | 9.5W PAR30 Short Neck - 4000K 25° | 120 | 9.5 | 75W | 770 | 81.1 | 2930 | 25 | 4000K | 80 | 12 |
| L75P30SD2550KFL  | 9.5W PAR30 Short Neck - 5000K 40° | 120 | 9.5 | 75W | 770 | 81.1 | 1847 | 40 | 5000K | 80 | 12 |
| L75P30SD2550KNFL | 9.5W PAR30 Short Neck - 5000K 25° | 120 | 9.5 | 75W | 770 | 81.1 | 3274 | 25 | 5000K | 80 | 12 |

### 7W DIMMABLE SMD PAR20 (REPLACES 50W)



|                 |                      |     |   |     |     |      |      |    |       |    |    |
|-----------------|----------------------|-----|---|-----|-----|------|------|----|-------|----|----|
| L50P20D2527KFL  | 7W PAR20 - 2700K 40° | 120 | 7 | 50W | 525 | 75   | 1208 | 40 | 2700K | 80 | 12 |
| L50P20D2527KNFL | 7W PAR20 - 2700K 25° | 120 | 7 | 50W | 525 | 75   | 2030 | 25 | 2700K | 80 | 12 |
| L50P20D2530KFL  | 7W PAR20 - 3000K 40° | 120 | 7 | 50W | 525 | 75   | 1187 | 40 | 3000K | 80 | 12 |
| L50P20D2530KNFL | 7W PAR20 - 3000K 25° | 120 | 7 | 50W | 525 | 75   | 2050 | 25 | 3000K | 80 | 12 |
| L50P20D2540KFL  | 7W PAR20 - 4000K 40° | 120 | 7 | 50W | 575 | 82.1 | 1383 | 40 | 4000K | 80 | 12 |
| L50P20D2540KNFL | 7W PAR20 - 4000K 25° | 120 | 7 | 50W | 575 | 82.1 | 2174 | 25 | 4000K | 80 | 12 |
| L50P20D2550KFL  | 7W PAR20 - 5000K 40° | 120 | 7 | 50W | 575 | 82.1 | 1330 | 40 | 5000K | 80 | 12 |
| L50P20D2550KNFL | 7W PAR20 - 5000K 25° | 120 | 7 | 50W | 575 | 82.1 | 2172 | 25 | 5000K | 80 | 12 |

| Item Number | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CBCP | Beam Angle | CCT | CRI | Case Quantity |
|-------------|------------------|---------|------------|--------------------|--------|-----------------|------|------------|-----|-----|---------------|
|-------------|------------------|---------|------------|--------------------|--------|-----------------|------|------------|-----|-----|---------------|

### 25,000 HOUR DIMMABLE HIGH OUTPUT, HIGH CRI PARs

#### 18.5W DIMMABLE DESIGNER ELITE HIGH OUTPUT HIGH CRI PAR38 (REPLACES 120W) CRI>90 R9>50

|                     |                                                 |     |      |      |      |      |       |    |       |    |    |
|---------------------|-------------------------------------------------|-----|------|------|------|------|-------|----|-------|----|----|
| LED17H0P38D27KFL95  | 18.5W DIM High Output, High CRI P38 - 2700K 40° | 120 | 18.5 | 150W | 1300 | 70.3 | 2231  | 40 | 2700K | 90 | 12 |
| LED17H0P38D27KNFL95 | 18.5W DIM High Output, High CRI P38 - 2700K 25° | 120 | 18.5 | 150W | 1300 | 70.3 | 5382  | 25 | 2700K | 90 | 12 |
| LED17H0P38D27KSP95  | 18.5W DIM High Output, High CRI P38 - 2700K 15° | 120 | 18.5 | 150W | 1300 | 70.3 | 12059 | 15 | 2700K | 90 | 12 |
| LED17H0P38D30KFL95  | 18.5W DIM High Output, High CRI P38 - 3000K 40° | 120 | 18.5 | 150W | 1300 | 70.3 | 2231  | 40 | 3000K | 90 | 12 |
| LED17H0P38D30KNFL95 | 18.5W DIM High Output, High CRI P38 - 3000K 25° | 120 | 18.5 | 150W | 1300 | 70.3 | 5382  | 25 | 3000K | 90 | 12 |
| LED17H0P38D30KSP95  | 18.5W DIM High Output, High CRI P38 - 3000K 15° | 120 | 18.5 | 150W | 1300 | 70.3 | 12059 | 15 | 3000K | 90 | 12 |



### 25,000 HOUR DIMMABLE HIGH CRI PARs

#### 15W DIMMABLE DESIGNER ELITE HIGH CRI PAR38 (REPLACES 90W) CRI>90 R9>50

|                   |                                  |     |    |     |      |    |      |    |       |    |    |
|-------------------|----------------------------------|-----|----|-----|------|----|------|----|-------|----|----|
| LED17P38D27KFL95  | 15W DIM High CRI P38 - 2700K 40° | 120 | 15 | 90W | 1050 | 70 | 1533 | 40 | 2700K | 90 | 12 |
| LED17P38D27KNFL95 | 15W DIM High CRI P38 - 2700K 25° | 120 | 15 | 90W | 1050 | 70 | 3698 | 25 | 2700K | 90 | 12 |
| LED17P38D27KSP95  | 15W DIM High CRI P38 - 2700K 15° | 120 | 15 | 90W | 1050 | 70 | 8285 | 15 | 2700K | 90 | 12 |
| LED17P38D30KFL95  | 15W DIM High CRI P38 - 3000K 40° | 120 | 15 | 90W | 1050 | 70 | 1533 | 40 | 3000K | 90 | 12 |
| LED17P38D30KNFL95 | 15W DIM High CRI P38 - 3000K 25° | 120 | 15 | 90W | 1050 | 70 | 3698 | 25 | 3000K | 90 | 12 |

#### 13.5W DIMMABLE DESIGNER ELITE HIGH CRI PAR38 (REPLACES 75W)

|                   |                                    |     |      |     |      |      |      |    |       |    |    |
|-------------------|------------------------------------|-----|------|-----|------|------|------|----|-------|----|----|
| LED14P38D27KNFL95 | 13.5W DIM High CRI P38 - 2700K 25° | 120 | 13.5 | 75W | 1000 | 74.1 | 3698 | 25 | 2700K | 90 | 12 |
|-------------------|------------------------------------|-----|------|-----|------|------|------|----|-------|----|----|

#### 13.5W DIMMABLE DESIGNER ELITE HIGH CRI PAR30 (REPLACES 75W)

|                   |                                    |     |      |     |      |      |      |    |       |    |    |
|-------------------|------------------------------------|-----|------|-----|------|------|------|----|-------|----|----|
| LED14P30D27KNFL95 | 13.5W DIM High CRI P30 - 2700K 25° | 120 | 13.5 | 75W | 1000 | 74.1 | 2910 | 25 | 2700K | 90 | 12 |
| LED14P30D30KNFL95 | 13.5W DIM High CRI P30 - 3000K 25° | 120 | 13.5 | 75W | 1000 | 74.1 | 2910 | 25 | 3000K | 90 | 12 |



#### 10.5W DIMMABLE DESIGNER ELITE HIGH CRI PAR30 (REPLACES 65W)

|                   |                                    |     |      |     |     |      |      |    |       |    |    |
|-------------------|------------------------------------|-----|------|-----|-----|------|------|----|-------|----|----|
| LED12P30D30KNFL95 | 10.5W DIM High CRI P30 - 3000K 25° | 120 | 10.5 | 65W | 750 | 71.4 | 2118 | 25 | 3000K | 90 | 12 |
|-------------------|------------------------------------|-----|------|-----|-----|------|------|----|-------|----|----|

#### 10W DIMMABLE DESIGNER ELITE HIGH CRI PAR30 SHORT NECK (REPLACES 65W)

|                    |                                             |     |    |     |     |    |      |    |       |    |    |
|--------------------|---------------------------------------------|-----|----|-----|-----|----|------|----|-------|----|----|
| LED12P30SD27KFL95  | 10W DIM High CRI P30 Short Neck - 2700K 40° | 120 | 10 | 65W | 750 | 75 | 957  | 40 | 2700K | 90 | 12 |
| LED12P30SD27KNFL95 | 10W DIM High CRI P30 Short Neck - 2700K 25° | 120 | 10 | 65W | 750 | 75 | 2118 | 25 | 2700K | 90 | 12 |
| LED12P30SD30KFL95  | 10W DIM High CRI P30 Short Neck - 3000K 40° | 120 | 10 | 65W | 750 | 75 | 957  | 40 | 3000K | 90 | 12 |
| LED12P30SD30KNFL95 | 10W DIM High CRI P30 Short Neck - 3000K 25° | 120 | 10 | 65W | 750 | 75 | 2118 | 25 | 3000K | 90 | 12 |
| LED12P30SD30KSP95  | 10W DIM High CRI P30 Short Neck - 3000K 15° | 120 | 10 | 65W | 750 | 75 | 4481 | 15 | 3000K | 90 | 12 |



Many items are ENERGY STAR® qualified.  
Visit [energystar.gov](http://energystar.gov) for a full listing

**5 YEAR WARRANTY**  
Consult [www.tcp.com](http://www.tcp.com) for warranty information.

Black Housing option available. Add "B" to the end of item #.



| Item Number | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | Beam Angle | CCT | CRI | Case Quantity |
|-------------|------------------|---------|------------|--------------------|--------|-----------------|------------|-----|-----|---------------|
|-------------|------------------|---------|------------|--------------------|--------|-----------------|------------|-----|-----|---------------|

## 25,000 HOUR DIMMABLE ELITE BRS

### 17W DIMMABLE ELITE BR40 (REPLACES 90W)



|               |                      |     |    |     |      |      |     |       |    |    |
|---------------|----------------------|-----|----|-----|------|------|-----|-------|----|----|
| LED17BR40D24K | 17W Dim BR40 - 2400K | 120 | 17 | 90W | 1250 | 73.5 | 110 | 2400K | 80 | 12 |
| LED17BR40D27K | 17W Dim BR40 - 2700K | 120 | 17 | 90W | 1400 | 82.4 | 110 | 2700K | 80 | 12 |
| LED17BR40D30K | 17W Dim BR40 - 3000K | 120 | 17 | 90W | 1400 | 82.4 | 110 | 3000K | 80 | 12 |
| LED17BR40D41K | 17W Dim BR40 - 4100K | 120 | 17 | 90W | 1400 | 82.4 | 110 | 4100K | 80 | 12 |
| LED17BR40D50K | 17W Dim BR40 - 5000K | 120 | 17 | 90W | 1400 | 82.4 | 110 | 5000K | 80 | 12 |

### 14W DIMMABLE ELITE BR40 (REPLACES 75W)

|               |                      |     |    |     |      |      |     |       |    |    |
|---------------|----------------------|-----|----|-----|------|------|-----|-------|----|----|
| L85BR40D2524K | 14W Dim BR40 - 2400K | 120 | 14 | 75W | 1050 | 75   | 110 | 2400K | 80 | 12 |
| L85BR40D2527K | 14W Dim BR40 - 2700K | 120 | 14 | 75W | 1100 | 78.6 | 110 | 2700K | 80 | 12 |
| L85BR40D2530K | 14W Dim BR40 - 3000K | 120 | 14 | 75W | 1150 | 82.1 | 110 | 3000K | 80 | 12 |
| L85BR40D2541K | 14W Dim BR40 - 4100K | 120 | 14 | 75W | 1200 | 85.7 | 110 | 4100K | 80 | 12 |
| L85BR40D2550K | 14W Dim BR40 - 5000K | 120 | 14 | 75W | 1200 | 85.7 | 110 | 5000K | 80 | 12 |

### 10.5W DIMMABLE ELITE BR30 (REPLACES 65W)



|               |                        |     |      |     |     |      |     |       |    |    |
|---------------|------------------------|-----|------|-----|-----|------|-----|-------|----|----|
| LED12BR30D24K | 10.5W Dim BR30 - 2400K | 120 | 10.5 | 65W | 680 | 64.8 | 110 | 2400K | 80 | 12 |
| LED12BR30D27K | 10.5W Dim BR30 - 2700K | 120 | 10.5 | 65W | 850 | 81.0 | 110 | 2700K | 80 | 12 |
| LED12BR30D30K | 10.5W Dim BR30 - 3000K | 120 | 10.5 | 65W | 850 | 81.0 | 110 | 3000K | 80 | 12 |
| LED12BR30D41K | 10.5W Dim BR30 - 4100K | 120 | 10.5 | 65W | 850 | 81.0 | 110 | 4100K | 80 | 12 |
| LED12BR30D50K | 10.5W Dim BR30 - 5000K | 120 | 10.5 | 65W | 850 | 81.0 | 110 | 5000K | 80 | 12 |

### 9.5W DIMMABLE ELITE BR30 (REPLACES 65W)



|              |                       |     |     |     |     |      |     |       |    |    |
|--------------|-----------------------|-----|-----|-----|-----|------|-----|-------|----|----|
| LED9BR30D24K | 9.5W Dim BR30 - 2400K | 120 | 9.5 | 65W | 600 | 63.2 | 110 | 2400K | 80 | 12 |
| LED9BR30D27K | 9.5W Dim BR30 - 2700K | 120 | 9.5 | 65W | 700 | 73.7 | 110 | 2700K | 80 | 12 |
| LED9BR30D30K | 9.5W Dim BR30 - 3000K | 120 | 9.5 | 65W | 700 | 73.7 | 110 | 3000K | 80 | 12 |
| LED9BR30D41K | 9.5W Dim BR30 - 4100K | 120 | 9.5 | 65W | 750 | 78.9 | 110 | 4100K | 80 | 12 |
| LED9BR30D50K | 9.5W Dim BR30 - 5000K | 120 | 9.5 | 65W | 750 | 78.9 | 110 | 5000K | 80 | 12 |

### 9W DIMMABLE ELITE R20 (REPLACES 60W)



|              |                    |     |   |     |     |      |     |       |    |    |
|--------------|--------------------|-----|---|-----|-----|------|-----|-------|----|----|
| LED10R20D24K | 9W Dim R20 - 2400K | 120 | 9 | 60W | 520 | 57.8 | 110 | 2400K | 80 | 12 |
| LED10R20D27K | 9W Dim R20 - 2700K | 120 | 9 | 60W | 660 | 73.3 | 110 | 2700K | 80 | 12 |
| LED10R20D30K | 9W Dim R20 - 3000K | 120 | 9 | 60W | 700 | 77.8 | 110 | 3000K | 80 | 12 |
| LED10R20D41K | 9W Dim R20 - 4100K | 120 | 9 | 60W | 725 | 80.6 | 110 | 4100K | 80 | 12 |
| LED10R20D50K | 9W Dim R20 - 5000K | 120 | 9 | 60W | 750 | 83.3 | 110 | 5000K | 80 | 12 |

### 7.5W DIMMABLE ELITE R20 (REPLACES 50W)

|             |                      |     |     |     |     |      |     |       |    |    |
|-------------|----------------------|-----|-----|-----|-----|------|-----|-------|----|----|
| L7R20D2524K | 7.5W Dim R20 - 2400K | 120 | 7.5 | 50W | 400 | 53.3 | 110 | 2400K | 80 | 12 |
| L7R20D2527K | 7.5W Dim R20 - 2700K | 120 | 7.5 | 50W | 525 | 70   | 110 | 2700K | 80 | 12 |
| L7R20D2530K | 7.5W Dim R20 - 3000K | 120 | 7.5 | 50W | 525 | 70   | 110 | 3000K | 80 | 12 |
| L7R20D2541K | 7.5W Dim R20 - 4100K | 120 | 7.5 | 50W | 525 | 70   | 110 | 4100K | 80 | 12 |
| L7R20D2550K | 7.5W Dim R20 - 5000K | 120 | 7.5 | 50W | 525 | 70   | 110 | 5000K | 80 | 12 |

Many items are ENERGY STAR® qualified.  
Visit [energystar.gov](http://energystar.gov) for a full listing



5 YEAR  
WARRANTY

Consult [www.tpci.com](http://www.tpci.com) for warranty information.

| Item Number                                  | Item Description           | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | Beam Angle | CCT   | CRI | Case Quantity |                                                                                       |
|----------------------------------------------|----------------------------|---------|------------|--------------------|--------|-----------------|------------|-------|-----|---------------|---------------------------------------------------------------------------------------|
| 15,000 HOUR DIMMABLE ELITE BRS 2 Pack        |                            |         |            |                    |        |                 |            |       |     |               |                                                                                       |
| 9W DIMMABLE ELITE BR30 (REPLACES 65W)        |                            |         |            |                    |        |                 |            |       |     |               |                                                                                       |
| L8BR30D1527K2                                | 9W Dim BR30 - 2700K 2 Pack | 120     | 9          | 65W                | 650    | 72.2            | 110        | 2700K | 80  | 12            |    |
| L8BR30D1530K2                                | 9W Dim BR30 - 3000K 2 Pack | 120     | 9          | 65W                | 650    | 72.2            | 110        | 3000K | 80  | 12            |                                                                                       |
| L8BR30D1541K2                                | 9W Dim BR30 - 4100K 2 Pack | 120     | 9          | 65W                | 650    | 72.2            | 110        | 4100K | 80  | 12            |                                                                                       |
| L8BR30D1550K2                                | 9W Dim BR30 - 5000K 2 Pack | 120     | 9          | 65W                | 650    | 72.2            | 110        | 5000K | 80  | 12            |                                                                                       |
| 25,000 HOUR NON DIMMABLE ELITE BRS           |                            |         |            |                    |        |                 |            |       |     |               |                                                                                       |
| 17W NON DIMMABLE ELITE BR40 (REPLACES 90W)   |                            |         |            |                    |        |                 |            |       |     |               |                                                                                       |
| LED17BR4027K                                 | 14W Non Dim BR40 - 2700K   | 120     | 17         | 90W                | 1400   | 82.4            | 110        | 2700K | 80  | 12            |    |
| LED17BR4030K                                 | 14W Non Dim BR40 - 3000K   | 120     | 17         | 90W                | 1400   | 82.4            | 110        | 3000K | 80  | 12            |                                                                                       |
| LED17BR4041K                                 | 14W Non Dim BR40 - 4100K   | 120     | 17         | 90W                | 1400   | 82.4            | 110        | 4100K | 80  | 12            |                                                                                       |
| 10.5W NON DIMMABLE ELITE BR30 (REPLACES 65W) |                            |         |            |                    |        |                 |            |       |     |               |                                                                                       |
| LED12BR3027K                                 | 10.5W Non Dim BR30 - 2700K | 120     | 10.5       | 65W                | 850    | 81.0            | 110        | 2700K | 80  | 12            |   |
| LED12BR3030K                                 | 10.5W Non Dim BR30 - 3000K | 120     | 10.5       | 65W                | 850    | 81.0            | 110        | 3000K | 80  | 12            |                                                                                       |
| LED12BR3041K                                 | 10.5W Non Dim BR30 - 4100K | 120     | 10.5       | 65W                | 850    | 81.0            | 110        | 4100K | 80  | 12            |                                                                                       |
| 8.5W NON DIMMABLE ELITE BR30 (REPLACES 65W)  |                            |         |            |                    |        |                 |            |       |     |               |                                                                                       |
| LED10BR3027K                                 | 8.5W Non Dim BR30 - 2700K  | 120     | 8.5        | 65W                | 650    | 76.5            | 110        | 2700K | 80  | 12            |  |
| LED10BR3030K                                 | 8.5W Non Dim BR30 - 3000K  | 120     | 8.5        | 65W                | 650    | 76.5            | 110        | 3000K | 80  | 12            |                                                                                       |
| LED10BR3041K                                 | 8.5W Non Dim BR30 - 4100K  | 120     | 8.5        | 65W                | 650    | 76.5            | 110        | 4100K | 80  | 12            |                                                                                       |
| LED10BR3050K                                 | 8.5W Non Dim BR30 - 5000K  | 120     | 8.5        | 65W                | 650    | 76.5            | 110        | 5000K | 80  | 12            |                                                                                       |
| 25,000 HOUR DIMMABLE ELITE COLORED BRS       |                            |         |            |                    |        |                 |            |       |     |               |                                                                                       |
| 12W DIMMABLE ELITE BR30 - COLORED LENS       |                            |         |            |                    |        |                 |            |       |     |               |                                                                                       |
| LED12BR30DAMB                                | 12W Elite BR30 Amber Lens  | 120     | 9.5        | 65W                | NA     | —               | 110        | Amber | —   | 12            |  |

Many items are ENERGY STAR® qualified.  
Visit [energystar.gov](http://energystar.gov) for a full listing

**5 YEAR WARRANTY**  
Consult [www.tcp.com](http://www.tcp.com) for warranty information.

Other housing colors are available by special request.



| Item Number | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CCT | CRI | Case Quantity |
|-------------|------------------|---------|------------|--------------------|--------|-----------------|-----|-----|---------------|
|-------------|------------------|---------|------------|--------------------|--------|-----------------|-----|-----|---------------|

### 25,000 HOUR ELITE OMNIDIRECTIONAL A-LAMPS (REPLACES 100W)

#### 15W DIMMABLE A19 - ELITE OMNIDIRECTIONAL A-LAMP (REPLACES 100W)



|              |                                          |     |    |      |      |       |       |    |    |
|--------------|------------------------------------------|-----|----|------|------|-------|-------|----|----|
| L15A19D2527K | Dimmable 15W Omnidirectional A19 - 2700K | 120 | 15 | 100W | 1600 | 106.7 | 2700K | 80 | 12 |
| L15A19D2530K | Dimmable 15W Omnidirectional A19 - 3000K | 120 | 15 | 100W | 1600 | 106.7 | 3000K | 80 | 12 |
| L15A19D2541K | Dimmable 15W Omnidirectional A19 - 4100K | 120 | 15 | 100W | 1600 | 106.7 | 4100K | 80 | 12 |
| L15A19D2550K | Dimmable 15W Omnidirectional A19 - 5000K | 120 | 15 | 100W | 1600 | 106.7 | 5000K | 80 | 12 |

### 15,000 HOUR OMNIDIRECTIONAL A-LAMPS (REPLACES 100W)

#### 15W DIMMABLE A19 - OMNIDIRECTIONAL (REPLACES 100W)



|              |                                          |     |    |      |      |       |       |    |    |
|--------------|------------------------------------------|-----|----|------|------|-------|-------|----|----|
| L15A21D1527K | Dimmable 15W Omnidirectional A19 - 2700K | 120 | 15 | 100W | 1600 | 106.7 | 2700K | 80 | 12 |
| L15A21D1530K | Dimmable 15W Omnidirectional A19 - 3000K | 120 | 15 | 100W | 1650 | 110   | 3000K | 80 | 12 |
| L15A21D1541K | Dimmable 15W Omnidirectional A19 - 4100K | 120 | 15 | 100W | 1700 | 113.3 | 4100K | 80 | 12 |
| L15A21D1550K | Dimmable 15W Omnidirectional A19 - 5000K | 120 | 15 | 100W | 1750 | 116.7 | 5000K | 80 | 12 |

#### 15W NON-DIMMABLE A19 - OMNIDIRECTIONAL (REPLACES 100W)



|              |                                              |     |    |      |      |       |       |    |    |
|--------------|----------------------------------------------|-----|----|------|------|-------|-------|----|----|
| L16A19N1527K | Non-Dimmable 15W Omnidirectional A19 - 2700K | 120 | 15 | 100W | 1600 | 106.7 | 2700K | 80 | 12 |
| L16A19N1530K | Non-Dimmable 15W Omnidirectional A19 - 3000K | 120 | 15 | 100W | 1650 | 110   | 3000K | 80 | 12 |
| L16A19N1541K | Non-Dimmable 15W Omnidirectional A19 - 4100K | 120 | 15 | 100W | 1700 | 113.3 | 4100K | 80 | 12 |
| L16A19N1550K | Non-Dimmable 15W Omnidirectional A19 - 5000K | 120 | 15 | 100W | 1750 | 116.7 | 5000K | 80 | 12 |

### 10,000 HOUR GENERAL PURPOSE A-LAMPS (REPLACES 100W)

#### 14W NON-DIMMABLE A19 - GENERAL PURPOSE A-LAMP (REPLACES 100W) 4 PACK



|               |                                                     |     |    |      |      |       |       |    |    |
|---------------|-----------------------------------------------------|-----|----|------|------|-------|-------|----|----|
| L16A19N1027K4 | Non-Dimmable 14W General Purpose A19 - 2700K 4 Pack | 120 | 14 | 100W | 1500 | 107.1 | 2700K | 80 | 12 |
| L16A19N1041K4 | Non-Dimmable 14W General Purpose A19 - 4100K 4 Pack | 120 | 14 | 100W | 1500 | 107.1 | 4100K | 80 | 12 |

Many items are ENERGY STAR® qualified.  
Visit [energystar.gov](http://energystar.gov) for a full listing

Consult [www.tcp.com](http://www.tcp.com) for warranty information.



**5 YEAR**  
WARRANTY  
25,000 HOUR LAMPS

**3 YEAR**  
WARRANTY  
15,000 HOUR LAMPS

**1 YEAR**  
WARRANTY  
10,000 HOUR LAMPS

| Item Number                                                             | Item Description                             | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CCT   | CRI | Case Quantity |
|-------------------------------------------------------------------------|----------------------------------------------|---------|------------|--------------------|--------|-----------------|-------|-----|---------------|
| <b>25,000 HOUR ELITE OMNIDIRECTIONAL A-LAMPS (REPLACES 75W)</b>         |                                              |         |            |                    |        |                 |       |     |               |
| <b>11.5W DIMMABLE A19 - ELITE OMNIDIRECTIONAL A-LAMP (REPLACES 75W)</b> |                                              |         |            |                    |        |                 |       |     |               |
| L11A19D2527K                                                            | Dimmable 11.5W Omnidirectional A19 - 2700K   | 120     | 11.5       | 75W                | 1100   | 95.7            | 2700K | 80  | 12            |
| L11A19D2530K                                                            | Dimmable 11.5W Omnidirectional A19 - 3000K   | 120     | 11.5       | 75W                | 1100   | 95.7            | 3000K | 80  | 12            |
| L11A19D2541K                                                            | Dimmable 11.5W Omnidirectional A19 - 4100K   | 120     | 11.5       | 75W                | 1100   | 95.7            | 4100K | 80  | 12            |
| L11A19D2550K                                                            | Dimmable 11.5W Omnidirectional A19 - 5000K   | 120     | 11.5       | 75W                | 1100   | 95.7            | 5000K | 80  | 12            |
| <b>15,000 HOUR OMNIDIRECTIONAL A-LAMPS (REPLACES 75W)</b>               |                                              |         |            |                    |        |                 |       |     |               |
| <b>11W NON-DIMMABLE A19 - OMNIDIRECTIONAL (REPLACES 75W)</b>            |                                              |         |            |                    |        |                 |       |     |               |
| L11A19N1527K                                                            | Non-Dimmable 11W Omnidirectional A19 - 2700K | 120     | 11         | 75W                | 1100   | 100             | 2700K | 80  | 12            |
| L11A19N1530K                                                            | Non-Dimmable 11W Omnidirectional A19 - 3000K | 120     | 11         | 75W                | 1100   | 100             | 3000K | 80  | 12            |
| L11A19N1541K                                                            | Non-Dimmable 11W Omnidirectional A19 - 4100K | 120     | 11         | 75W                | 1100   | 100             | 4100K | 80  | 12            |
| L11A19N1550K                                                            | Non-Dimmable 11W Omnidirectional A19 - 5000K | 120     | 11         | 75W                | 1100   | 100             | 5000K | 80  | 12            |
| <b>25,000 HOUR ELITE OMNIDIRECTIONAL A-LAMPS (REPLACES 60W)</b>         |                                              |         |            |                    |        |                 |       |     |               |
| <b>9W DIMMABLE A19 - ELITE OMNIDIRECTIONAL A-LAMP (REPLACES 60W)</b>    |                                              |         |            |                    |        |                 |       |     |               |
| L9A19D2524K                                                             | Dimmable 9W OmniDirectional A19 - 2400K      | 120     | 9          | 60W                | 700    | 77.7            | 2400K | 80  | 12            |
| L9A19D2527K                                                             | Dimmable 9W OmniDirectional A19 - 2700K      | 120     | 9          | 60W                | 800    | 88.9            | 2700K | 80  | 12            |
| L9A19D2530K                                                             | Dimmable 9W OmniDirectional A19 - 3000K      | 120     | 9          | 60W                | 800    | 88.9            | 3000K | 80  | 12            |
| L9A19D2541K                                                             | Dimmable 9W OmniDirectional A19 - 4100K      | 120     | 9          | 60W                | 825    | 91.7            | 4100K | 80  | 12            |
| L9A19D2550K                                                             | Dimmable 9W OmniDirectional A19 - 5000K      | 120     | 9          | 60W                | 825    | 91.7            | 5000K | 80  | 12            |





| Item Number | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CCT | CRI | Case Quantity |
|-------------|------------------|---------|------------|--------------------|--------|-----------------|-----|-----|---------------|
|-------------|------------------|---------|------------|--------------------|--------|-----------------|-----|-----|---------------|

### 15,000 HOUR ELITE OMNIDIRECTIONAL A-LAMPS (REPLACES 60W)

#### 9W DIMMABLE A19 - OMNIDIRECTIONAL A-LAMP (REPLACES 60W)



|             |                                         |     |   |     |     |      |       |    |    |
|-------------|-----------------------------------------|-----|---|-----|-----|------|-------|----|----|
| L9A19D1527K | Dimmable 9W Omnidirectional A19 - 2700K | 120 | 9 | 60W | 800 | 88.9 | 2700K | 80 | 12 |
| L9A19D1530K | Dimmable 9W Omnidirectional A19 - 3000K | 120 | 9 | 60W | 800 | 88.9 | 3000K | 80 | 12 |
| L9A19D1541K | Dimmable 9W Omnidirectional A19 - 4100K | 120 | 9 | 60W | 825 | 91.7 | 4100K | 80 | 12 |
| L9A19D1550K | Dimmable 9W Omnidirectional A19 - 5000K | 120 | 9 | 60W | 825 | 91.7 | 5000K | 80 | 12 |

#### 9W DIMMABLE A19 - OMNIDIRECTIONAL A-LAMP (REPLACES 60W) 4 PACK

|              |                                                |     |   |     |     |      |       |    |    |
|--------------|------------------------------------------------|-----|---|-----|-----|------|-------|----|----|
| L9A19D1527K4 | Dimmable 9W Omnidirectional A19 4 Pack - 2700K | 120 | 9 | 60W | 800 | 88.9 | 2700K | 80 | 12 |
| L9A19D1530K4 | Dimmable 9W Omnidirectional A19 4 Pack - 3000K | 120 | 9 | 60W | 800 | 88.9 | 3000K | 80 | 12 |
| L9A19D1541K4 | Dimmable 9W Omnidirectional A19 4 Pack - 4100K | 120 | 9 | 60W | 825 | 91.7 | 4100K | 80 | 12 |
| L9A19D1550K4 | Dimmable 9W Omnidirectional A19 4 Pack - 5000K | 120 | 9 | 60W | 825 | 91.7 | 5000K | 80 | 12 |

#### 9W NON-DIMMABLE A19 - OMNIDIRECTIONAL (REPLACES 60W)



|              |                                             |     |   |     |     |      |       |    |    |
|--------------|---------------------------------------------|-----|---|-----|-----|------|-------|----|----|
| L60A19N1527K | Non-Dimmable 9W Omnidirectional A19 - 2700K | 120 | 9 | 60W | 800 | 88.9 | 2700K | 80 | 12 |
| L60A19N1530K | Non-Dimmable 9W Omnidirectional A19 - 3000K | 120 | 9 | 60W | 800 | 88.9 | 3000K | 80 | 12 |
| L60A19N1541K | Non-Dimmable 9W Omnidirectional A19 - 4100K | 120 | 9 | 60W | 850 | 94.4 | 4100K | 80 | 12 |
| L60A19N1550K | Non-Dimmable 9W Omnidirectional A19 - 5000K | 120 | 9 | 60W | 850 | 94.4 | 5000K | 80 | 12 |

### 10,000 HOUR GENERAL PURPOSE A-LAMPS (REPLACES 60W)

#### 9.5W NON-DIMMABLE A19 - GENERAL PURPOSE A-LAMP (REPLACES 60W) 4 PACK



|              |                                                      |     |   |     |     |      |       |    |    |
|--------------|------------------------------------------------------|-----|---|-----|-----|------|-------|----|----|
| L9A19N1027K4 | Non-Dimmable 9.5W General Purpose A19 - 2700K 4 Pack | 120 | 9 | 60W | 800 | 84.2 | 2700K | 80 | 12 |
| L9A19N1030K4 | Non-Dimmable 9.5W General Purpose A19 - 3000K 4 Pack | 120 | 9 | 60W | 800 | 84.2 | 3000K | 80 | 12 |
| L9A19N1041K4 | Non-Dimmable 9.5W General Purpose A19 - 4100K 4 Pack | 120 | 9 | 60W | 800 | 84.2 | 4100K | 80 | 12 |
| L9A19N1050K4 | Non-Dimmable 9.5W General Purpose A19 - 5000K 4 Pack | 120 | 9 | 60W | 800 | 84.2 | 5000K | 80 | 12 |

### 25,000 HOUR ELITE OMNIDIRECTIONAL A-LAMPS (REPLACES 40W)

#### 6W DIMMABLE A19 - ELITE OMNIDIRECTIONAL A-LAMP (REPLACES 40W)



|              |                                         |     |   |     |     |      |       |    |    |
|--------------|-----------------------------------------|-----|---|-----|-----|------|-------|----|----|
| L40A19D2524K | Dimmable 6W Omnidirectional A19 - 2400K | 120 | 6 | 40W | 375 | 62.5 | 2400K | 80 | 12 |
| L40A19D2527K | Dimmable 6W Omnidirectional A19 - 2700K | 120 | 6 | 40W | 480 | 80.0 | 2700K | 80 | 12 |
| L40A19D2530K | Dimmable 6W Omnidirectional A19 - 3000K | 120 | 6 | 40W | 480 | 80.0 | 3000K | 80 | 12 |
| L40A19D2541K | Dimmable 6W Omnidirectional A19 - 4100K | 120 | 6 | 40W | 500 | 83.3 | 4100K | 80 | 12 |
| L40A19D2550K | Dimmable 6W Omnidirectional A19 - 5000K | 120 | 6 | 40W | 525 | 87.2 | 5000K | 80 | 12 |

### 15,000 HOUR OMNIDIRECTIONAL A-LAMPS (REPLACES 40W)

#### 6W NON-DIMMABLE A19 - OMNIDIRECTIONAL (REPLACES 40W)



|             |                                             |     |   |     |     |      |       |    |    |
|-------------|---------------------------------------------|-----|---|-----|-----|------|-------|----|----|
| L6A19N1527K | Non-Dimmable 6W Omnidirectional A19 - 2700K | 120 | 6 | 40W | 480 | 80.0 | 2700K | 80 | 12 |
| L6A19N1530K | Non-Dimmable 6W Omnidirectional A19 - 3000K | 120 | 6 | 40W | 480 | 80.0 | 3000K | 80 | 12 |
| L6A19N1541K | Non-Dimmable 6W Omnidirectional A19 - 4100K | 120 | 6 | 40W | 480 | 80.0 | 4100K | 80 | 12 |
| L6A19N1550K | Non-Dimmable 6W Omnidirectional A19 - 5000K | 120 | 6 | 40W | 480 | 80.0 | 5000K | 80 | 12 |

| Item Number                                                  | Item Description                              | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CCT   | CRI | Case Quantity |
|--------------------------------------------------------------|-----------------------------------------------|---------|------------|--------------------|--------|-----------------|-------|-----|---------------|
| 25,000 HOUR ELITE GU24 BASED A-LAMPS (REPLACES 60W)          |                                               |         |            |                    |        |                 |       |     |               |
| 10W GU24 BASED DIMMABLE A19 - OMNIDIRECTIONAL (REPLACES 60W) |                                               |         |            |                    |        |                 |       |     |               |
| LED10A19GUDOD27K                                             | Dimmable 10W GU24 OmniDirectional A19 - 2700K | 120     | 10         | 60W                | 850    | 85              | 2700K | 80  | 12            |
| LED10A19GUDOD30K                                             | Dimmable 10W GU24 OmniDirectional A19 - 3000K | 120     | 10         | 60W                | 850    | 85              | 3000K | 80  | 12            |
| LED10A19GUDOD41K                                             | Dimmable 10W GU24 OmniDirectional A19 - 4100K | 120     | 10         | 60W                | 850    | 85              | 4100K | 80  | 12            |





|                                                                      |                                               |     |    |      |      |       |       |    |    |
|----------------------------------------------------------------------|-----------------------------------------------|-----|----|------|------|-------|-------|----|----|
| <b>25,000 HOUR ELITE GU24 BASED A-LAMPS (REPLACES 100W)</b>          |                                               |     |    |      |      |       |       |    |    |
| <b>14W GU24 BASED DIMMABLE A21 - OMNIDIRECTIONAL (REPLACES 100W)</b> |                                               |     |    |      |      |       |       |    |    |
| L14A21GUD2527K                                                       | Dimmable 14W GU24 OmniDirectional A21 - 2700K | 120 | 14 | 100W | 1600 | 114.3 | 2700K | 80 | 12 |
| L14A21GUD2530K                                                       | Dimmable 14W GU24 OmniDirectional A21 - 3000K | 120 | 14 | 100W | 1600 | 114.3 | 3000K | 80 | 12 |
| L14A21GUD2541K                                                       | Dimmable 14W GU24 OmniDirectional A21 - 4100K | 120 | 14 | 100W | 1700 | 121.4 | 4100K | 80 | 12 |
| L14A21GUD2550K                                                       | Dimmable 14W GU24 OmniDirectional A21 - 5000K | 120 | 14 | 100W | 1700 | 121.4 | 5000K | 80 | 12 |



|                                                                    |                                                        |     |     |     |     |      |       |    |    |
|--------------------------------------------------------------------|--------------------------------------------------------|-----|-----|-----|-----|------|-------|----|----|
| <b>25,000 HOUR ELITE 60W WET LOCATION A-LAMPS (REPLACES 60W)</b>   |                                                        |     |     |     |     |      |       |    |    |
| <b>9.5W WET LOCATION A19 OMNIDIRECTIONAL A-LAMP (REPLACES 60W)</b> |                                                        |     |     |     |     |      |       |    |    |
| LED10A19DOD27KW                                                    | Dimmable 9.5W Omnidirectional Wet Location A19 - 2700K | 120 | 9.5 | 60W | 800 | 84.2 | 2700K | 80 | 12 |
| LED10A19DOD30KW                                                    | Dimmable 9.5W Omnidirectional Wet Location A19 - 3000K | 120 | 9.5 | 60W | 825 | 86.8 | 3000K | 80 | 12 |
| LED10A19DOD41KW                                                    | Dimmable 9.5W Omnidirectional Wet Location A19 - 4100K | 120 | 9.5 | 60W | 850 | 89.5 | 4100K | 80 | 12 |
| LED10A19DOD50KW                                                    | Dimmable 9.5W Omnidirectional Wet Location A19 - 5000K | 120 | 9.5 | 60W | 850 | 89.5 | 5000K | 80 | 12 |



| Item Number                                                          | Item Description      | Voltage | Wattage/Lumens |     |     | Wattage/LPW |     |     | CCT   | CRI | Case Quantity |
|----------------------------------------------------------------------|-----------------------|---------|----------------|-----|-----|-------------|-----|-----|-------|-----|---------------|
|                                                                      |                       |         | 16W            | 8W  | 4W  | 16W         | 8W  | 4W  |       |     |               |
|                                                                      |                       |         |                |     |     |             |     |     |       |     |               |
| 25,000 HOUR ELITE 100W LED THREE WAY A-LAMPS (REPLACES 100W/60W/40W) |                       |         |                |     |     |             |     |     |       |     |               |
| 16W/8W/4W A21 - THREE WAY A-LAMPS (REPLACES 100W/60W/40W)            |                       |         |                |     |     |             |     |     |       |     |               |
| LED16A21D3WAY27K                                                     | 16W/8W/4W A21 - 2700K | 120     | 1600           | 800 | 480 | 100         | 100 | 120 | 2700K | 80  | 12            |
| LED16A21D3WAY30K                                                     | 16W/8W/4W A21 - 3000K | 120     | 1600           | 800 | 480 | 100         | 100 | 120 | 3000K | 80  | 12            |
| LED16A21D3WAY41K                                                     | 16W/8W/4W A21 - 4100K | 120     | 1600           | 800 | 480 | 100         | 100 | 120 | 4100K | 80  | 12            |
| LED16A21D3WAY50K                                                     | 16W/8W/4W A21 - 5000K | 120     | 1600           | 800 | 480 | 100         | 100 | 120 | 5000K | 80  | 12            |





| Item Number | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | Beam Angle | CCT | CRI | Case Quantity |
|-------------|------------------|---------|------------|--------------------|--------|-----------------|------------|-----|-----|---------------|
|-------------|------------------|---------|------------|--------------------|--------|-----------------|------------|-----|-----|---------------|

## 25,000 HOUR ELITE GU5.3 50W DIMMABLE LED MR16

### 7W DIMMABLE ELITE VALUE GU5.3 12V MR16 (50W EQUIVALENT)



FL



NFL

|                    |                         |    |     |     |     |      |    |       |    |    |
|--------------------|-------------------------|----|-----|-----|-----|------|----|-------|----|----|
| LED712VMR16V24KNFL | 7W 12V MR16 - 2400K 20° | 12 | 7   | 50W | 450 | 64.3 | 20 | 2400K | 80 | 12 |
| LED712VMR16V24KFL  | 7W 12V MR16 - 2400K 40° | 12 | 6.5 | 50W | 450 | 69.2 | 40 | 2400K | 80 | 12 |
| LED712VMR16V27KNFL | 7W 12V MR16 - 2700K 20° | 12 | 7   | 50W | 500 | 71.4 | 20 | 2700K | 80 | 12 |
| LED712VMR16V27KFL  | 7W 12V MR16 - 2700K 40° | 12 | 6.5 | 50W | 500 | 76.9 | 40 | 2700K | 80 | 12 |
| LED712VMR16V30KNFL | 7W 12V MR16 - 3000K 20° | 12 | 7   | 50W | 500 | 71.4 | 20 | 3000K | 80 | 12 |
| LED712VMR16V30KFL  | 7W 12V MR16 - 3000K 40° | 12 | 6.5 | 50W | 500 | 76.9 | 40 | 3000K | 80 | 12 |
| LED712VMR16V41KNFL | 7W 12V MR16 - 4100K 20° | 12 | 7   | 50W | 500 | 71.4 | 20 | 4100K | 80 | 12 |
| LED712VMR16V41KFL  | 7W 12V MR16 - 4100K 40° | 12 | 6.5 | 50W | 500 | 76.9 | 40 | 4100K | 80 | 12 |
| LED712VMR16V50KFL  | 7W 12V MR16 - 5000K 40° | 12 | 7   | 50W | 500 | 71.4 | 40 | 5000K | 80 | 12 |

### 7W DIMMABLE ELITE GU5.3 12V MR16 (50W EQUIVALENT) HIGH CRI CRI>90 R9>50



|                     |                                 |    |     |     |     |      |    |       |    |    |
|---------------------|---------------------------------|----|-----|-----|-----|------|----|-------|----|----|
| LED712VMR16927KNFL  | 7W 12V MR16 - 2700K 20°         | 12 | 7   | 50W | 425 | 60.7 | 20 | 2700K | 90 | 12 |
| LED712VMR16927KNFLB | 7W 12V MR16 - 2700K 20° - Black | 12 | 7   | 50W | 425 | 60.7 | 20 | 2700K | 90 | 12 |
| LED712VMR16927KFL   | 7W 12V MR16 - 2700K 40°         | 12 | 6.5 | 50W | 425 | 65.4 | 40 | 2700K | 90 | 12 |
| LED712VMR16927KFLB  | 7W 12V MR16 - 2700K 40° - Black | 12 | 6.5 | 50W | 425 | 65.4 | 40 | 2700K | 90 | 12 |
| LED712VMR16930KNFL  | 7W 12V MR16 - 3000K 20°         | 12 | 7   | 50W | 425 | 60.7 | 20 | 3000K | 90 | 12 |
| LED712VMR16930KFL   | 7W 12V MR16 - 3000K 40°         | 12 | 6.5 | 50W | 425 | 65.4 | 40 | 3000K | 90 | 12 |
| LED712VMR16941KNFL  | 7W 12V MR16 - 4100K 20°         | 12 | 7   | 50W | 425 | 60.7 | 20 | 4100K | 90 | 12 |
| LED712VMR16941KFL   | 7W 12V MR16 - 4100K 40°         | 12 | 6.5 | 50W | 470 | 72.3 | 40 | 4100K | 80 | 12 |

### 5W DIMMABLE ELITE VALUE GU5.3 12V MR16 (35W EQUIVALENT)



|                   |                         |    |   |     |     |    |    |       |    |    |
|-------------------|-------------------------|----|---|-----|-----|----|----|-------|----|----|
| LED512VMR1627KNFL | 5W 12V MR16 - 2700K 20° | 12 | 5 | 35W | 400 | 80 | 20 | 2700K | 80 | 12 |
| LED512VMR1627KFL  | 5W 12V MR16 - 2700K 40° | 12 | 5 | 35W | 400 | 80 | 40 | 2700K | 80 | 12 |
| LED512VMR1630KNFL | 5W 12V MR16 - 3000K 20° | 12 | 5 | 35W | 400 | 80 | 20 | 3000K | 80 | 12 |
| LED512VMR1630KFL  | 5W 12V MR16 - 3000K 40° | 12 | 5 | 35W | 400 | 80 | 40 | 3000K | 80 | 12 |
| LED512VMR1641KFL  | 5W 12V MR16 - 4100K 40° | 12 | 5 | 35W | 400 | 80 | 40 | 4100K | 80 | 12 |

| Item Number | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CBCP | Beam Angle | CCT | CRI | Case Quantity |
|-------------|------------------|---------|------------|--------------------|--------|-----------------|------|------------|-----|-----|---------------|
|-------------|------------------|---------|------------|--------------------|--------|-----------------|------|------------|-----|-----|---------------|

## 25,000 HOUR ELITE DIMMABLE LED GU10

### 7W DIMMABLE ELITE GU10 (50W EQUIVALENT)

|                   |                          |     |     |     |     |    |   |    |       |    |    |
|-------------------|--------------------------|-----|-----|-----|-----|----|---|----|-------|----|----|
| LED7GU10MR1627KFL | 5W GU10 MR16 - 2700K 40° | 120 | 5.5 | 35W | 385 | 70 | – | 40 | 2700K | 80 | 12 |
| LED7GU10MR1630KFL | 5W GU10 MR16 - 3000K 40° | 120 | 5.5 | 35W | 385 | 70 | – | 40 | 3000K | 80 | 12 |
| LED7GU10MR1641KFL | 5W GU10 MR16 - 4100K 40° | 120 | 5.5 | 35W | 385 | 70 | – | 40 | 4100K | 80 | 12 |

### 7W DIMMABLE DESIGNER ELITE GU10 (50W EQUIVALENT)

|                    |                            |     |     |     |     |      |   |    |       |    |    |
|--------------------|----------------------------|-----|-----|-----|-----|------|---|----|-------|----|----|
| LED7MR16GU1024KFL  | 6W GU10 MR16 - 2400K 40°   | 120 | 6   | 50W | 450 | 75   | – | 40 | 2400K | 80 | 12 |
| LED7MR16GU1027KNFL | 5.5W GU10 MR16 - 2700K 40° | 120 | 5.5 | 50W | 500 | 90.9 | – | 20 | 2700K | 80 | 12 |
| LED7MR16GU1027KFL  | 6W GU10 MR16 - 2700K 40°   | 120 | 6   | 50W | 500 | 83.3 | – | 40 | 2700K | 80 | 12 |
| LED7MR16GU1030KNFL | 5.5W GU10 MR16 - 3000K 20° | 120 | 5.5 | 50W | 500 | 90.9 | – | 20 | 3000K | 80 | 12 |
| LED7MR16GU1030KFL  | 6W GU10 MR16 - 3000K 40°   | 120 | 6   | 50W | 500 | 83.3 | – | 40 | 3000K | 80 | 12 |
| LED7MR16GU1041KNFL | 7W GU10 MR16 - 4100K 20°   | 120 | 5.5 | 50W | 500 | 90.9 | – | 20 | 4100K | 80 | 12 |
| LED7MR16GU1041KFL  | 7W GU10 MR16 - 4100K 40°   | 120 | 6   | 50W | 500 | 83.3 | – | 40 | 4100K | 80 | 12 |

## 25,000 HOUR ELITE DIMMABLE LED PAR16

### 7W DIMMABLE PAR16 (50W EQUIVALENT)

|               |                      |     |   |     |     |      |      |    |       |    |    |
|---------------|----------------------|-----|---|-----|-----|------|------|----|-------|----|----|
| LED7P1624KFL  | 7W PAR16 - 2400K 40° | 120 | 7 | 50W | 500 | 71.4 | 1052 | 40 | 2400K | 80 | 12 |
| LED7P1627KNFL | 7W PAR16 - 2700K 20° | 120 | 7 | 50W | 500 | 71.4 | 3296 | 20 | 2700K | 80 | 12 |
| LED7P1627KFL  | 7W PAR16 - 2700K 40° | 120 | 7 | 50W | 500 | 71.4 | 1057 | 40 | 2700K | 80 | 12 |
| LED7P1630KNFL | 7W PAR16 - 3000K 20° | 120 | 7 | 50W | 500 | 71.4 | 3296 | 20 | 3000K | 80 | 12 |
| LED7P1630KFL  | 7W PAR16 - 3000K 40° | 120 | 7 | 50W | 500 | 71.4 | 1057 | 40 | 3000K | 80 | 12 |
| LED7P1641KNFL | 7W PAR16 - 4100K 20° | 120 | 7 | 50W | 500 | 71.4 | 3296 | 20 | 4100K | 80 | 12 |
| LED7P1641KFL  | 7W PAR16 - 4100K 40° | 120 | 7 | 50W | 500 | 71.4 | 1057 | 40 | 4100K | 80 | 12 |



| Item Number | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | LPW | CCT | CRI | Case Quantity |
|-------------|------------------|---------|------------|--------------------|--------|-----|-----|-----|---------------|
|-------------|------------------|---------|------------|--------------------|--------|-----|-----|-----|---------------|

## 25,000 HOUR DIMMABLE LED G25

### DIMMABLE 4W AND 6W G25 FROSTED



|              |                                 |     |   |     |     |      |       |    |    |
|--------------|---------------------------------|-----|---|-----|-----|------|-------|----|----|
| LED5G25D27KF | Dimmable 4W G25 - 2700K Frosted | 120 | 4 | 40W | 350 | 87.5 | 2700K | 80 | 12 |
| LED5G25D30KF | Dimmable 4W G25 - 3000K Frosted | 120 | 4 | 40W | 350 | 87.5 | 3000K | 80 | 12 |
| L6G25D2527KF | Dimmable 6W G25 - 2700K Frosted | 120 | 6 | 60W | 525 | 87.5 | 2700K | 80 | 12 |
| L6G25D2530KF | Dimmable 6W G25 - 3000K Frosted | 120 | 6 | 60W | 525 | 87.5 | 3000K | 80 | 12 |

## 25,000 HOUR NON DIMMABLE LED WET LOCATION S14

### NON DIMMABLE 5W WET LOCATION S14



|                |                                         |     |   |     |     |    |       |    |    |
|----------------|-----------------------------------------|-----|---|-----|-----|----|-------|----|----|
| LED5E26S1427K  | LED 4W Wet Location S14 - 2700K Clear   | 120 | 4 | 40W | 300 | 75 | 2700K | 80 | 12 |
| LED5E26S1430K  | LED 4W Wet Location S14 - 3000K Clear   | 120 | 4 | 40W | 300 | 75 | 3000K | 80 | 12 |
| LED5E26S1441K  | LED 4W Wet Location S14 - 4100K Clear   | 120 | 4 | 40W | 300 | 75 | 4100K | 80 | 12 |
| LED5E26S1427KF | LED 4W Wet Location S14 - 2700K Frosted | 120 | 4 | 40W | 300 | 75 | 2700K | 80 | 12 |
| LED5E26S1430KF | LED 4W Wet Location S14 - 3000K Frosted | 120 | 4 | 40W | 300 | 75 | 3000K | 80 | 12 |
| LED5E26S1441KF | LED 4W Wet Location S14 - 4100K Frosted | 120 | 4 | 40W | 300 | 75 | 4100K | 80 | 12 |

Many items are ENERGY STAR® qualified.  
Visit [energystar.gov](http://energystar.gov) for a full listing

5 YEAR WARRANTY

Consult [www.tcp.com](http://www.tcp.com) for warranty information.

| Item Number                                | Item Description                              | Voltage | Lamp Watts | Wattage Equivalent | Lumens | LPW | CCT (Kelvin) | CRI | Case Quantity |                                                                                       |
|--------------------------------------------|-----------------------------------------------|---------|------------|--------------------|--------|-----|--------------|-----|---------------|---------------------------------------------------------------------------------------|
| <b>25,000 HOUR DIMMABLE LED DECO LAMPS</b> |                                               |         |            |                    |        |     |              |     |               |                                                                                       |
| <b>DIMMABLE 5W DECO LAMPS</b>              |                                               |         |            |                    |        |     |              |     |               |                                                                                       |
| LED5E12G1627K                              | LED 5W Dim Candelabra G16 Globe - 2700K       | 120     | 5          | 40W                | 350    | 70  | 2700K        | 80  | 12            |    |
| LED5E26G1627K                              | LED 5W Dim G16 Globe - 2700K                  | 120     | 5          | 40W                | 350    | 70  | 2700K        | 80  | 12            |                                                                                       |
| LED5E12G1627KF                             | LED 5W Dim Candelabra Frost G16 Globe - 2700K | 120     | 5          | 40W                | 350    | 70  | 2700K        | 80  | 12            |    |
| LED5E26G1627KF                             | LED 5W Dim Frost G16 Globe - 2700K            | 120     | 5          | 40W                | 350    | 70  | 2700K        | 80  | 12            |                                                                                       |
| LED5E12B1127K                              | LED 5W Dim Candelabra Blunt Tip - 2700K       | 120     | 5          | 40W                | 350    | 70  | 2700K        | 80  | 12            |    |
| LED5E12B1130K                              | LED 5W Dim Candelabra Blunt Tip - 3000K       | 120     | 5          | 40W                | 375    | 75  | 3000K        | 80  | 12            |                                                                                       |
| LED5E12B1150K                              | LED 5W Dim Candelabra Blunt Tip - 5000K       | 120     | 5          | 40W                | 375    | 75  | 5000K        | 80  | 12            |  |
| LED5E26B1127K                              | LED 5W Dim Blunt Tip - 2700K                  | 120     | 5          | 40W                | 350    | 70  | 2700K        | 80  | 12            |                                                                                       |
| LED5E26B1130K                              | LED 5W Dim Blunt Tip - 3000K                  | 120     | 5          | 40W                | 375    | 75  | 3000K        | 80  | 12            |  |
| LED5E12B1124KF                             | LED 5W Dim Candelabra Frost Blunt Tip - 2400K | 120     | 5          | 40W                | 300    | 60  | 2400K        | 80  | 12            |                                                                                       |
| LED5E12B1127KF                             | LED 5W Dim Candelabra Frost Blunt Tip - 2700K | 120     | 5          | 40W                | 350    | 70  | 2700K        | 80  | 12            |  |
| LED5E12B1150KF                             | LED 5W Dim Candelabra Frost Blunt Tip - 5000K | 120     | 5          | 40W                | 375    | 75  | 5000K        | 80  | 12            |                                                                                       |
| LED5E26B1127KF                             | LED 5W Dim Frost Blunt Tip - 2700K            | 120     | 5          | 40W                | 350    | 70  | 2700K        | 80  | 12            |  |
| LED5E12F1127K                              | LED 5W Dim Candelabra F11 Flame Tip - 2700K   | 120     | 5          | 40W                | 350    | 70  | 2700K        | 80  | 12            |                                                                                       |
| LED5E26F1127K                              | LED 5W Dim F11 Flame Tip - 2700K              | 120     | 5          | 40W                | 350    | 70  | 2700K        | 80  | 12            |                                                                                       |

| Item Number | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | LPW | CCT (Kelvin) | CRI | Case Quantity |
|-------------|------------------|---------|------------|--------------------|--------|-----|--------------|-----|---------------|
|-------------|------------------|---------|------------|--------------------|--------|-----|--------------|-----|---------------|

## 25,000 HOUR DIMMABLE LED DECO LAMPS (CONTINUED)

### DIMMABLE 4W DECO LAMPS



|               |                                         |     |   |     |     |    |       |    |    |
|---------------|-----------------------------------------|-----|---|-----|-----|----|-------|----|----|
| LED4E12G1627K | LED 4W Dim Candelabra G16 Globe - 2700K | 120 | 4 | 25W | 280 | 70 | 2700K | 80 | 12 |
|---------------|-----------------------------------------|-----|---|-----|-----|----|-------|----|----|

|               |                              |     |   |     |     |    |       |    |    |
|---------------|------------------------------|-----|---|-----|-----|----|-------|----|----|
| LED4E26G1627K | LED 4W Dim G16 Globe - 2700K | 120 | 4 | 25W | 280 | 70 | 2700K | 80 | 12 |
|---------------|------------------------------|-----|---|-----|-----|----|-------|----|----|



|                |                                               |     |   |     |     |    |       |    |    |
|----------------|-----------------------------------------------|-----|---|-----|-----|----|-------|----|----|
| LED4E12G1627KF | LED 4W Dim Candelabra Frost G16 Globe - 2700K | 120 | 4 | 25W | 280 | 70 | 2700K | 80 | 12 |
|----------------|-----------------------------------------------|-----|---|-----|-----|----|-------|----|----|

|                |                                    |     |   |     |     |    |       |    |    |
|----------------|------------------------------------|-----|---|-----|-----|----|-------|----|----|
| LED4E26G1627KF | LED 4W Dim Frost G16 Globe - 2700K | 120 | 4 | 25W | 280 | 70 | 2700K | 80 | 12 |
|----------------|------------------------------------|-----|---|-----|-----|----|-------|----|----|



|               |                                         |     |   |     |     |      |       |    |    |
|---------------|-----------------------------------------|-----|---|-----|-----|------|-------|----|----|
| LED4E12B1124K | LED 4W Dim Candelabra Blunt Tip - 2400K | 120 | 4 | 25W | 250 | 62.5 | 2400K | 80 | 12 |
|---------------|-----------------------------------------|-----|---|-----|-----|------|-------|----|----|

|               |                                         |     |   |     |     |    |       |    |    |
|---------------|-----------------------------------------|-----|---|-----|-----|----|-------|----|----|
| LED4E12B1127K | LED 4W Dim Candelabra Blunt Tip - 2700K | 120 | 4 | 25W | 280 | 70 | 2700K | 80 | 12 |
|---------------|-----------------------------------------|-----|---|-----|-----|----|-------|----|----|



|               |                              |     |   |     |     |      |       |    |    |
|---------------|------------------------------|-----|---|-----|-----|------|-------|----|----|
| LED4E26B1124K | LED 4W Dim Blunt Tip - 2400K | 120 | 4 | 25W | 250 | 62.5 | 2400K | 80 | 12 |
|---------------|------------------------------|-----|---|-----|-----|------|-------|----|----|

|               |                              |     |   |     |     |    |       |    |    |
|---------------|------------------------------|-----|---|-----|-----|----|-------|----|----|
| LED4E26B1127K | LED 4W Dim Blunt Tip - 2700K | 120 | 4 | 25W | 280 | 70 | 2700K | 80 | 12 |
|---------------|------------------------------|-----|---|-----|-----|----|-------|----|----|



|                |                                                 |     |   |     |     |    |       |    |    |
|----------------|-------------------------------------------------|-----|---|-----|-----|----|-------|----|----|
| LED4E12B1127KF | LED 4W Dim Candelabra Frosted Blunt Tip - 2700K | 120 | 4 | 25W | 280 | 70 | 2700K | 80 | 12 |
|----------------|-------------------------------------------------|-----|---|-----|-----|----|-------|----|----|

|                |                                      |     |   |     |     |    |       |    |    |
|----------------|--------------------------------------|-----|---|-----|-----|----|-------|----|----|
| LED4E26B1127KF | LED 4W Dim Frosted Blunt Tip - 2700K | 120 | 4 | 25W | 280 | 70 | 2700K | 80 | 12 |
|----------------|--------------------------------------|-----|---|-----|-----|----|-------|----|----|



|               |                                         |     |   |     |     |    |       |    |    |
|---------------|-----------------------------------------|-----|---|-----|-----|----|-------|----|----|
| LED4E12F1127K | LED 4W Dim Candelabra F11 Flame - 2700K | 120 | 4 | 25W | 280 | 70 | 2700K | 80 | 12 |
|---------------|-----------------------------------------|-----|---|-----|-----|----|-------|----|----|

|               |                                  |     |   |     |     |    |       |    |    |
|---------------|----------------------------------|-----|---|-----|-----|----|-------|----|----|
| LED4E26F1127K | LED 4W Dim F11 Flame Tip - 2700K | 120 | 4 | 25W | 280 | 70 | 2700K | 80 | 12 |
|---------------|----------------------------------|-----|---|-----|-----|----|-------|----|----|

Many items are ENERGY STAR® qualified.  
Visit [energystar.gov](http://energystar.gov) for a full listing



3 YEAR  
WARRANTY

Consult [www.tcp.com](http://www.tcp.com) for warranty information.

| Item Number                                         | Item Description                   | Voltage  | Lamp Watts | Wattage Equivalent | Lamp Lumens | LPW   | Color Temperature | Base | CRI | Beam Angle | Power Factor | Case Quantity |
|-----------------------------------------------------|------------------------------------|----------|------------|--------------------|-------------|-------|-------------------|------|-----|------------|--------------|---------------|
| <b>25,000 HOUR LED 120-277V LAMPS</b>               |                                    |          |            |                    |             |       |                   |      |     |            |              |               |
| <b>LED 18W LED Non DIMMABLE A23 125W EQUIVALENT</b> |                                    |          |            |                    |             |       |                   |      |     |            |              |               |
| L125A23N25UNV27K                                    | LED 125W A23 UNV, E26 Base - 2700K | 120-277v | 18         | 125                | 2000        | 111.1 | 2700              | E26  | 80  | —          | ≥0.9         | 48            |
| L125A23N25UNV30K                                    | LED 125W A23 UNV, E26 Base - 3000K | 120-277v | 18         | 125                | 2000        | 111.1 | 3000              | E26  | 80  | —          | ≥0.9         | 48            |
| L125A23N25UNV40K                                    | LED 125W A23 UNV, E26 Base - 4000K | 120-277v | 18         | 125                | 2100        | 116.7 | 4000              | E26  | 80  | —          | ≥0.9         | 48            |
| L125A23N25UNV50K                                    | LED 125W A23 UNV, E26 Base - 5000K | 120-277v | 18         | 125                | 2200        | 122.2 | 2700              | E26  | 80  | —          | ≥0.9         | 48            |
| <b>LED 14W LED Non DIMMABLE A21 100W EQUIVALENT</b> |                                    |          |            |                    |             |       |                   |      |     |            |              |               |
| L100A21N25UNV27K                                    | LED 100W A21 UNV, E26 Base - 2700K | 120-277v | 14         | 100                | 1600        | 114.3 | 2700              | E26  | 80  | —          | ≥0.7         | 48            |
| L100A21N25UNV30K                                    | LED 100W A21 UNV, E26 Base - 3000K | 120-277v | 14         | 100                | 1625        | 116.1 | 3000              | E26  | 80  | —          | ≥0.7         | 48            |
| L100A21N25UNV40K                                    | LED 100W A21 UNV, E26 Base - 4000K | 120-277v | 14         | 100                | 1650        | 117.9 | 4000              | E26  | 80  | —          | ≥0.7         | 48            |
| L100A21N25UNV50K                                    | LED 100W A21 UNV, E26 Base - 5000K | 120-277v | 14         | 100                | 1650        | 117.9 | 5000              | E26  | 80  | —          | ≥0.7         | 48            |
| <b>LED 7.5W LED Non DIMMABLE A19 60W EQUIVALENT</b> |                                    |          |            |                    |             |       |                   |      |     |            |              |               |
| L60A19N25UNV27K                                     | LED 60W A19 UNV, E26 Base - 2700K  | 120-277v | 7.5        | 60                 | 800         | 106.7 | 2700              | E26  | 80  | —          | ≥0.5         | 48            |
| L60A19N25UNV30K                                     | LED 60W A19 UNV, E26 Base - 3000K  | 120-277v | 7.5        | 60                 | 800         | 106.7 | 3000              | E26  | 80  | —          | ≥0.5         | 48            |
| L60A19N25UNV40K                                     | LED 60W A19 UNV, E26 Base - 4000K  | 120-277v | 7.5        | 60                 | 850         | 113.3 | 4000              | E26  | 80  | —          | ≥0.5         | 48            |
| L60A19N25UNV50K                                     | LED 60W A19 UNV, E26 Base - 5000K  | 120-277v | 7.5        | 60                 | 875         | 116.7 | 5000              | E26  | 80  | —          | ≥0.5         | 48            |





| Item Number | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lamp Lumens | LPW | Color Temperature | Base | CRI | Beam Angle | Power Factor | Case Quantity |
|-------------|------------------|---------|------------|--------------------|-------------|-----|-------------------|------|-----|------------|--------------|---------------|
|-------------|------------------|---------|------------|--------------------|-------------|-----|-------------------|------|-----|------------|--------------|---------------|

## 25,000 HOUR LED 120-277V LAMPS (CONTINUED)

### LED 9.5W LED Non DIMMABLE BR30 65W EQUIVALENT



|                  |                                    |          |     |    |     |       |      |     |    |   |      |    |
|------------------|------------------------------------|----------|-----|----|-----|-------|------|-----|----|---|------|----|
| L65BR30N25UNV27K | LED 65W BR30 UNV, E26 Base - 2700K | 120-277v | 9.5 | 65 | 875 | 92.1  | 2700 | E26 | 80 | - | ≥0.7 | 12 |
| L65BR30N25UNV30K | LED 65W BR30 UNV, E26 Base - 3000K | 120-277v | 9.5 | 65 | 900 | 94.7  | 3000 | E26 | 80 | - | ≥0.7 | 12 |
| L65BR30N25UNV40K | LED 65W BR30 UNV, E26 Base - 4000K | 120-277v | 9.5 | 65 | 925 | 97.4  | 4000 | E26 | 80 | - | ≥0.7 | 12 |
| L65BR30N25UNV50K | LED 65W BR30 UNV, E26 Base - 5000K | 120-277v | 9.5 | 65 | 975 | 102.6 | 5000 | E26 | 80 | - | ≥0.7 | 12 |

### LED 13W LED Non DIMMABLE BR30 100W EQUIVALENT



|                   |                                     |          |    |     |      |       |      |     |    |   |      |    |
|-------------------|-------------------------------------|----------|----|-----|------|-------|------|-----|----|---|------|----|
| L100BR30N25UNV27K | LED 100W BR30 UNV, E26 Base - 2700K | 120-277v | 13 | 100 | 1400 | 107.7 | 2700 | E26 | 80 | - | ≥0.7 | 12 |
| L100BR30N25UNV30K | LED 100W BR30 UNV, E26 Base - 3000K | 120-277v | 13 | 100 | 1450 | 111.5 | 3000 | E26 | 80 | - | ≥0.7 | 12 |
| L100BR30N25UNV40K | LED 100W BR30 UNV, E26 Base - 4000K | 120-277v | 13 | 100 | 1500 | 115.4 | 4000 | E26 | 80 | - | ≥0.7 | 12 |
| L100BR30N25UNV50K | LED 100W BR30 UNV, E26 Base - 5000K | 120-277v | 13 | 100 | 1550 | 119.2 | 5000 | E26 | 80 | - | ≥0.7 | 12 |

### LED 12.5W LED Non DIMMABLE PAR38 120W EQUIVALENT



|                     |                                                   |          |      |     |      |    |      |     |    |   |      |    |
|---------------------|---------------------------------------------------|----------|------|-----|------|----|------|-----|----|---|------|----|
| L100P38N25UNV27KFL  | LED 100W PAR38 UNV, E26 Base - 2700K Flood        | 120-277v | 12.5 | 120 | 1100 | 88 | 2700 | E26 | 80 | - | ≥0.7 | 12 |
| L100P38N25UNV30KFL  | LED 100W PAR38 UNV, E26 Base - 3000K Flood        | 120-277v | 12.5 | 120 | 1100 | 88 | 3000 | E26 | 80 | - | ≥0.7 | 12 |
| L100P38N25UNV40KFL  | LED 100W PAR38 UNV, E26 Base - 4000K Flood        | 120-277v | 12.5 | 120 | 1150 | 92 | 4000 | E26 | 80 | - | ≥0.7 | 12 |
| L100P38N25UNV50KFL  | LED 100W PAR38 UNV, E26 Base - 5000K Flood        | 120-277v | 12.5 | 120 | 1200 | 96 | 5000 | E26 | 80 | - | ≥0.7 | 12 |
| L100P38N25UNV27KNFL | LED 100W PAR38 UNV, E26 Base - 2700K Narrow Flood | 120-277v | 12.5 | 120 | 1100 | 88 | 2700 | E26 | 80 | - | ≥0.7 | 12 |
| L100P38N25UNV30KNFL | LED 100W PAR38 UNV, E26 Base - 3000K Narrow Flood | 120-277v | 12.5 | 120 | 1100 | 88 | 3000 | E26 | 80 | - | ≥0.7 | 12 |
| L100P38N25UNV40KNFL | LED 100W PAR38 UNV, E26 Base - 4000K Narrow Flood | 120-277v | 12.5 | 120 | 1150 | 92 | 4000 | E26 | 80 | - | ≥0.7 | 12 |
| L100P38N25UNV50KNFL | LED 100W PAR38 UNV, E26 Base - 5000K Narrow Flood | 120-277v | 12.5 | 120 | 1200 | 96 | 5000 | E26 | 80 | - | ≥0.7 | 12 |

| Item Number | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | LPW | CCT | Beam Angle | CRI | Case Quantity |
|-------------|------------------|---------|------------|--------------------|--------|-----|-----|------------|-----|---------------|
|-------------|------------------|---------|------------|--------------------|--------|-----|-----|------------|-----|---------------|

### 25,000 HOUR ALLUSION LED 15W PAR38 WITH SMOOTH WARM DIMMING (REPLACES 90W)

|             |                        |     |      |     |     |    |                |    |    |    |
|-------------|------------------------|-----|------|-----|-----|----|----------------|----|----|----|
| L15P38DNFLA | 15W PAR38 Narrow Flood | 120 | 12.5 | 90W | 975 | 78 | 3000K to 2000K | 25 | 80 | 12 |
| L15P38DFLA  | 15W PAR38 Flood        | 120 | 12.5 | 90W | 975 | 78 | 3000K to 2000K | 40 | 80 | 12 |



### 25,000 HOUR ALLUSION LED 15W PAR30 WITH SMOOTH WARM DIMMING (REPLACES 90W)

|             |                        |     |      |     |     |    |                |    |    |    |
|-------------|------------------------|-----|------|-----|-----|----|----------------|----|----|----|
| L15P30DNFLA | 15W PAR30 Narrow Flood | 120 | 12.5 | 90W | 950 | 76 | 3000K to 2000K | 25 | 80 | 12 |
| L15P30DFLA  | 15W PAR30 Flood        | 120 | 12.5 | 90W | 950 | 76 | 3000K to 2000K | 40 | 80 | 12 |



### 25,000 HOUR ALLUSION LED 7W PAR20 WITH SMOOTH WARM DIMMING (REPLACES 50W)

|            |                       |     |     |     |     |      |                |    |    |    |
|------------|-----------------------|-----|-----|-----|-----|------|----------------|----|----|----|
| L7P20DNFLA | 7W PAR20 Narrow Flood | 120 | 6.5 | 50W | 525 | 80.8 | 3000K to 2000K | 25 | 80 | 12 |
| L7P20DFLA  | 7W PAR20 Flood        | 120 | 6.5 | 50W | 525 | 80.8 | 3000K to 2000K | 40 | 80 | 12 |



### 25,000 HOUR ALLUSION LED 7W MR16 WITH SMOOTH WARM DIMMING (REPLACES 50W)

|                |                      |     |   |     |     |      |                |    |    |    |
|----------------|----------------------|-----|---|-----|-----|------|----------------|----|----|----|
| L712VMR16DNFLA | 7W MR16 Narrow Flood | 120 | 6 | 50W | 350 | 58.3 | 3000K to 1800K | 20 | 80 | 12 |
|----------------|----------------------|-----|---|-----|-----|------|----------------|----|----|----|



### 30,000 HOUR ALLUSION LED 13W SL16 WITH SMOOTH WARM DIMMING

|             |          |     |    |   |      |      |                |     |    |   |
|-------------|----------|-----|----|---|------|------|----------------|-----|----|---|
| L15SL16D30A | 13W SL16 | 120 | 13 | — | 1200 | 92.3 | 3000K to 2000K | 110 | 80 | 6 |
|-------------|----------|-----|----|---|------|------|----------------|-----|----|---|



### 25,000 HOUR ALLUSION LED 10W 5/6" RECESSED DOWNLIGHTS WITH SMOOTH WARM DIMMING

|             |                               |     |    |     |      |     |                |     |    |   |
|-------------|-------------------------------|-----|----|-----|------|-----|----------------|-----|----|---|
| LED10DR56DA | 10W 5 5/8" Recessed Downlight | 120 | 11 | 65W | 1100 | 100 | 3000K to 2000K | 120 | 80 | 6 |
|-------------|-------------------------------|-----|----|-----|------|-----|----------------|-----|----|---|



### 25,000 HOUR ALLUSION LED 10W BR30 WITH SMOOTH WARM DIMMING (REPLACES 65W)

|             |          |     |    |     |     |      |                |     |    |    |
|-------------|----------|-----|----|-----|-----|------|----------------|-----|----|----|
| LED10BR30DA | 10W BR30 | 120 | 10 | 65W | 675 | 67.5 | 3000K to 2000K | 110 | 80 | 12 |
|-------------|----------|-----|----|-----|-----|------|----------------|-----|----|----|



### 25,000 HOUR ALLUSION LED 9W A LAMPS WITH SMOOTH WARM DIMMING

|           |               |     |   |     |     |      |                |   |    |    |
|-----------|---------------|-----|---|-----|-----|------|----------------|---|----|----|
| LED9A19DA | 9W A19 A-Lamp | 120 | 9 | 60W | 650 | 72.2 | 2700K to 2000K | — | 80 | 12 |
|-----------|---------------|-----|---|-----|-----|------|----------------|---|----|----|



### 25,000 HOUR ALLUSION LED 5W B11 DECO WITH SMOOTH WARM DIMMING

|               |                                      |     |   |     |     |    |                |   |    |    |
|---------------|--------------------------------------|-----|---|-----|-----|----|----------------|---|----|----|
| LED5E12B11DA  | 5W B11 Candelabra Blunt Tip          | 120 | 5 | 25W | 300 | 60 | 2400K to 1900K | — | 82 | 12 |
| LED5E12B11DAF | 5W B11 Candelabra Blunt Tip, Frosted | 120 | 5 | 25W | 300 | 60 | 2400K to 1900K | — | 82 | 12 |





Item Number

Item Description

Voltage

Lamp Watts

Wattage Equivalent

Lumens

Lumens Per Watt

CBCP

Beam Angle

CCT

CRI

Base

Case Quantity

**15,000 HOUR PRO DIMMABLE LED PARS****13W DIMMABLE PRO LINE PAR38 (REPLACES 90W)**

|                 |                                    |     |    |     |      |      |   |    |       |    |     |    |
|-----------------|------------------------------------|-----|----|-----|------|------|---|----|-------|----|-----|----|
| L90P38D15V30KFL | 13W Dimmable PAR38 - 3000K 40° Pro | 120 | 13 | 90W | 1100 | 84.6 | - | 40 | 3000K | 80 | E26 | 12 |
|-----------------|------------------------------------|-----|----|-----|------|------|---|----|-------|----|-----|----|

**13W DIMMABLE PRO LINE PAR38 2 PACK (REPLACES 90W)**

|                  |                                           |     |    |     |      |      |   |    |       |    |     |    |
|------------------|-------------------------------------------|-----|----|-----|------|------|---|----|-------|----|-----|----|
| L90P38D15V30KFL2 | 13W Dimmable PAR38 - 3000K 40° Pro 2 Pack | 120 | 13 | 90W | 1100 | 84.6 | - | 40 | 3000K | 80 | E26 | 12 |
|------------------|-------------------------------------------|-----|----|-----|------|------|---|----|-------|----|-----|----|

|                  |                                           |     |    |     |      |      |   |    |       |    |     |    |
|------------------|-------------------------------------------|-----|----|-----|------|------|---|----|-------|----|-----|----|
| L90P38D15V41KFL2 | 13W Dimmable PAR38 - 4100K 40° Pro 2 Pack | 120 | 13 | 90W | 1100 | 84.6 | - | 40 | 4100K | 80 | E26 | 12 |
|------------------|-------------------------------------------|-----|----|-----|------|------|---|----|-------|----|-----|----|

|                  |                                           |     |    |     |      |      |   |    |       |    |     |    |
|------------------|-------------------------------------------|-----|----|-----|------|------|---|----|-------|----|-----|----|
| L90P38D15V50KFL2 | 13W Dimmable PAR38 - 5000K 40° Pro 2 Pack | 120 | 13 | 90W | 1100 | 84.6 | - | 40 | 5000K | 80 | E26 | 12 |
|------------------|-------------------------------------------|-----|----|-----|------|------|---|----|-------|----|-----|----|

**9W DIMMABLE PRO LINE PAR30 (REPLACES 75W)**

|                 |                                       |     |   |     |     |    |   |    |       |    |     |    |
|-----------------|---------------------------------------|-----|---|-----|-----|----|---|----|-------|----|-----|----|
| L75P30D15V30KFL | LED 9W Dimmable PAR30 - 3000K 40° Pro | 120 | 9 | 75W | 720 | 80 | - | 40 | 3000K | 80 | E26 | 12 |
|-----------------|---------------------------------------|-----|---|-----|-----|----|---|----|-------|----|-----|----|

**7W DIMMABLE PRO LINE PAR20 (REPLACES 50W)**

|                 |                                       |     |   |     |     |    |   |    |       |    |     |    |
|-----------------|---------------------------------------|-----|---|-----|-----|----|---|----|-------|----|-----|----|
| L50P20D15V30KFL | LED 7W Dimmable PAR20 - 3000K 40° Pro | 120 | 7 | 50W | 525 | 75 | - | 40 | 3000K | 80 | E26 | 12 |
|-----------------|---------------------------------------|-----|---|-----|-----|----|---|----|-------|----|-----|----|

**15,000 HOUR PRO DIMMABLE LED BRs****14W DIMMABLE PRO LINE BR40 (REPLACES 75W)**

|                |                                   |     |    |     |      |      |     |   |       |    |     |    |
|----------------|-----------------------------------|-----|----|-----|------|------|-----|---|-------|----|-----|----|
| L75BR40D15V27K | LED 14W Dimmable BR40 - 2700K Pro | 120 | 14 | 75W | 1065 | 76.1 | 110 | - | 2700K | 80 | E26 | 12 |
|----------------|-----------------------------------|-----|----|-----|------|------|-----|---|-------|----|-----|----|

**9W DIMMABLE PRO LINE BR30 (REPLACES 65W)**

|                |                                  |     |   |     |     |      |     |   |       |    |     |    |
|----------------|----------------------------------|-----|---|-----|-----|------|-----|---|-------|----|-----|----|
| L65BR30D15V27K | LED 9W Dimmable BR30 - 2700K Pro | 120 | 9 | 65W | 650 | 72.2 | 110 | - | 2700K | 80 | E26 | 12 |
|----------------|----------------------------------|-----|---|-----|-----|------|-----|---|-------|----|-----|----|

**7.5W DIMMABLE PRO LINE R20 (REPLACES 50W)**

|               |                                 |     |     |     |     |      |     |   |       |    |     |    |
|---------------|---------------------------------|-----|-----|-----|-----|------|-----|---|-------|----|-----|----|
| L50R20D15V27K | LED 7W Dimmable R20 - 2700K Pro | 120 | 7.5 | 50W | 500 | 66.7 | 110 | - | 2700K | 80 | E26 | 12 |
|---------------|---------------------------------|-----|-----|-----|-----|------|-----|---|-------|----|-----|----|

| Item Number | Item Description | Voltage | Lamp Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CBCP | Beam Angle | CCT | CRI | Base | Case Quantity |
|-------------|------------------|---------|------------|--------------------|--------|-----------------|------|------------|-----|-----|------|---------------|
|-------------|------------------|---------|------------|--------------------|--------|-----------------|------|------------|-----|-----|------|---------------|

### 15,000 HOUR PRO DIMMABLE LED ALL GLASS DECORATIVE

#### 4W DIMMABLE PRO LINE G25 (REPLACES 40W)

|             |                                         |     |   |     |     |      |   |   |       |    |     |    |
|-------------|-----------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|
| FG25D40V27W | LED 4W Dimmable G25 - 2700K Frosted Pro | 120 | 4 | 40W | 350 | 87.5 | - | - | 2700K | 80 | E26 | 12 |
|-------------|-----------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|



#### 4W DIMMABLE PRO LINE B11 (REPLACES 40W)

|                |                                         |     |   |     |     |      |   |   |       |    |     |    |
|----------------|-----------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|
| FB11D40V27E12C | LED 4W Dimmable B11 - 2700K Frosted Pro | 120 | 4 | 40W | 350 | 87.5 | - | - | 2700K | 80 | E12 | 12 |
|----------------|-----------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|

|                |                                         |     |   |     |     |      |   |   |       |    |     |    |
|----------------|-----------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|
| FB11D40V50E12C | LED 4W Dimmable B11 - 5000K Frosted Pro | 120 | 4 | 40W | 350 | 87.5 | - | - | 5000K | 80 | E12 | 12 |
|----------------|-----------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|



### 15,000 HOUR LED ALL GLASS A19 – PROLINE

#### DIMMABLE 8W ALL GLASS A19 – PROLINE

|                |                                         |     |   |     |     |      |   |   |       |    |     |    |
|----------------|-----------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|
| LFF60A19D1527K | LED 8W Dimmable A19 - 2700K Frosted Pro | 120 | 8 | 60W | 725 | 90.6 | - | - | 2700K | 80 | E26 | 12 |
|----------------|-----------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|

|                |                                         |     |   |     |     |      |   |   |       |    |     |    |
|----------------|-----------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|
| LFF60A19D1550K | LED 8W Dimmable A19 - 5000K Frosted Pro | 120 | 8 | 60W | 725 | 90.6 | - | - | 5000K | 80 | E26 | 12 |
|----------------|-----------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|

|                |                                       |     |   |     |     |      |   |   |       |    |     |    |
|----------------|---------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|
| LFC60A19D1527K | LED 8W Dimmable A19 - 2700K Clear Pro | 120 | 8 | 60W | 725 | 90.6 | - | - | 2700K | 80 | E26 | 12 |
|----------------|---------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|

#### NON DIMMABLE 8W ALL GLASS A19 – PROLINE

|                |                                             |     |   |     |     |      |   |   |       |    |     |    |
|----------------|---------------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|
| LFF60A19N1527K | LED 8W Non Dimmable A19 - 2700K Frosted Pro | 120 | 8 | 60W | 725 | 90.6 | - | - | 2700K | 80 | E26 | 12 |
|----------------|---------------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|

|                |                                             |     |   |     |     |      |   |   |       |    |     |    |
|----------------|---------------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|
| LFF60A19N1550K | LED 8W Non Dimmable A19 - 5000K Frosted Pro | 120 | 8 | 60W | 725 | 90.6 | - | - | 5000K | 80 | E26 | 12 |
|----------------|---------------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|

|                |                                           |     |   |     |     |      |   |   |       |    |     |    |
|----------------|-------------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|
| LFC60A19N1527K | LED 8W Non Dimmable A19 - 2700K Clear Pro | 120 | 8 | 60W | 725 | 90.6 | - | - | 2700K | 80 | E26 | 12 |
|----------------|-------------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|

|                |                                           |     |   |     |     |      |   |   |       |    |     |    |
|----------------|-------------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|
| LFC60A19N1550K | LED 8W Non Dimmable A19 - 5000K Clear Pro | 120 | 8 | 60W | 725 | 90.6 | - | - | 5000K | 80 | E26 | 12 |
|----------------|-------------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|

#### DIMMABLE 4.5W ALL GLASS A19 – PROLINE

|                |                                           |     |     |     |     |      |   |   |       |    |     |    |
|----------------|-------------------------------------------|-----|-----|-----|-----|------|---|---|-------|----|-----|----|
| LFF40A19D1527K | LED 4.5W Dimmable A19 - 2700K Frosted Pro | 120 | 4.5 | 40W | 425 | 94.4 | - | - | 2700K | 80 | E26 | 12 |
|----------------|-------------------------------------------|-----|-----|-----|-----|------|---|---|-------|----|-----|----|

|                |                                         |     |     |     |     |      |   |   |       |    |     |    |
|----------------|-----------------------------------------|-----|-----|-----|-----|------|---|---|-------|----|-----|----|
| LFC40A19D1527K | LED 4.5W Dimmable A19 - 2700K Clear Pro | 120 | 4.5 | 40W | 425 | 94.4 | - | - | 2700K | 80 | E26 | 12 |
|----------------|-----------------------------------------|-----|-----|-----|-----|------|---|---|-------|----|-----|----|

#### NON DIMMABLE 5W ALL GLASS A19 – PROLINE

|                |                                               |     |   |     |     |      |   |   |       |    |     |    |
|----------------|-----------------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|
| LFF40A19N1527K | LED 4.5W Non Dimmable A19 - 2700K Frosted Pro | 120 | 5 | 40W | 425 | 94.4 | - | - | 2700K | 80 | E26 | 12 |
|----------------|-----------------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|

|                |                                               |     |   |     |     |      |   |   |       |    |     |    |
|----------------|-----------------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|
| LFF40A19N1550K | LED 4.5W Non Dimmable A19 - 5000K Frosted Pro | 120 | 5 | 40W | 425 | 94.4 | - | - | 5000K | 80 | E26 | 12 |
|----------------|-----------------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|

|                |                                             |     |   |     |     |      |   |   |       |    |     |    |
|----------------|---------------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|
| LFC40A19N1527K | LED 4.5W Non Dimmable A19 - 2700K Clear Pro | 120 | 5 | 40W | 425 | 94.4 | - | - | 2700K | 80 | E26 | 12 |
|----------------|---------------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|

|                |                                             |     |   |     |     |      |   |   |       |    |     |    |
|----------------|---------------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|
| LFC40A19N1550K | LED 4.5W Non Dimmable A19 - 5000K Clear Pro | 120 | 5 | 40W | 425 | 94.4 | - | - | 5000K | 80 | E26 | 12 |
|----------------|---------------------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|

### 15,000 HOUR PRO LINE A-LAMPS

#### 15W A19 PROLINE DIMMABLE A-LAMP (REPLACES 100W)

|                |                              |     |    |      |      |     |   |   |       |    |     |    |
|----------------|------------------------------|-----|----|------|------|-----|---|---|-------|----|-----|----|
| L100A19D15V27K | Dimmable 15W A19 - 2700K Pro | 120 | 15 | 100W | 1500 | 100 | - | - | 2700K | 80 | E26 | 12 |
|----------------|------------------------------|-----|----|------|------|-----|---|---|-------|----|-----|----|

#### 14W A19 PROLINE NON DIMMABLE A-LAMP (REPLACES 100W)

|                |                                  |     |    |      |      |       |   |   |       |    |     |    |
|----------------|----------------------------------|-----|----|------|------|-------|---|---|-------|----|-----|----|
| L100A19N15V27K | Non Dimmable 15W A19 - 2700K Pro | 120 | 14 | 100W | 1500 | 107.1 | - | - | 2700K | 80 | E26 | 12 |
|----------------|----------------------------------|-----|----|------|------|-------|---|---|-------|----|-----|----|

#### 9W A19 PROLINE DIMMABLE A-LAMP (REPLACES 60W)

|               |                             |     |   |     |     |      |   |   |       |    |     |    |
|---------------|-----------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|
| L60A19D15V27K | Dimmable 9W A19 - 2700K Pro | 120 | 9 | 60W | 800 | 88.9 | - | - | 2700K | 80 | E26 | 12 |
|---------------|-----------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|

#### 9W A19 PROLINE NON DIMMABLE A-LAMP (REPLACES 60W)

|               |                                 |     |   |     |     |      |   |   |       |    |     |    |
|---------------|---------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|
| L60A19N15V27K | Non Dimmable 9W A19 - 2700K Pro | 120 | 9 | 60W | 800 | 88.9 | - | - | 2700K | 80 | E26 | 12 |
|---------------|---------------------------------|-----|---|-----|-----|------|---|---|-------|----|-----|----|



## 50,000 HOUR DIMMABLE LED PL TYPE A LAMPS

### 9W DIMMABLE VERTICAL BR30 PL LAMP



| Item Number | Item Description                     | Voltage        | Lamp Watts | Avg. System Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CCT   | CRI | Base Type    | Case Quantity |
|-------------|--------------------------------------|----------------|------------|-------------------|--------------------|--------|-----------------|-------|-----|--------------|---------------|
| L9PLVD5027K | 9W Dimmable Vertical BR30 PL - 2700K | 120-277v, 347v | 9          | 13.1              | 13-18              | 1050   | 116.7           | 2700K | 80  | G24q / GX24q | 12            |
| L9PLVD5030K | 9W Dimmable Vertical BR30 PL - 3000K | 120-277v, 347v | 9          | 13.1              | 13-18              | 1100   | 122.2           | 3000K | 80  | G24q / GX24q | 12            |
| L9PLVD5041K | 9W Dimmable Vertical BR30 PL - 4100K | 120-277v, 347v | 9          | 13.1              | 13-18              | 1150   | 127.8           | 4100K | 80  | G24q / GX24q | 12            |
| L9PLVD5050K | 9W Dimmable Vertical BR30 PL - 5000K | 120-277v, 347v | 9          | 13.1              | 13-18              | 1175   | 130.6           | 5000K | 80  | G24q / GX24q | 12            |

### 17W DIMMABLE VERTICAL BR30 PL LAMP



|              |                                       |                |    |      |    |      |       |       |    |              |    |
|--------------|---------------------------------------|----------------|----|------|----|------|-------|-------|----|--------------|----|
| L17PLVD5027K | 17W Dimmable Vertical BR30 PL - 2700K | 120-277v, 347v | 17 | 21.4 | 26 | 1700 | 100.0 | 2700K | 80 | G24q / GX24q | 12 |
| L17PLVD5030K | 17W Dimmable Vertical BR30 PL - 3000K | 120-277v, 347v | 17 | 21.4 | 26 | 1800 | 105.8 | 3000K | 80 | G24q / GX24q | 12 |
| L17PLVD5041K | 17W Dimmable Vertical BR30 PL - 4100K | 120-277v, 347v | 17 | 21.4 | 26 | 1900 | 111.7 | 4100K | 80 | G24q / GX24q | 12 |
| L17PLVD5050K | 17W Dimmable Vertical BR30 PL - 5000K | 120-277v, 347v | 17 | 21.4 | 26 | 1950 | 114.7 | 5000K | 80 | G24q / GX24q | 12 |

### 19W DIMMABLE VERTICAL BR40 PL LAMP



|              |                                       |                |    |      |       |      |       |       |    |              |    |
|--------------|---------------------------------------|----------------|----|------|-------|------|-------|-------|----|--------------|----|
| L19PLVD5027K | 19W Dimmable Vertical BR40 PL - 2700K | 120-277v, 347v | 19 | 25.6 | 26-42 | 2350 | 123.7 | 2700K | 80 | G24q / GX24q | 12 |
| L19PLVD5030K | 19W Dimmable Vertical BR40 PL - 4000K | 120-277v, 347v | 19 | 25.6 | 26-42 | 2400 | 126.3 | 3000K | 80 | G24q / GX24q | 12 |
| L19PLVD5041K | 19W Dimmable Vertical BR40 PL - 4100K | 120-277v, 347v | 19 | 25.6 | 26-42 | 2450 | 128.9 | 4100K | 80 | G24q / GX24q | 12 |
| L19PLVD5050K | 19W Dimmable Vertical BR40 PL - 5000K | 120-277v, 347v | 19 | 25.6 | 26-42 | 2480 | 130.5 | 5000K | 80 | G24q / GX24q | 12 |

| Item Number                                     | Item Description                           | Voltage  | Lamp Watts | Avg. System Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CCT   | CRI | Base Type    | Case Quantity |
|-------------------------------------------------|--------------------------------------------|----------|------------|-------------------|--------------------|--------|-----------------|-------|-----|--------------|---------------|
| <b>20,000 HOUR NON DIMMABLE LED PL LAMPS</b>    |                                            |          |            |                   |                    |        |                 |       |     |              |               |
| <b>11W Non DIMMABLE QUAD PL LAMP</b>            |                                            |          |            |                   |                    |        |                 |       |     |              |               |
| LPL226A2527K                                    | 11W Non Dimmable Universal Quad PL - 2700K | 120-277V | 11         | 13.7              | 13-18-26           | 950    | 86.4            | 2700K | 80  | G24q / GX24q | 12            |
| LPL226A2530K                                    | 11W Non Dimmable Universal Quad PL - 3000K | 120-277V | 11         | 13.7              | 13-18-26           | 950    | 86.4            | 3000K | 80  | G24q / GX24q | 12            |
| LPL226A2535K                                    | 11W Non Dimmable Universal Quad PL - 3500K | 120-277V | 11         | 13.7              | 13-18-26           | 950    | 86.4            | 3500K | 80  | G24q / GX24q | 12            |
| LPL226A2541K                                    | 11W Non Dimmable Universal Quad PL - 4100K | 120-277V | 11         | 13.7              | 13-18-26           | 950    | 86.4            | 4100K | 80  | G24q / GX24q | 12            |
| LPL226A2550K                                    | 11W Non Dimmable Universal Quad PL - 5000K | 120-277V | 11         | 13.7              | 13-18-26           | 950    | 86.4            | 5000K | 80  | G24q / GX24q | 12            |
| <b>20,000 HOUR NON DIMMABLE LED PL 3U LAMPS</b> |                                            |          |            |                   |                    |        |                 |       |     |              |               |
| <b>15W Non DIMMABLE PL 3U LAMP</b>              |                                            |          |            |                   |                    |        |                 |       |     |              |               |
| LPLU26A2527K                                    | 15W Non Dimmable Universal 3U PL - 2700K   | 120-277V | 15         | —                 | 18-26              | 1350   | 90              | 2700K | 80  | G24q / GX24q | 12            |
| LPLU26A2530K                                    | 15W Non Dimmable Universal 3U PL - 3000K   | 120-277V | 15         | —                 | 18-26              | 1350   | 90              | 3000K | 80  | G24q / GX24q | 12            |
| LPLU26A2535K                                    | 15W Non Dimmable Universal 3U PL - 3500K   | 120-277V | 15         | —                 | 18-26              | 1350   | 90              | 3500K | 80  | G24q / GX24q | 12            |
| LPLU26A2541K                                    | 15W Non Dimmable Universal 3U PL - 4100K   | 120-277V | 15         | —                 | 18-26              | 1350   | 90              | 4100K | 80  | G24q / GX24q | 12            |
| LPLU26A2550K                                    | 15W Non Dimmable Universal 3U PL - 5000K   | 120-277V | 15         | —                 | 18-26              | 1350   | 90              | 5000K | 80  | G24q / GX24q | 12            |
| <b>16W Non DIMMABLE PL 3U LAMP</b>              |                                            |          |            |                   |                    |        |                 |       |     |              |               |
| LPLU42A2527K                                    | 16W Non Dimmable Universal 3U PL - 2700K   | 120-277V | 16         | —                 | 32-42              | 1500   | 93.8            | 2700K | 80  | G24q / GX24q | 12            |
| LPLU42A2530K                                    | 16W Non Dimmable Universal 3U PL - 3000K   | 120-277V | 16         | —                 | 32-42              | 1500   | 93.8            | 3000K | 80  | G24q / GX24q | 12            |
| LPLU42A2535K                                    | 16W Non Dimmable Universal 3U PL - 3500K   | 120-277V | 16         | —                 | 32-42              | 1500   | 93.8            | 3500K | 80  | G24q / GX24q | 12            |
| LPLU42A2541K                                    | 16W Non Dimmable Universal 3U PL - 4100K   | 120-277V | 16         | —                 | 32-42              | 1500   | 93.8            | 4100K | 80  | G24q / GX24q | 12            |
| LPLU42A2550K                                    | 16W Non Dimmable Universal 3U PL - 5000K   | 120-277V | 16         | —                 | 32-42              | 1500   | 93.8            | 5000K | 80  | G24q / GX24q | 12            |





| Item Number | Item Description | Voltage | Lamp Watts | Avg. System Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CCT | CRI | Base Type | Case Quantity |
|-------------|------------------|---------|------------|-------------------|--------------------|--------|-----------------|-----|-----|-----------|---------------|
|-------------|------------------|---------|------------|-------------------|--------------------|--------|-----------------|-----|-----|-----------|---------------|

## 50,000 HOUR NON DIMMABLE LED PLL LAMPS

### 17W Non DIMMABLE PLL LAMP



|               |                              |          |    |   |    |      |      |       |    |      |    |
|---------------|------------------------------|----------|----|---|----|------|------|-------|----|------|----|
| LPLLU40A5027K | 17W Non Dimmable PLL - 2700K | 120-277V | 17 | - | 40 | 2000 | 90.5 | 2700K | 80 | 2G11 | 12 |
| LPLLU40A5030K | 17W Non Dimmable PLL - 3000K | 120-277V | 17 | - | 40 | 2000 | 90.5 | 3000K | 80 | 2G11 | 12 |
| LPLLU40A5035K | 17W Non Dimmable PLL - 3500K | 120-277V | 17 | - | 40 | 2000 | 90.5 | 3500K | 80 | 2G11 | 12 |
| LPLLU40A5041K | 17W Non Dimmable PLL - 4100K | 120-277V | 17 | - | 40 | 2100 | 90.5 | 4100K | 80 | 2G11 | 12 |
| LPLLU40A5050K | 17W Non Dimmable PLL - 5000K | 120-277V | 17 | - | 40 | 2150 | 90.5 | 5000K | 80 | 2G11 | 12 |

## 50,000 HOUR DIMMABLE LED ROTATING HORIZONTAL SHAPE LAMPS

### 19W DIMMABLE ROTATING HORIZONTAL PL LAMP



|              |                                             |          |    |   |       |      |       |       |    |              |    |
|--------------|---------------------------------------------|----------|----|---|-------|------|-------|-------|----|--------------|----|
| LPLH42A5027K | 19W Dimmable Rotating Horizontal PL - 2700K | 120-277V | 19 | - | 32-42 | 1900 | 100   | 2700K | 80 | G24q / GX24q | 12 |
| LPLH42A5030K | 19W Dimmable Rotating Horizontal PL - 3000K | 120-277V | 19 | - | 32-42 | 2000 | 105.3 | 3000K | 80 | G24q / GX24q | 12 |
| LPLH42A5035K | 19W Dimmable Rotating Horizontal PL - 3500K | 120-277V | 19 | - | 32-42 | 2000 | 105.3 | 3500K | 80 | G24q / GX24q | 12 |
| LPLH42A5041K | 19W Dimmable Rotating Horizontal PL - 4100K | 120-277V | 19 | - | 32-42 | 2000 | 105.3 | 4100K | 80 | G24q / GX24q | 12 |
| LPLH42A5050K | 19W Dimmable Rotating Horizontal PL - 5000K | 120-277V | 19 | - | 32-42 | 2000 | 105.3 | 5000K | 80 | G24q / GX24q | 12 |

## 25,000 HOUR NON-DIMMABLE LED PL TYPE B LAMPS

### 5W Non DIMMABLE PL 1U LAMP



|              |                 |         |   |   |       |     |     |       |    |      |    |
|--------------|-----------------|---------|---|---|-------|-----|-----|-------|----|------|----|
| LPLU09B2527K | LED 5W 1U B 27K | 120-277 | 5 | - | 5-7-9 | 500 | 100 | 2700K | 80 | GX23 | 12 |
| LPLU09B2530K | LED 5W 1U B 30K | 120-277 | 5 | - | 5-7-9 | 550 | 110 | 3000K | 80 | GX23 | 12 |
| LPLU09B2535K | LED 5W 1U B 35K | 120-277 | 5 | - | 5-7-9 | 550 | 110 | 3500K | 80 | GX23 | 12 |
| LPLU09B2541K | LED 5W 1U B 41K | 120-277 | 5 | - | 5-7-9 | 550 | 110 | 4100K | 80 | GX23 | 12 |
| LPLU09B2550K | LED 5W 1U B 50K | 120-277 | 5 | - | 5-7-9 | 550 | 110 | 5000K | 80 | GX23 | 12 |

### 7W Non DIMMABLE PL 1U LAMP

|              |                 |         |   |   |      |     |       |       |    |      |    |
|--------------|-----------------|---------|---|---|------|-----|-------|-------|----|------|----|
| LPLU13B2527K | LED 7W 1U B 27K | 120-277 | 7 | - | 9-13 | 700 | 100   | 2700K | 80 | GX23 | 12 |
| LPLU13B2530K | LED 7W 1U B 30K | 120-277 | 7 | - | 9-13 | 750 | 107.1 | 3000K | 80 | GX23 | 12 |
| LPLU13B2535K | LED 7W 1U B 35K | 120-277 | 7 | - | 9-13 | 750 | 107.1 | 3500K | 80 | GX23 | 12 |
| LPLU13B2541K | LED 7W 1U B 41K | 120-277 | 7 | - | 9-13 | 750 | 107.1 | 4100K | 80 | GX23 | 12 |
| LPLU13B2550K | LED 7W 1U B 50K | 120-277 | 7 | - | 9-13 | 750 | 107.1 | 5000K | 80 | GX23 | 12 |

## 20,000 HOUR NON DIMMABLE LED PL 2U LAMPS

### 10W Non DIMMABLE PL 2U LAMP



|              |                                          |          |   |   |          |      |       |       |    |                              |    |
|--------------|------------------------------------------|----------|---|---|----------|------|-------|-------|----|------------------------------|----|
| LPL218B2527K | 10W Non Dimmable Universal 2U PL - 2700K | 120-277V | 8 | - | 13-18-26 | 975  | 121.9 | 2700K | 80 | G24d / GX24d<br>G24q / GX24q | 12 |
| LPL218B2530K | 10W Non Dimmable Universal 2U PL - 3000K | 120-277V | 8 | - | 13-18-26 | 1000 | 125   | 3000K | 80 | G24d / GX24d<br>G24q / GX24q | 12 |
| LPL218B2535K | 10W Non Dimmable Universal 2U PL - 3500K | 120-277V | 8 | - | 13-18-26 | 1025 | 128.1 | 3500K | 80 | G24d / GX24d<br>G24q / GX24q | 12 |
| LPL218B2541K | 10W Non Dimmable Universal 2U PL - 4100K | 120-277V | 8 | - | 13-18-26 | 1050 | 131.3 | 4100K | 80 | G24d / GX24d<br>G24q / GX24q | 12 |
| LPL218B2550K | 10W Non Dimmable Universal 2U PL - 5000K | 120-277V | 8 | - | 13-18-26 | 1050 | 131.3 | 5000K | 80 | G24d / GX24d<br>G24q / GX24q | 12 |

| Item Number                                                       | Item Description                         | Voltage  | Lamp Watts    | Avg. System Watts | Wattage Equivalent | Lumens            | Lumens Per Watt   | CCT   | CRI | Base Type                    | Case Quantity |
|-------------------------------------------------------------------|------------------------------------------|----------|---------------|-------------------|--------------------|-------------------|-------------------|-------|-----|------------------------------|---------------|
| <b>25,000 HOUR NON-DIMMABLE LED PL TYPE B LAMPS</b>               |                                          |          |               |                   |                    |                   |                   |       |     |                              |               |
| <b>13W Non Dimmable PL 3U Lamp</b>                                |                                          |          |               |                   |                    |                   |                   |       |     |                              |               |
| LPLU42B2527K                                                      | LED 13W 3U B 27K                         | 120-277  | 13            | -                 | 32-42              | 1400              | 107.7             | 2700K | 80  | G24d / GX24d<br>G24q / GX24q | 12            |
| LPLU42B2530K                                                      | LED 13W 3U B 30K                         | 120-277  | 13            | -                 | 32-42              | 1500              | 115.4             | 3000K | 80  | G24d / GX24d<br>G24q / GX24q | 12            |
| LPLU42B2535K                                                      | LED 13W 3U B 35K                         | 120-277  | 13            | -                 | 32-42              | 1500              | 115.4             | 3500K | 80  | G24d / GX24d<br>G24q / GX24q | 12            |
| LPLU42B2541K                                                      | LED 13W 3U B 41K                         | 120-277  | 13            | -                 | 32-42              | 1600              | 123.1             | 4100K | 80  | G24d / GX24d<br>G24q / GX24q | 12            |
| LPLU42B2550K                                                      | LED 13W 3U B 50K                         | 120-277  | 13            | -                 | 32-42              | 1600              | 123.1             | 5000K | 80  | G24d / GX24d<br>G24q / GX24q | 12            |
| <b>9W Non Dimmable Horizontal PL Lamp</b>                         |                                          |          |               |                   |                    |                   |                   |       |     |                              |               |
| LPLH26B5027K                                                      | LED 9W Horizontal B 27K                  | 120-277  | 9             | -                 | 18-26              | 1100              | 122.2             | 2700K | 80  | G24d / GX24d<br>G24q / GX24q | 12            |
| LPLH26B5030K                                                      | LED 9W Horizontal B 30K                  | 120-277  | 9             | -                 | 18-26              | 1100              | 122.2             | 3000K | 80  | G24d / GX24d<br>G24q / GX24q | 12            |
| LPLH26B5035K                                                      | LED 9W Horizontal B 35K                  | 120-277  | 9             | -                 | 18-26              | 1100              | 122.2             | 3500K | 80  | G24d / GX24d<br>G24q / GX24q | 12            |
| LPLH26B5041K                                                      | LED 9W Horizontal B 41K                  | 120-277  | 9             | -                 | 18-26              | 1100              | 122.2             | 4100K | 80  | G24d / GX24d<br>G24q / GX24q | 12            |
| LPLH26B5050K                                                      | LED 9W Horizontal B 50K                  | 120-277  | 9             | -                 | 18-26              | 1100              | 122.2             | 5000K | 80  | G24d / GX24d<br>G24q / GX24q | 12            |
| <b>9W Non Dimmable Vertical BR30 PL Lamp</b>                      |                                          |          |               |                   |                    |                   |                   |       |     |                              |               |
| LPLV26B5027K                                                      | LED 9W Vertical BR30 B 27K               | 120-277  | 9             | -                 | 18-26              | 1100              | 122.2             | 2700K | 80  | G24d / GX24d<br>G24q / GX24q | 12            |
| LPLV26B5030K                                                      | LED 9W Vertical BR30 B 30K               | 120-277  | 9             | -                 | 18-26              | 1100              | 122.2             | 3000K | 80  | G24d / GX24d<br>G24q / GX24q | 12            |
| LPLV26B5035K                                                      | LED 9W Vertical BR30 B 35K               | 120-277  | 9             | -                 | 18-26              | 1100              | 122.2             | 3500K | 80  | G24d / GX24d<br>G24q / GX24q | 12            |
| LPLV26B5041K                                                      | LED 9W Vertical BR30 B 41K               | 120-277  | 9             | -                 | 18-26              | 1100              | 122.2             | 4100K | 80  | G24d / GX24d<br>G24q / GX24q | 12            |
| LPLV26B5050K                                                      | LED 9W Vertical BR30 B 50K               | 120-277  | 9             | -                 | 18-26              | 1100              | 122.2             | 5000K | 80  | G24d / GX24d<br>G24q / GX24q | 12            |
| <b>17.5W Non Dimmable PLL Type B Lamp</b>                         |                                          |          |               |                   |                    |                   |                   |       |     |                              |               |
| LPLLU40B5027K                                                     | 17W Non Dimmable PLL40 B - 2700K         | 120-277V | 17.5          | -                 | 40                 | 2050              | 117.1             | 2700K | 80  | 2G11                         | 12            |
| LPLLU40B5030K                                                     | 17W Non Dimmable PLL40 B - 3000K         | 120-277V | 17.5          | -                 | 40                 | 2050              | 117.1             | 3000K | 80  | 2G11                         | 12            |
| LPLLU40B5035K                                                     | 17W Non Dimmable PLL40 B - 3500K         | 120-277V | 17.5          | -                 | 40                 | 2000              | 114.3             | 3500K | 80  | 2G11                         | 12            |
| LPLLU40B5041K                                                     | 17W Non Dimmable PLL40 B - 4100K         | 120-277V | 17.5          | -                 | 40                 | 2100              | 120               | 4100K | 80  | 2G11                         | 12            |
| LPLLU40B5050K                                                     | 17W Non Dimmable PLL40 B - 5000K         | 120-277V | 17.5          | -                 | 40                 | 2150              | 122.9             | 5000K | 80  | 2G11                         | 12            |
| <b>50,000 HOUR DIMMABLE LED ADJUSTABLE SHAPE PL TYPE AB LAMPS</b> |                                          |          |               |                   |                    |                   |                   |       |     |                              |               |
| <b>21W Dimmable Adjustable Shape PL Type AB Lamp</b>              |                                          |          |               |                   |                    |                   |                   |       |     |                              |               |
| LAPL42AB5027K                                                     | 21W Dimmable Adjustable Shape PL - 2700K | 120v     | A=21,<br>B=19 | -                 | 32-42              | A=1800,<br>B=2100 | A=56.3,<br>B=50   | 2700K | 80  | G24q / GX24q                 | 12            |
| LAPL42AB5030K                                                     | 21W Dimmable Adjustable Shape PL - 3000K | 120v     | A=21,<br>B=19 | -                 | 32-42              | A=1900,<br>B=2200 | A=59.4,<br>B=52.4 | 3000K | 80  | G24q / GX24q                 | 12            |
| LAPL42AB5035K                                                     | 21W Dimmable Adjustable Shape PL - 3500K | 120v     | A=21,<br>B=19 | -                 | 32-42              | A=1925,<br>B=2200 | A=60.2,<br>B=52.4 | 3500K | 80  | G24q / GX24q                 | 12            |
| LAPL42AB5041K                                                     | 21W Dimmable Adjustable Shape PL - 4100K | 120v     | A=21,<br>B=19 | -                 | 32-42              | A=1925,<br>B=2200 | A=60.2,<br>B=52.4 | 4100K | 80  | G24q / GX24q                 | 12            |
| LAPL42AB5050K                                                     | 21W Dimmable Adjustable Shape PL - 5000K | 120v     | A=21,<br>B=19 | -                 | 32-42              | A=1925,<br>B=2200 | A=60.2,<br>B=52.4 | 5000K | 80  | G24q / GX24q                 | 12            |



| Item Number | Item Description | Voltage | Lamp Watts | Avg. System Watts | Wattage Equivalent | Lumens | Lumens Per Watt | CCT | CRI | Base Type | Case Quantity |
|-------------|------------------|---------|------------|-------------------|--------------------|--------|-----------------|-----|-----|-----------|---------------|
|-------------|------------------|---------|------------|-------------------|--------------------|--------|-----------------|-----|-----|-----------|---------------|

## 25,000 HOUR NON-DIMMABLE LED PL LAMPS GU24 BASE

### 11W NON DIMMABLE PL GU24 BASE LAMP



|               |                                        |      |    |   |    |      |       |       |    |      |    |
|---------------|----------------------------------------|------|----|---|----|------|-------|-------|----|------|----|
| LPL75GUD2527K | 11W Non Dimmable GU24 Based PL - 2700K | 120v | 11 | - | 75 | 1100 | 100   | 2700K | 80 | GU24 | 12 |
| LPL75GUD2530K | 11W Non Dimmable GU24 Based PL - 3000K | 120v | 11 | - | 75 | 1150 | 104.5 | 3000K | 80 | GU24 | 12 |
| LPL75GUD2535K | 11W Non Dimmable GU24 Based PL - 3500K | 120v | 11 | - | 75 | 1200 | 109.1 | 3500K | 80 | GU24 | 12 |
| LPL75GUD2541K | 11W Non Dimmable GU24 Based PL - 4100K | 120v | 11 | - | 75 | 1200 | 109.1 | 4100K | 80 | GU24 | 12 |
| LPL75GUD2550K | 11W Non Dimmable GU24 Based PL - 5000K | 120v | 11 | - | 75 | 1200 | 109.1 | 5000K | 80 | GU24 | 12 |

### 13W NON DIMMABLE PL GU24 BASE LAMP



|                |                                        |      |    |   |     |      |       |       |    |      |    |
|----------------|----------------------------------------|------|----|---|-----|------|-------|-------|----|------|----|
| LPL100GUD2527K | 13W Non Dimmable GU24 Based PL - 2700K | 120v | 13 | - | 100 | 1450 | 111.5 | 2700K | 80 | GU24 | 12 |
| LPL100GUD2530K | 13W Non Dimmable GU24 Based PL - 3000K | 120v | 13 | - | 100 | 1500 | 115.4 | 3000K | 80 | GU24 | 12 |
| LPL100GUD2535K | 13W Non Dimmable GU24 Based PL - 3500K | 120v | 13 | - | 100 | 1500 | 115.4 | 3500K | 80 | GU24 | 12 |
| LPL100GUD2541K | 13W Non Dimmable GU24 Based PL - 4100K | 120v | 13 | - | 100 | 1550 | 119.2 | 4100K | 80 | GU24 | 12 |
| LPL100GUD2550K | 13W Non Dimmable GU24 Based PL - 5000K | 120v | 13 | - | 100 | 1600 | 123.1 | 5000K | 80 | GU24 | 12 |

| Item Number                                   | Item Description                          | Voltage | Lamp Watts | Wattage Equivalent | Lumens | LPW | CCT   | CRI | Base  | Case Quantity |                                                                                       |
|-----------------------------------------------|-------------------------------------------|---------|------------|--------------------|--------|-----|-------|-----|-------|---------------|---------------------------------------------------------------------------------------|
| 25,000 HOUR DIMMABLE LED Accent Lights        |                                           |         |            |                    |        |     |       |     |       |               |                                                                                       |
| DIMMABLE 2W CLEAR G9 Accent Light             |                                           |         |            |                    |        |     |       |     |       |               |                                                                                       |
| L2G9D2527K                                    | LED Dimmable 2.5W Clear G9 - 2700K        | 120     | 2.5        | 15W                | 200    | 80  | 2700K | 90  | G9    | 20            |    |
| L2G9D2530K                                    | LED Dimmable 2.5W Clear G9 - 3000K        | 120     | 2.5        | 15W                | 200    | 80  | 3000K | 90  | G9    | 20            |                                                                                       |
| DIMMABLE 3W CLEAR G9 Accent Light             |                                           |         |            |                    |        |     |       |     |       |               |                                                                                       |
| L3G9D2527K                                    | LED Dimmable 3W Clear G9 - 2700K          | 120     | 3          | 25W                | 240    | 80  | 2700K | 90  | G9    | 20            |    |
| L3G9D2530K                                    | LED Dimmable 3W Clear G9 - 3000K          | 120     | 3          | 25W                | 240    | 80  | 3000K | 90  | G9    | 20            |                                                                                       |
| DIMMABLE 4W CLEAR G9 Accent Light             |                                           |         |            |                    |        |     |       |     |       |               |                                                                                       |
| L4G9D2527K                                    | LED Dimmable 4W Clear G9 - 2700K          | 120     | 4          | 30W                | 360    | 80  | 2700K | 90  | G9    | 20            |    |
| L4G9D2530K                                    | LED Dimmable 4W Clear G9 - 3000K          | 120     | 4          | 30W                | 360    | 80  | 3000K | 90  | G9    | 20            |                                                                                       |
| DIMMABLE 5W CLEAR G9 Accent Light             |                                           |         |            |                    |        |     |       |     |       |               |                                                                                       |
| L5G9D2527K                                    | LED Dimmable 5W Clear G9 - 2700K          | 120     | 5          | 35W                | 400    | 80  | 2700K | 90  | G9    | 20            |   |
| L5G9D2530K                                    | LED Dimmable 5W Clear G9 - 3000K          | 120     | 5          | 35W                | 400    | 80  | 3000K | 90  | G9    | 20            |                                                                                       |
| DIMMABLE 3W FROSTED G9 Accent Light           |                                           |         |            |                    |        |     |       |     |       |               |                                                                                       |
| L3E12D2527KF                                  | LED Dimmable 3W Frosted E12 - 2700K       | 120     | 3          | 25W                | 270    | 90  | 2700K | 90  | E12   | 20            |  |
| 25,000 HOUR DIMMABLE LED Accent Lights        |                                           |         |            |                    |        |     |       |     |       |               |                                                                                       |
| NON DIMMABLE 1.5W G4 BASE                     |                                           |         |            |                    |        |     |       |     |       |               |                                                                                       |
| L1T3N1030K2                                   | Non Dimmable 1.5W G4 - 3000K - 2 Pack     | 12      | 1.5        | 10W                | 120    | 80  | 3000K | 80  | G4    | 25            |  |
| 25,000 HOUR LED ELEVATOR LAMPS (NON-DIMMABLE) |                                           |         |            |                    |        |     |       |     |       |               |                                                                                       |
| LED2W1383V2                                   | LED 2W 1383 Frosted Elevator Lamp - 2700K | 12      | 2          | 20W                | 150    | 75  | 2700K | 80  | BA15S | 12            |  |
| LED2WGBFV2                                    | LED 2W GBF Frosted Elevator Lamp - 2700K  | 12      | 2          | 20W                | 150    | 75  | 2700K | 80  | BA15D | 12            |  |



# STARLIGHT SERIES LAMPS

No matter what application you need – commercial, residential, retail or industrial – TCP's Starlight LED Lamps – give you a unique shape and sleek low profile, combined with a pop of unexpected color, and smooth, warm dimming.

Our Starlight line-up comes in red, black, green, blue and white, with matching pendant mounts available. They are available in a six-inch adjustable length, which mounts directly to a junction box.

| Item Number                                   | Item Description          | Voltage | Lamp Watts | Wattage Equivalent | Lamp Lumens | LPW   | Color Temperature | CRI | Beam Angle | Base | Case Quantity |
|-----------------------------------------------|---------------------------|---------|------------|--------------------|-------------|-------|-------------------|-----|------------|------|---------------|
| <b>30,000 HOUR STARLIGHT SERIES LED LAMPS</b> |                           |         |            |                    |             |       |                   |     |            |      |               |
| <b>9W SL13 STARLIGHT, 65W EQUIVALENT</b>      |                           |         |            |                    |             |       |                   |     |            |      |               |
| L9SL13D3030K                                  | LED 9W Dimmable - 30K     | 120V    | 9          | 65                 | 950         | 105.6 | 3000              | 80  | 110°       | E26  | 12            |
| L9SL13D3040K                                  | LED 9W Dimmable - 40K     | 120V    | 9          | 65                 | 1000        | 111.1 | 4000              | 80  | 110°       | E26  | 12            |
| L9SL13D3050K                                  | LED 9W Dimmable - 50K     | 120V    | 9          | 65                 | 1000        | 111.1 | 5000              | 80  | 110°       | E26  | 12            |
| <b>15W SL16 STARLIGHT, 100W EQUIVALENT</b>    |                           |         |            |                    |             |       |                   |     |            |      |               |
| L15SL16D3030K                                 | LED 15W Dimmable - 30K    | 120V    | 15         | 100                | 1625        | 108.3 | 3000              | 80  | 110°       | E26  | 12            |
| L15SL16D3040K                                 | LED 15W Dimmable - 40K    | 120V    | 15         | 100                | 1625        | 108.3 | 4000              | 80  | 110°       | E26  | 12            |
| L15SL16D3050K                                 | LED 15W Dimmable - 50K    | 120V    | 15         | 100                | 1625        | 108.3 | 5000              | 80  | 110°       | E26  | 12            |
| <b>19W SL19 STARLIGHT, 140W EQUIVALENT</b>    |                           |         |            |                    |             |       |                   |     |            |      |               |
| L19SL19D3030K                                 | LED 19W Dimmable - 30K    | 120V    | 19         | 140                | 2100        | 110.5 | 3000              | 80  | 110°       | E26  | 12            |
| L19SL19D3040K                                 | LED 19W Dimmable - 40K    | 120V    | 19         | 140                | 2250        | 118.4 | 4000              | 80  | 110°       | E26  | 12            |
| L19SL19D3050K                                 | LED 19W Dimmable - 50K    | 120V    | 19         | 140                | 2250        | 118.4 | 5000              | 80  | 110°       | E26  | 12            |
| <b>22W SL22 STARLIGHT, 140W EQUIVALENT</b>    |                           |         |            |                    |             |       |                   |     |            |      |               |
| L22SL22D3030K                                 | LED 22W Dimmable - 30K    | 120V    | 22         | 160                | 2350        | 106.8 | 3000              | 80  | 110°       | E26  | 12            |
| L22SL22D3040K                                 | LED 22W Dimmable - 40K    | 120V    | 22         | 160                | 2450        | 111.4 | 4000              | 80  | 110°       | E26  | 12            |
| L22SL22D3050K                                 | LED 22W Dimmable - 50K    | 120V    | 22         | 160                | 2450        | 111.4 | 5000              | 80  | 110°       | E26  | 12            |
| <b>25W SL122 STARLIGHT, 200W EQUIVALENT</b>   |                           |         |            |                    |             |       |                   |     |            |      |               |
| L25SL22HD3030K                                | LED 25W Dimmable - 30K HL | 120V    | 25         | 200                | 3100        | 124   | 3000              | 80  | 110°       | E26  | 12            |
| L25SL22HD3040K                                | LED 25W Dimmable - 40K HL | 120V    | 25         | 200                | 3100        | 124   | 4000              | 80  | 110°       | E26  | 12            |

Black, silver and custom colors are available by special order. All models are available in the following colors. To order, add the color code to the end of the model number (i.e., L15SL16D3030KRED)

|            |       |
|------------|-------|
| <b>B</b>   | Black |
| <b>RED</b> | Red   |
| <b>GRN</b> | Green |
| <b>BLU</b> | Blue  |

Matching Pendant Mounts are also available:

|                 |                     |
|-----------------|---------------------|
| <b>555PMB</b>   | Pendant Mount Black |
| <b>555PMWHT</b> | Pendant Mount White |
| <b>555PMRED</b> | Pendant Mount Red   |
| <b>555PMGRN</b> | Pendant Mount Green |
| <b>555PMBLU</b> | Pendant Mount Blue  |





TCP's LED HID T-Shape Series are directional and deliver maximum lumens on the floor. Our corn cob Lamps and sensors are an excellent choice for replacing traditional metal halide products. Our high bay retrofit lamps and sensors are energy efficient, feature an isolated driver for better heat dissipation, eliminating the need for a ballast, and all wattages have 4KV surge protection.

# LED HID LAMPS



| Item Number | Item Description | Voltage | Lamp Watts | Metal Halide Comparison | Lamp Lumens | LPW | Color Temperature | Base | CRI | Case Quantity | 3 in 1 Dimming/Sensor |
|-------------|------------------|---------|------------|-------------------------|-------------|-----|-------------------|------|-----|---------------|-----------------------|
|-------------|------------------|---------|------------|-------------------------|-------------|-----|-------------------|------|-----|---------------|-----------------------|

### 50,000 HOUR LED HID REPLACEMENT LAMPS

#### LED 20W METAL HALIDE REPLACEMENT LAMP, E26 BASE

|           |                                            |          |    |     |      |     |      |     |    |   |   |
|-----------|--------------------------------------------|----------|----|-----|------|-----|------|-----|----|---|---|
| LHID07040 | LED 20W 40K HID Replacement Lamp, E26 Base | 120-277v | 20 | 100 | 3000 | 150 | 4000 | E26 | 80 | 6 | - |
| LHID07050 | LED 20W 50K HID Replacement Lamp, E26 Base | 120-277v | 20 | 100 | 3000 | 150 | 5000 | E26 | 80 | 6 | - |



#### LED 25W METAL HALIDE REPLACEMENT LAMP, E26 BASE

|           |                                            |          |    |     |      |     |      |     |    |   |   |
|-----------|--------------------------------------------|----------|----|-----|------|-----|------|-----|----|---|---|
| LHID10040 | LED 25W 40K HID Replacement Lamp, E26 Base | 120-277v | 25 | 150 | 3750 | 150 | 4000 | E26 | 80 | 6 | - |
| LHID10050 | LED 25W 50K HID Replacement Lamp, E26 Base | 120-277v | 25 | 150 | 3750 | 150 | 5000 | E26 | 80 | 6 | - |



#### LED 40W METAL HALIDE REPLACEMENT LAMP, E26 BASE

|           |                                            |          |    |     |      |       |      |     |    |   |   |
|-----------|--------------------------------------------|----------|----|-----|------|-------|------|-----|----|---|---|
| LHID15040 | LED 40W 40K HID Replacement Lamp, E26 Base | 120-277v | 40 | 175 | 5850 | 146.3 | 4000 | E26 | 80 | 6 | - |
| LHID15050 | LED 40W 50K HID Replacement Lamp, E26 Base | 120-277v | 40 | 175 | 5850 | 146.3 | 5000 | E26 | 80 | 6 | - |



#### LED 65W METAL HALIDE REPLACEMENT LAMP, EX39 BASE

|           |                                             |          |    |     |      |       |      |      |    |   |   |
|-----------|---------------------------------------------|----------|----|-----|------|-------|------|------|----|---|---|
| LHID17540 | LED 65W 40K HID Replacement Lamp, EX39 Base | 120-277v | 65 | 250 | 9900 | 152.3 | 4000 | EX39 | 80 | 6 | - |
| LHID17550 | LED 65W 50K HID Replacement Lamp, EX39 Base | 120-277v | 65 | 250 | 9900 | 152.3 | 5000 | EX39 | 80 | 6 | - |



#### LED 90W METAL HALIDE REPLACEMENT LAMP, EX39 BASE

|           |                                             |          |    |     |       |       |      |      |    |   |   |
|-----------|---------------------------------------------|----------|----|-----|-------|-------|------|------|----|---|---|
| LHID25040 | LED 90W 40K HID Replacement Lamp, EX39 Base | 120-277v | 90 | 400 | 13600 | 151.1 | 4000 | EX39 | 80 | 6 | - |
| LHID25050 | LED 90W 50K HID Replacement Lamp, EX39 Base | 120-277v | 90 | 400 | 13600 | 151.1 | 5000 | EX39 | 80 | 6 | - |



## 50,000 HOUR LED HID REPLACEMENT LAMPS (CONT)

### LED 60W METAL HALIDE REPLACEMENT LAMP, E26 BASE



|               |                                            |          |    |     |      |     |      |     |    |   |   |
|---------------|--------------------------------------------|----------|----|-----|------|-----|------|-----|----|---|---|
| L60HBE265040K | LED 60W 40K HID Replacement Lamp, E26 Base | 100-277v | 60 | 200 | 8100 | 135 | 4000 | E26 | 80 | 6 | - |
| L60HBE265050K | LED 60W 50K HID Replacement Lamp, E26 Base | 100-277v | 60 | 200 | 8100 | 135 | 5000 | E26 | 80 | 6 | - |

### LED 80W METAL HALIDE REPLACEMENT LAMP, EX39 BASE



|                |                                             |          |    |     |       |     |      |      |    |   |   |
|----------------|---------------------------------------------|----------|----|-----|-------|-----|------|------|----|---|---|
| L80HBEX395040K | LED 80W 40K HID Replacement Lamp, EX39 Base | 100-277v | 80 | 250 | 10800 | 135 | 4000 | EX39 | 80 | 6 | - |
| L80HBEX395050K | LED 80W 50K HID Replacement Lamp, EX39 Base | 100-277v | 80 | 250 | 10800 | 135 | 5000 | EX39 | 80 | 6 | - |

### LED 115W METAL HALIDE REPLACEMENT LAMP, EX39 BASE



|                 |                                              |          |     |     |       |     |      |      |    |   |   |
|-----------------|----------------------------------------------|----------|-----|-----|-------|-----|------|------|----|---|---|
| L115HBEX395040K | LED 115W 40K HID Replacement Lamp, EX39 Base | 100-277v | 115 | 400 | 15525 | 135 | 4000 | EX39 | 80 | 6 | - |
| L115HBEX395050K | LED 115W 50K HID Replacement Lamp, EX39 Base | 100-277v | 115 | 400 | 15525 | 135 | 5000 | EX39 | 80 | 6 | - |

## 50,000 HOUR LED HID REPLACEMENT AREA LAMPS

### LED 100W METAL HALIDE REPLACEMENT AREA LAMP, E26 BASE



|              |                                               |          |    |     |      |     |      |     |    |   |    |
|--------------|-----------------------------------------------|----------|----|-----|------|-----|------|-----|----|---|----|
| L20ARE26U40K | LED 20W 40K HID100 Replacement Lamp, E26 Base | 100-277v | 20 | 100 | 3000 | 150 | 4000 | E26 | 80 | 6 | NO |
| L20ARE26U50K | LED 20W 50K HID100 Replacement Lamp, E26 Base | 100-277v | 20 | 100 | 3000 | 150 | 5000 | E26 | 80 | 6 | NO |

### LED 200W METAL HALIDE REPLACEMENT AREA LAMP, EX39 BASE



|               |                                                |          |    |     |      |     |      |      |    |   |    |
|---------------|------------------------------------------------|----------|----|-----|------|-----|------|------|----|---|----|
| L40AREX39U40K | LED 40W 40K HID200 Replacement Lamp, EX39 Base | 100-277v | 40 | 200 | 6000 | 150 | 4000 | EX39 | 80 | 6 | NO |
| L40AREX39U50K | LED 40W 50K HID200 Replacement Lamp, EX39 Base | 100-277v | 40 | 200 | 6000 | 150 | 5000 | EX39 | 80 | 6 | NO |

### LED 250W METAL HALIDE REPLACEMENT AREA LAMP, EX39 BASE



|               |                                                |          |    |     |      |     |      |      |    |   |    |
|---------------|------------------------------------------------|----------|----|-----|------|-----|------|------|----|---|----|
| L60AREX39U40K | LED 60W 40K HID250 Replacement Lamp, EX39 Base | 100-277v | 60 | 250 | 9000 | 150 | 4000 | EX39 | 80 | 6 | NO |
| L60AREX39U50K | LED 60W 50K HID250 Replacement Lamp, EX39 Base | 100-277v | 60 | 250 | 9000 | 150 | 5000 | EX39 | 80 | 6 | NO |

### LED 320W METAL HALIDE REPLACEMENT AREA LAMP, EX39 BASE



|               |                                                |          |    |     |       |     |      |      |    |   |     |
|---------------|------------------------------------------------|----------|----|-----|-------|-----|------|------|----|---|-----|
| L80AREX39U40K | LED 80W 40K HID320 Replacement Lamp, EX39 Base | 100-277v | 80 | 320 | 11200 | 150 | 4000 | EX39 | 80 | 6 | YES |
| L80AREX39U50K | LED 80W 50K HID320 Replacement Lamp, EX39 Base | 100-277v | 80 | 320 | 11200 | 150 | 5000 | EX39 | 80 | 6 | YES |

### LED 400W METAL HALIDE REPLACEMENT AREA LAMP, EX39 BASE



|                |                                                 |          |     |     |       |     |      |      |    |   |     |
|----------------|-------------------------------------------------|----------|-----|-----|-------|-----|------|------|----|---|-----|
| L110AREX39U40K | LED 110W 40K HID100 Replacement Lamp, EX39 Base | 100-277v | 110 | 400 | 15400 | 150 | 4000 | EX39 | 80 | 6 | YES |
| L110AREX39U50K | LED 110W 50K HID100 Replacement Lamp, EX39 Base | 100-277v | 110 | 400 | 15400 | 150 | 5000 | EX39 | 80 | 6 | YES |

| Item Number | Item Description | Voltage | Lamp Watts | Metal Halide Comparison | Lamp Lumens | LPW | Color Temperature | Base | CRI | Case Quantity | 3 in 1 Dimming/Sensor |
|-------------|------------------|---------|------------|-------------------------|-------------|-----|-------------------|------|-----|---------------|-----------------------|
|-------------|------------------|---------|------------|-------------------------|-------------|-----|-------------------|------|-----|---------------|-----------------------|

### 50,000 HOUR LED HID REPLACEMENT CORN COB LAMPS

#### LED 50W METAL HALIDE REPLACEMENT CORN COB LAMP, E26 BASE

|              |                                                     |          |    |    |      |     |      |     |    |   |    |
|--------------|-----------------------------------------------------|----------|----|----|------|-----|------|-----|----|---|----|
| L12CCE26U40K | LED 12W 40K HID Replacement Corn Cob Lamp, E26 Base | 100-277v | 12 | 50 | 1800 | 150 | 4000 | E26 | 85 | 6 | NO |
| L12CCE26U50K | LED 12W 50K HID Replacement Corn Cob Lamp, E26 Base | 100-277v | 12 | 50 | 1800 | 150 | 5000 | E26 | 85 | 6 | NO |



#### LED 75W METAL HALIDE REPLACEMENT CORN COB LAMP, E26 BASE

|              |                                                     |          |    |    |      |     |      |     |    |   |    |
|--------------|-----------------------------------------------------|----------|----|----|------|-----|------|-----|----|---|----|
| L18CCE26U40K | LED 18W 40K HID Replacement Corn Cob Lamp, E26 Base | 100-277v | 18 | 75 | 2700 | 150 | 4000 | E26 | 85 | 6 | NO |
| L18CCE26U50K | LED 18W 50K HID Replacement Corn Cob Lamp, E26 Base | 100-277v | 18 | 75 | 2700 | 150 | 5000 | E26 | 85 | 6 | NO |



#### LED 100W METAL HALIDE REPLACEMENT CORN COB LAMP, E26 BASE

|              |                                                     |          |    |     |      |     |      |     |    |   |    |
|--------------|-----------------------------------------------------|----------|----|-----|------|-----|------|-----|----|---|----|
| L27CCE26U40K | LED 27W 40K HID Replacement Corn Cob Lamp, E26 Base | 100-277v | 27 | 100 | 4050 | 150 | 4000 | E26 | 85 | 6 | NO |
| L27CCE26U50K | LED 27W 50K HID Replacement Corn Cob Lamp, E26 Base | 100-277v | 27 | 100 | 4050 | 150 | 5000 | E26 | 85 | 6 | NO |



#### LED 175W METAL HALIDE REPLACEMENT CORN COB LAMP, E26 BASE

|              |                                                     |          |    |     |      |     |      |     |    |   |     |
|--------------|-----------------------------------------------------|----------|----|-----|------|-----|------|-----|----|---|-----|
| L36CCE26U40K | LED 36W 40K HID Replacement Corn Cob Lamp, E26 Base | 100-277v | 36 | 175 | 5400 | 150 | 4000 | E26 | 85 | 6 | YES |
| L36CCE26U50K | LED 36W 50K HID Replacement Corn Cob Lamp, E26 Base | 100-277v | 36 | 175 | 5400 | 150 | 5000 | E26 | 85 | 6 | YES |



#### LED 200W METAL HALIDE REPLACEMENT CORN COB LAMP, E26 BASE

|              |                                                     |          |    |     |      |     |      |     |    |   |     |
|--------------|-----------------------------------------------------|----------|----|-----|------|-----|------|-----|----|---|-----|
| L45CCE26U40K | LED 45W 40K HID Replacement Corn Cob Lamp, E26 Base | 100-277v | 45 | 200 | 6750 | 150 | 4000 | E26 | 85 | 6 | YES |
| L45CCE26U50K | LED 45W 50K HID Replacement Corn Cob Lamp, E26 Base | 100-277v | 45 | 200 | 6750 | 150 | 5000 | E26 | 85 | 6 | YES |





| Item Description | Item Number | Voltage | Lamp Watts | Metal Halide Comparison | Lamp Lumens | LPW | Color Temperature | Base | CRI | Case Quantity | 3 in 1 Dimming/Sensor |
|------------------|-------------|---------|------------|-------------------------|-------------|-----|-------------------|------|-----|---------------|-----------------------|
|------------------|-------------|---------|------------|-------------------------|-------------|-----|-------------------|------|-----|---------------|-----------------------|

#### LED 200W METAL HALIDE REPLACEMENT CORN COB LAMP, EX39 BASE



|               |                                                      |         |    |     |      |     |      |      |    |   |     |
|---------------|------------------------------------------------------|---------|----|-----|------|-----|------|------|----|---|-----|
| L45CCEX39U40K | LED 45W 40K HID Replacement Corn Cob Lamp, EX39 Base | 100-277 | 45 | 200 | 6750 | 150 | 4000 | EX39 | 85 | 6 | YES |
| L45CCEX39U50K | LED 45W 50K HID Replacement Corn Cob Lamp, EX39 Base | 100-277 | 45 | 200 | 6750 | 150 | 5000 | EX39 | 85 | 6 | YES |

#### LED 250W METAL HALIDE REPLACEMENT CORN COB LAMP, EX39 BASE



|               |                                                      |         |    |     |      |     |      |      |    |   |     |
|---------------|------------------------------------------------------|---------|----|-----|------|-----|------|------|----|---|-----|
| L54CCEX39U40K | LED 54W 40K HID Replacement Corn Cob Lamp, EX39 Base | 100-277 | 54 | 250 | 8100 | 150 | 4000 | EX39 | 85 | 6 | YES |
| L54CCEX39U50K | LED 54W 50K HID Replacement Corn Cob Lamp, EX39 Base | 100-277 | 54 | 250 | 8100 | 150 | 5000 | EX39 | 85 | 6 | YES |

#### LED 300W METAL HALIDE REPLACEMENT CORN COB LAMP, EX39 BASE



|               |                                                      |         |    |     |      |     |      |      |    |   |     |
|---------------|------------------------------------------------------|---------|----|-----|------|-----|------|------|----|---|-----|
| L63CCEX39U40K | LED 63W 40K HID Replacement Corn Cob Lamp, EX39 Base | 100-277 | 63 | 300 | 9450 | 150 | 4000 | EX39 | 85 | 6 | YES |
| L63CCEX39U50K | LED 63W 50K HID Replacement Corn Cob Lamp, EX39 Base | 100-277 | 63 | 300 | 9450 | 150 | 5000 | EX39 | 85 | 6 | YES |

#### LED 320W METAL HALIDE REPLACEMENT CORN COB LAMP, EX39 BASE



|               |                                                      |         |    |     |       |     |      |      |    |   |     |
|---------------|------------------------------------------------------|---------|----|-----|-------|-----|------|------|----|---|-----|
| L80CCEX39U40K | LED 80W 40K HID Replacement Corn Cob Lamp, EX39 Base | 100-277 | 80 | 320 | 12000 | 150 | 4000 | EX39 | 85 | 6 | YES |
| L80CCEX39U50K | LED 80W 50K HID Replacement Corn Cob Lamp, EX39 Base | 100-277 | 80 | 320 | 12000 | 150 | 5000 | EX39 | 85 | 6 | YES |

#### LED 400W METAL HALIDE REPLACEMENT CORN COB LAMP, EX39 BASE



|                |                                                       |         |     |     |       |     |      |      |    |   |     |
|----------------|-------------------------------------------------------|---------|-----|-----|-------|-----|------|------|----|---|-----|
| L100CCEX39U40K | LED 100W 40K HID Replacement Corn Cob Lamp, EX39 Base | 100-277 | 100 | 400 | 15000 | 150 | 4000 | EX39 | 85 | 6 | YES |
| L100CCEX39U50K | LED 100W 50K HID Replacement Corn Cob Lamp, EX39 Base | 100-277 | 100 | 400 | 15000 | 150 | 5000 | EX39 | 85 | 6 | YES |


#### LED 500W METAL HALIDE REPLACEMENT CORN COB LAMP, EX39 BASE



|                |                                              |         |     |     |       |     |      |      |    |   |     |
|----------------|----------------------------------------------|---------|-----|-----|-------|-----|------|------|----|---|-----|
| L120MHX395040K | LED 120W 40K HID Replacement Lamp, EX39 Base | 100-277 | 100 | 400 | 18000 | 150 | 4000 | EX39 | 85 | 6 | YES |
| L120MHX395050K | LED 120W 50K HID Replacement Lamp, EX39 Base | 100-277 | 100 | 400 | 18000 | 150 | 5000 | EX39 | 85 | 6 | YES |

## LED HID CORN COB LAMP SENSORS

### Specifications

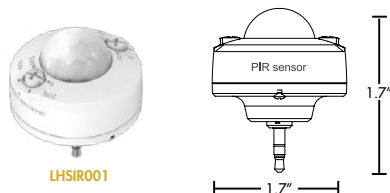


#### HID HB PIR Occupancy Sensor:

When connected to the TCP HID Corn Cob Lamp, the sensor delivers excellent motion detection. When no motion is detected, the TCP HID Corn Cob Lamp brightness will be switched to a preset Dim Level from 0 – 60%. When motion is detected, the TCP HID Corn Cob Lamp, brightness will be switched to 100% for a preset Hold Time. If natural light is present, the lamp will turn off.

##### Features:

- Normal Motion Detecting
- Daylight Threshold
- Step Dimming
- Do not expose directly to water
- One module for one lamp
- Not suitable for enclosed luminaries
- Set the Dim Level and Hold Time before installation

|                          |                                |                            |                                 |
|--------------------------|--------------------------------|----------------------------|---------------------------------|
| Voltage.....             | 15V DC $\pm$ 2V                | Illuminance.....           | Around 300LUX                   |
| Output Voltage.....      | 0-10V                          | Operating Temperature..... | -20°C ~ + 35°C (4°F ~ + 95°F)   |
| Current.....             | 20mA                           | Storage Temperature.....   | -20°C ~ + 40°C (-4°F ~ + 104°F) |
| Sensing Angle.....       | 120° (Installation Vertically) | Hold Time Options.....     | 30S/90S/5Min/10Min              |
| Detecting Range.....     | Around Dia 10m                 | IP Rating.....             | IP20                            |
| Standby Power Range..... | 0% - 60%                       | Warranty.....              | 5 Years                         |

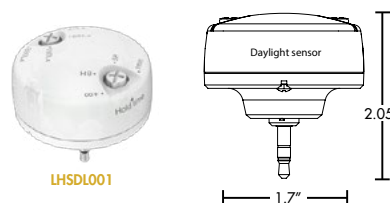


#### HID HB Daylight Sensor:

When connected to the TCP HID Corn Cob Lamp, the sensor delivers natural light detection. When the natural light level is below the Lux setting, the TCP HID Corn Cob Lamp will turn on for the preset Hold Time. When the natural light level is above the Lux setting, the TCP HID Corn Cob Lamp will turn on.

##### Features:

- Only Identify Natural Light
- Daylight Threshold
- One module for one lamp
- Set the Lux Level and Hold Time before installation

|                     |                 |                            |                               |
|---------------------|-----------------|----------------------------|-------------------------------|
| Voltage.....        | 15V DC $\pm$ 2V | Operating Temperature..... | -20°C ~ + 60°C, -4°F ~ + 14°F |
| Output Voltage..... | 0-10V           | IP Rating.....             | IP20                          |
| Current.....        | 20mA            | Warranty.....              | 5 Years                       |
| LUX Range.....      | 20-∞            |                            |                               |

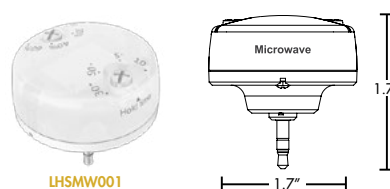

#### HID HB Microwave Occupancy Sensor:


When connected to the TCP HID Corn Cob Lamp, the sensor delivers 120° detection through objects and walls. When no motion is detected, the TCP HID Corn Cob Lamp brightness will be switched to a preset Dim Level from 0 – 60%. When motion is detected, the TCP HID Corn Cob Lamp brightness will be switched to 100% for a preset Hold Time.


##### Features:

- Normal Motion Detecting
- ON/OFF Function
- Step Dimming
- Do not expose directly to water
- One module for one lamp
- Not for outdoor use
- Set the Dim Level and Hold Time before installation

|                     |                                |                            |                                 |
|---------------------|--------------------------------|----------------------------|---------------------------------|
| Frequency.....      | 5.8 GHz $\pm$ 75MHz            | Detecting Range.....       | Around Dia 10m                  |
| Voltage.....        | 15V DC $\pm$ 2V                | Operating Temperature..... | -20°C ~ + 60°C (-4°F ~ + 140°F) |
| Output Voltage..... | 0-10V                          | Storage Temperature.....   | -20°C ~ + 40°C (-4°F ~ + 104°F) |
| Current.....        | 20mA                           | IP Rating.....             | IP20                            |
| Transmit Power..... | 1mW                            | Warranty.....              | 5 Years                         |
| Sensing Angle.....  | 120° (Installation Vertically) |                            |                                 |

### Sensor Installation

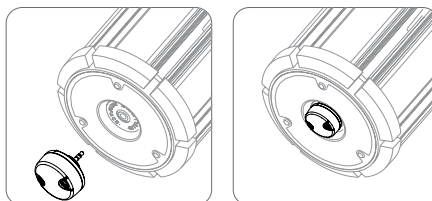

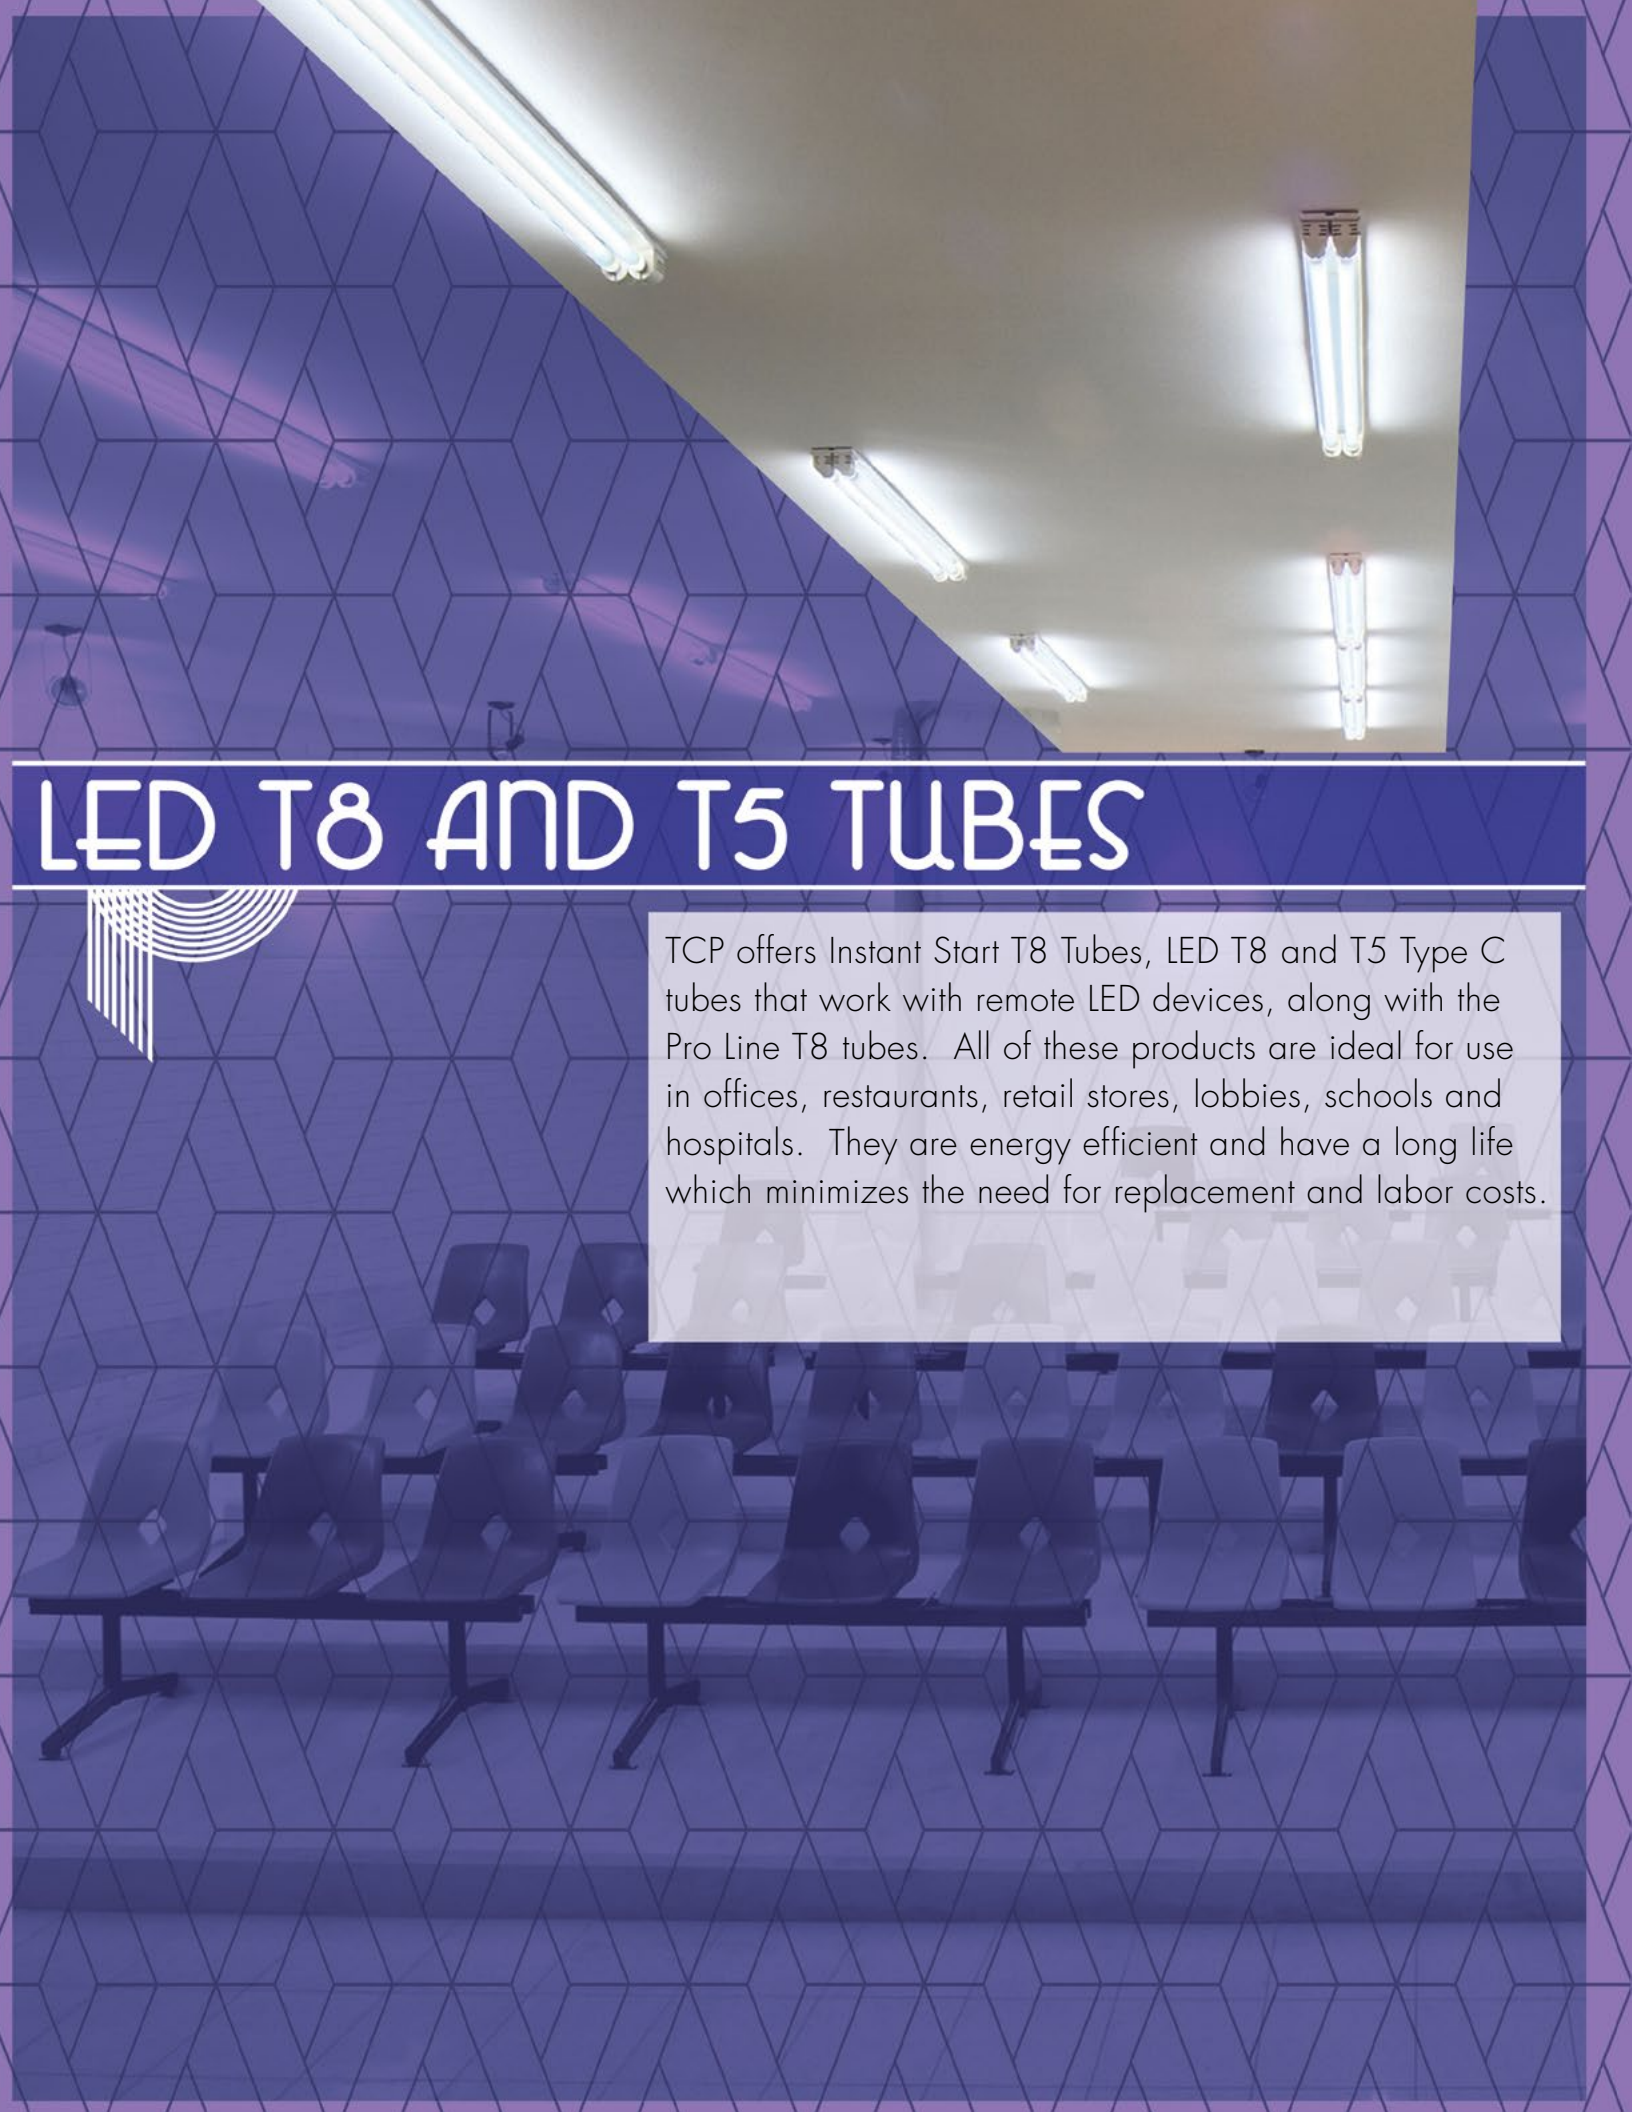

# LED T8 AND T5 TUBES



TCP offers Instant Start T8 Tubes, LED T8 and T5 Type C tubes that work with remote LED devices, along with the Pro Line T8 tubes. All of these products are ideal for use in offices, restaurants, retail stores, lobbies, schools and hospitals. They are energy efficient and have a long life which minimizes the need for replacement and labor costs.

# LED T8 AND T5 TUBES



**Liberat8™**  
LED

| Item Number                                                                           | Item Description                         | Lamp Wattage | Voltage  | Fluorescent Equivalency | Lumens | Lumens Per Watt | Base | CCT  | CRI | Master Pack |
|---------------------------------------------------------------------------------------|------------------------------------------|--------------|----------|-------------------------|--------|-----------------|------|------|-----|-------------|
| <b>50,000 HOUR LED LIBERAT8™ BALLAST BYPASS TUBES</b>                                 |                                          |              |          |                         |        |                 |      |      |     |             |
| <b>15W T8 BALLAST BYPASS - 4 FOOT ALL GLASS TUBES, G13 BASE</b>                       |                                          |              |          |                         |        |                 |      |      |     |             |
| LT813B230K                                                                            | LED 15W Ballast Bypass 4 Foot T8 - 30K   | 13.5         | 120-277v | 32                      | 1700   | 125.9           | G13  | 3000 | 80  | 25          |
| LT813B235K                                                                            | LED 15W Ballast Bypass 4 Foot T8 - 35K   | 13.5         | 120-277v | 32                      | 1700   | 125.9           | G13  | 3500 | 80  | 25          |
| LT813B241K                                                                            | LED 15W Ballast Bypass 4 Foot T8 - 41K   | 13.5         | 120-277v | 32                      | 1800   | 133.3           | G13  | 4100 | 80  | 25          |
| LT813B250K                                                                            | LED 15W Ballast Bypass 4 Foot T8 - 50K   | 13.5         | 120-277v | 32                      | 1800   | 133.3           | G13  | 5000 | 80  | 25          |
| LT813B265K                                                                            | LED 15W Ballast Bypass 4 Foot T8 - 65K   | 13.5         | 120-277v | 32                      | 1800   | 133.3           | G13  | 6500 | 80  | 25          |
| <b>10.5W T8 BALLAST BYPASS - 4 FOOT ALL GLASS TUBES, G13 BASE</b>                     |                                          |              |          |                         |        |                 |      |      |     |             |
| LT810B235K                                                                            | LED 10.5W Ballast Bypass 4 Foot T8 - 35K | 10.5         | 120-277v | 32                      | 1650   | 157.1           | G13  | 3500 | 80  | 25          |
| LT810B241K                                                                            | LED 10.5W Ballast Bypass 4 Foot T8 - 41K | 10.5         | 120-277v | 32                      | 1650   | 157.1           | G13  | 4100 | 80  | 25          |
| LT810B250K                                                                            | LED 10.5W Ballast Bypass 4 Foot T8 - 50K | 10.5         | 120-277v | 32                      | 1650   | 157.1           | G13  | 5000 | 80  | 25          |
| <b>13.5W T8 BALLAST BYPASS - 4 FOOT SHATTERPROOF PET COATED GLASS TUBES, G13 BASE</b> |                                          |              |          |                         |        |                 |      |      |     |             |
| L13T8BY5030K                                                                          | LED 13.5W Ballast Bypass 4 Foot T8 - 30K | 13.5         | 120-277v | 32                      | 1700   | 133.3           | G13  | 3000 | 80  | 25          |
| L13T8BY5035K                                                                          | LED 13.5W Ballast Bypass 4 Foot T8 - 35K | 13.5         | 120-277v | 32                      | 1700   | 133.3           | G13  | 3500 | 80  | 25          |
| L13T8BY5041K                                                                          | LED 13.5W Ballast Bypass 4 Foot T8 - 41K | 13.5         | 120-277v | 32                      | 1800   | 140.7           | G13  | 4100 | 80  | 25          |
| L13T8BY5050K                                                                          | LED 13.5W Ballast Bypass 4 Foot T8 - 50K | 13.5         | 120-277v | 32                      | 1800   | 148.1           | G13  | 5000 | 80  | 25          |
| <b>12W T8 BALLAST BYPASS - 3 FOOT SHATTERPROOF PET COATED GLASS TUBES, G13 BASE</b>   |                                          |              |          |                         |        |                 |      |      |     |             |
| L12T8BY5030K                                                                          | LED 12W Ballast Bypass 3 Foot T8 - 30K   | 12           | 120-277v | 25                      | 1400   | 100             | G13  | 3000 | 80  | 25          |
| L12T8BY5035K                                                                          | LED 12W Ballast Bypass 3 Foot T8 - 35K   | 12           | 120-277v | 25                      | 1400   | 100             | G13  | 3500 | 80  | 25          |
| L12T8BY5041K                                                                          | LED 12W Ballast Bypass 3 Foot T8 - 41K   | 12           | 120-277v | 25                      | 1450   | 100             | G13  | 4100 | 80  | 25          |
| L12T8BY5050K                                                                          | LED 12W Ballast Bypass 3 Foot T8 - 50K   | 12           | 120-277v | 25                      | 1450   | 100             | G13  | 5000 | 80  | 25          |
| <b>9W T8 BALLAST BYPASS - 2 FOOT SHATTERPROOF PET COATED GLASS TUBES, G13 BASE</b>    |                                          |              |          |                         |        |                 |      |      |     |             |
| L9T8BY5030K                                                                           | LED 9W Ballast Bypass 2 Foot T8 - 30K    | 9            | 120-277v | 17                      | 1100   | 125             | G13  | 3000 | 80  | 25          |
| L9T8BY5035K                                                                           | LED 9W Ballast Bypass 2 Foot T8 - 35K    | 9            | 120-277v | 17                      | 1100   | 125             | G13  | 3500 | 80  | 25          |
| L9T8BY5041K                                                                           | LED 9W Ballast Bypass 2 Foot T8 - 41K    | 9            | 120-277v | 17                      | 1150   | 133.3           | G13  | 4100 | 80  | 25          |
| L9T8BY5050K                                                                           | LED 9W Ballast Bypass 2 Foot T8 - 50K    | 9            | 120-277v | 17                      | 1150   | 138.8           | G13  | 5000 | 80  | 25          |



## 50,000 HOUR LED LIBERAT8™ BALLAST BYPASS TUBES

### 43W T8 BALLAST BYPASS - 8 FOOT GLASS TUBES, R17D BASE



|               |                                                   |    |          |    |      |       |      |      |    |    |
|---------------|---------------------------------------------------|----|----------|----|------|-------|------|------|----|----|
| LT8R43B230KBP | LED 43W Ballast Bypass 8 Foot T8, R17d Base - 30K | 43 | 120-277v | 75 | 5100 | 118.6 | R17d | 3000 | 80 | 10 |
| LT8R43B235KBP | LED 43W Ballast Bypass 8 Foot T8, R17d Base - 35K | 43 | 120-277v | 75 | 5500 | 127.9 | R17d | 3500 | 80 | 10 |
| LT8R43B240KBP | LED 43W Ballast Bypass 8 Foot T8, R17d Base - 40K | 43 | 120-277v | 75 | 5500 | 127.9 | R17d | 4100 | 80 | 10 |
| LT8R43B250KBP | LED 43W Ballast Bypass 8 Foot T8, R17d Base - 50K | 43 | 120-277v | 75 | 5500 | 127.9 | R17d | 5000 | 80 | 10 |
| LT8R43B265KBP | LED 43W Ballast Bypass 8 Foot T8, R17d Base - 65K | 43 | 120-277v | 75 | 5500 | 127.9 | R17d | 6500 | 80 | 10 |

### 43W T8 BALLAST BYPASS - 8 FOOT GLASS TUBES, FA8 BASE



|               |                                                  |    |          |    |      |       |     |      |    |    |
|---------------|--------------------------------------------------|----|----------|----|------|-------|-----|------|----|----|
| LT8F43B230KBP | LED 43W Ballast Bypass 8 Foot T8, Fa8 Base - 30K | 43 | 120-277v | 75 | 5100 | 118.6 | Fa8 | 3000 | 80 | 10 |
| LT8F43B235KBP | LED 43W Ballast Bypass 8 Foot T8, Fa8 Base - 35K | 43 | 120-277v | 75 | 5500 | 127.9 | Fa8 | 3500 | 80 | 10 |
| LT8F43B240KBP | LED 43W Ballast Bypass 8 Foot T8, Fa8 Base - 40K | 43 | 120-277v | 75 | 5500 | 127.9 | Fa8 | 4000 | 80 | 10 |
| LT8F43B250KBP | LED 43W Ballast Bypass 8 Foot T8, Fa8 Base - 50K | 43 | 120-277v | 75 | 5500 | 127.9 | Fa8 | 5000 | 80 | 10 |
| LT8F43B265KBP | LED 43W Ballast Bypass 8 Foot T8, Fa8 Base - 65K | 43 | 120-277v | 75 | 5500 | 127.9 | Fa8 | 6500 | 80 | 10 |

### 34W T8 BALLAST BYPASS - 8 FOOT GLASS TUBES, FA8 BASE

|               |                                                  |    |          |    |      |       |     |      |    |    |
|---------------|--------------------------------------------------|----|----------|----|------|-------|-----|------|----|----|
| LT8F34B240KBP | LED 34W Ballast Bypass 8 Foot T8, Fa8 Base - 40K | 34 | 120-277v | 60 | 4400 | 129.4 | Fa8 | 4000 | 80 | 10 |
| LT8F34B250KBP | LED 34W Ballast Bypass 8 Foot T8, Fa8 Base - 50K | 34 | 120-277v | 60 | 4400 | 129.4 | Fa8 | 5000 | 80 | 10 |

### 15.5W T8 BALLAST BYPASS - 2 FOOT SHATTERPROOF U-BEND PLASTIC TUBES, G13 BASE



|               |                                                 |      |          |    |      |       |     |      |    |    |
|---------------|-------------------------------------------------|------|----------|----|------|-------|-----|------|----|----|
| LPT8U615B230K | LED 15.5W Ballast Bypass 2 Foot U-Bend T8 - 30K | 15.5 | 120-277v | 32 | 2000 | 129   | G13 | 3000 | 80 | 25 |
| LPT8U615B235K | LED 15.5W Ballast Bypass 2 Foot U-Bend T8 - 35K | 15.5 | 120-277v | 32 | 2000 | 129   | G13 | 3500 | 80 | 25 |
| LPT8U615B241K | LED 15.5W Ballast Bypass 2 Foot U-Bend T8 - 41K | 15.5 | 120-277v | 32 | 2100 | 135.5 | G13 | 4100 | 80 | 25 |
| LPT8U615B250K | LED 15.5W Ballast Bypass 2 Foot U-Bend T8 - 50K | 15.5 | 120-277v | 32 | 2100 | 135.5 | G13 | 5000 | 80 | 25 |

| Item Number                                                                   | Item Description                                     | Lamp Wattage | Voltage  | Fluorescent Equivalency | Lumens | Lumens Per Watt | Base | CCT  | CRI | Master Pack |
|-------------------------------------------------------------------------------|------------------------------------------------------|--------------|----------|-------------------------|--------|-----------------|------|------|-----|-------------|
| <b>50,000 HOUR LED LIBERAT8™ BALLAST BYPASS TUBES</b>                         |                                                      |              |          |                         |        |                 |      |      |     |             |
| <b>24.5W T8 HIGH OUTPUT BALLAST BYPASS - 4 FOOT ALL GLASS TUBES, G13 BASE</b> |                                                      |              |          |                         |        |                 |      |      |     |             |
| LPT824B230K                                                                   | LED 24.5W High Output Ballast Bypass 4 Foot T8 - 30K | 24.5         | 120-277v | 32                      | 2850   | 116.3           | G13  | 3000 | 80  | 25          |
| LPT824B235K                                                                   | LED 24.5W High Output Ballast Bypass 4 Foot T8 - 35K | 24.5         | 120-277v | 32                      | 2850   | 116.3           | G13  | 3500 | 80  | 25          |
| LPT824B241K                                                                   | LED 24.5W High Output Ballast Bypass 4 Foot T8 - 41K | 24.5         | 120-277v | 32                      | 3000   | 122.4           | G13  | 4100 | 80  | 25          |
| LPT824B250K                                                                   | LED 24.5W High Output Ballast Bypass 4 Foot T8 - 50K | 24.5         | 120-277v | 32                      | 3000   | 122.4           | G13  | 5000 | 80  | 25          |
| <b>18.5W T8 HIGH OUTPUT BALLAST BYPASS - 4 FOOT ALL GLASS TUBES, G13 BASE</b> |                                                      |              |          |                         |        |                 |      |      |     |             |
| LPT818B230K                                                                   | LED 18.5W Ballast Bypass 4 Foot T8 - 30K             | 18.5         | 120-277v | 32                      | 2450   | 132.4           | G13  | 3000 | 80  | 25          |
| LPT818B235K                                                                   | LED 18.5W Ballast Bypass 4 Foot T8 - 35K             | 18.5         | 120-277v | 32                      | 2450   | 132.4           | G13  | 3500 | 80  | 25          |
| LPT818B241K                                                                   | LED 18.5W Ballast Bypass 4 Foot T8 - 41K             | 18.5         | 120-277v | 32                      | 2600   | 140.5           | G13  | 4100 | 80  | 25          |
| LPT818B250K                                                                   | LED 18.5W Ballast Bypass 4 Foot T8 - 50K             | 18.5         | 120-277v | 32                      | 2600   | 140.5           | G13  | 5000 | 80  | 25          |
| <b>15W T8 HIGH OUTPUT BALLAST BYPASS - 4 FOOT ALL GLASS TUBES, G13 BASE</b>   |                                                      |              |          |                         |        |                 |      |      |     |             |
| <b>COMING SOON</b>                                                            |                                                      |              |          |                         |        |                 |      |      |     |             |
| LPT815B230K                                                                   | LED 15W High Output Ballast Bypass 4 Foot T8 - 30K   | 15           | 120-277v | 32                      | 2100   | 140             | G13  | 3000 | 80  | 25          |
| LPT815B235K                                                                   | LED 15W High Output Ballast Bypass 4 Foot T8 - 35K   | 15           | 120-277v | 32                      | 2100   | 140             | G13  | 3500 | 80  | 25          |
| LPT815B241K                                                                   | LED 15W High Output Ballast Bypass 4 Foot T8 - 41K   | 15           | 120-277v | 32                      | 2200   | 146.7           | G13  | 4100 | 80  | 25          |
| LPT815B250K                                                                   | LED 15W High Output Ballast Bypass 4 Foot T8 - 50K   | 15           | 120-277v | 32                      | 2200   | 146.7           | G13  | 5000 | 80  | 25          |



Item Number

Item Description

Lamp Wattage

Voltage

Fluorescent Equivalency

Lumens

Lumens Per Watt

Base

CCT

CRI

Master Pack

**50,000 HOUR LED LIBERAT5™ BALLAST BYPASS TUBES**
**12W T5 HIGH OUTPUT BALLAST BYPASS - 2 FOOT ALL GLASS TUBES, G5 BASE**

|              |                                                    |    |          |    |      |       |    |      |    |    |
|--------------|----------------------------------------------------|----|----------|----|------|-------|----|------|----|----|
| LT5H012B130K | LED 12W High Output Ballast Bypass 2 Foot T5 - 30K | 12 | 120-277v | 24 | 1450 | 120.8 | G5 | 3000 | 80 | 25 |
| LT5H012B135K | LED 12W High Output Ballast Bypass 2 Foot T5 - 35K | 12 | 120-277v | 24 | 1450 | 120.8 | G5 | 3500 | 80 | 25 |
| LT5H012B141K | LED 12W High Output Ballast Bypass 2 Foot T5 - 41K | 12 | 120-277v | 24 | 1450 | 120.8 | G5 | 4100 | 80 | 25 |
| LT5H012B150K | LED 12W High Output Ballast Bypass 2 Foot T5 - 50K | 12 | 120-277v | 24 | 1450 | 120.8 | G5 | 5000 | 80 | 25 |

**16W T5 HIGH OUTPUT BALLAST BYPASS - 3 FOOT ALL GLASS TUBES, G5 BASE**

|              |                                                    |    |          |    |      |       |    |      |    |    |
|--------------|----------------------------------------------------|----|----------|----|------|-------|----|------|----|----|
| LT5H016B130K | LED 16W High Output Ballast Bypass 3 Foot T5 - 30K | 16 | 120-277v | 39 | 1850 | 115.6 | G5 | 3000 | 80 | 25 |
| LT5H016B135K | LED 16W High Output Ballast Bypass 3 Foot T5 - 35K | 16 | 120-277v | 39 | 1850 | 115.6 | G5 | 3500 | 80 | 25 |
| LT5H016B141K | LED 16W High Output Ballast Bypass 3 Foot T5 - 41K | 16 | 120-277v | 39 | 1850 | 115.6 | G5 | 4100 | 80 | 25 |
| LT5H016B150K | LED 16W High Output Ballast Bypass 3 Foot T5 - 50K | 16 | 120-277v | 39 | 1850 | 115.6 | G5 | 5000 | 80 | 25 |

**25W T5 HIGH OUTPUT BALLAST BYPASS - 4 FOOT ALL GLASS TUBES, G5 BASE (DLC SEARCH "LT5H025B1XXK")**

|              |                                                    |    |          |    |      |     |    |      |    |    |
|--------------|----------------------------------------------------|----|----------|----|------|-----|----|------|----|----|
| LT5H025B130K | LED 25W High Output Ballast Bypass 4 Foot T5 - 30K | 25 | 120-277v | 54 | 3200 | 128 | G5 | 3000 | 80 | 25 |
| LT5H025B135K | LED 25W High Output Ballast Bypass 4 Foot T5 - 35K | 25 | 120-277v | 54 | 3200 | 128 | G5 | 3500 | 80 | 25 |
| LT5H025B141K | LED 25W High Output Ballast Bypass 4 Foot T5 - 41K | 25 | 120-277v | 54 | 3200 | 128 | G5 | 4100 | 80 | 25 |
| LT5H025B150K | LED 25W High Output Ballast Bypass 4 Foot T5 - 50K | 25 | 120-277v | 54 | 3200 | 128 | G5 | 5000 | 80 | 25 |

**9W T5 BALLAST BYPASS - 2 FOOT ALL GLASS TUBES, G5 BASE**

|              |                                       |   |          |    |      |       |    |      |    |    |
|--------------|---------------------------------------|---|----------|----|------|-------|----|------|----|----|
| LT5HE09B130K | LED 9W Ballast Bypass 2 Foot T8 - 30K | 9 | 120-277v | 14 | 1150 | 127.7 | G5 | 3000 | 80 | 25 |
| LT5HE09B135K | LED 9W Ballast Bypass 2 Foot T8 - 35K | 9 | 120-277v | 14 | 1150 | 127.7 | G5 | 3500 | 80 | 25 |
| LT5HE09B141K | LED 9W Ballast Bypass 2 Foot T8 - 41K | 9 | 120-277v | 14 | 1150 | 127.7 | G5 | 4100 | 80 | 25 |
| LT5HE09B150K | LED 9W Ballast Bypass 2 Foot T8 - 50K | 9 | 120-277v | 14 | 1150 | 127.7 | G5 | 5000 | 80 | 25 |

**12W T5 BALLAST BYPASS - 3 FOOT ALL GLASS TUBES, G5 BASE**

|              |                                        |    |          |    |      |       |    |      |    |    |
|--------------|----------------------------------------|----|----------|----|------|-------|----|------|----|----|
| LT5HE12B130K | LED 12W Ballast Bypass 3 Foot T8 - 30K | 12 | 120-277v | 21 | 1350 | 112.5 | G5 | 3000 | 80 | 25 |
| LT5HE12B135K | LED 12W Ballast Bypass 3 Foot T8 - 35K | 12 | 120-277v | 21 | 1350 | 112.5 | G5 | 3500 | 80 | 25 |
| LT5HE12B141K | LED 12W Ballast Bypass 3 Foot T8 - 41K | 12 | 120-277v | 21 | 1350 | 112.5 | G5 | 4100 | 80 | 25 |
| LT5HE12B150K | LED 12W Ballast Bypass 3 Foot T8 - 50K | 12 | 120-277v | 21 | 1350 | 112.5 | G5 | 5000 | 80 | 25 |

**13W T5 BALLAST BYPASS - 4 FOOT ALL GLASS TUBES, G5 BASE (DLC SEARCH "LT5HE13B1XXK")**

|              |                                        |    |          |    |      |       |    |      |    |    |
|--------------|----------------------------------------|----|----------|----|------|-------|----|------|----|----|
| LT5HE13B130K | LED 13W Ballast Bypass 4 Foot T8 - 30K | 13 | 120-277v | 28 | 1650 | 126.9 | G5 | 3000 | 80 | 25 |
| LT5HE13B135K | LED 13W Ballast Bypass 4 Foot T8 - 35K | 13 | 120-277v | 28 | 1650 | 126.9 | G5 | 3500 | 80 | 25 |
| LT5HE13B141K | LED 13W Ballast Bypass 4 Foot T8 - 41K | 13 | 120-277v | 28 | 1650 | 126.9 | G5 | 4100 | 80 | 25 |
| LT5HE13B150K | LED 13W Ballast Bypass 4 Foot T8 - 50K | 13 | 120-277v | 28 | 1650 | 126.9 | G5 | 5000 | 80 | 25 |

| Item Number | Item Description | Bare Lamp Wattage | Equivalent Wattage | LBF System Wattage | NBF System Wattage | HBF System Wattage | LBF Lamp Lumens | NBF Lamp Lumens | HBF Lamp Lumens | Base | CCT | CRI |
|-------------|------------------|-------------------|--------------------|--------------------|--------------------|--------------------|-----------------|-----------------|-----------------|------|-----|-----|
|-------------|------------------|-------------------|--------------------|--------------------|--------------------|--------------------|-----------------|-----------------|-----------------|------|-----|-----|

### 50,000 HOUR LED DIRECT8™ INSTANT START COMPATIBLE

#### 12W LED T8 INSTANT START - 4 FOOT GLASS TUBES (DLC SEARCH "L12T8D50")

|             |                             |    |    |    |      |      |      |      |      |     |      |    |
|-------------|-----------------------------|----|----|----|------|------|------|------|------|-----|------|----|
| L12T8D5030K | LED 12W IS/RS 4 Ft T8 - 30K | 12 | 32 | 13 | 14.9 | 21.5 | 1260 | 1700 | 2280 | G13 | 3000 | 80 |
| L12T8D5035K | LED 12W IS/RS 4 Ft T8 - 35K | 12 | 32 | 13 | 14.9 | 21.5 | 1300 | 1750 | 2340 | G13 | 3500 | 80 |
| L12T8D5041K | LED 12W IS/RS 4 Ft T8 - 41K | 12 | 32 | 13 | 14.9 | 21.5 | 1340 | 1800 | 2400 | G13 | 4100 | 80 |
| L12T8D5050K | LED 12W IS/RS 4 Ft T8 - 50K | 12 | 32 | 13 | 14.9 | 21.5 | 1380 | 1850 | 2480 | G13 | 5000 | 80 |

#### 18W LED T8 INSTANT START - 4 FOOT GLASS TUBES (DLC SEARCH "T80433")

|           |                               |    |    |      |      |      |      |      |      |     |      |    |
|-----------|-------------------------------|----|----|------|------|------|------|------|------|-----|------|----|
| LT818A30K | LED 18W IS/RS 4 Foot T8 - 30K | 15 | 32 | 15.4 | 17.5 | 25.7 | 2000 | 2300 | 3380 | G13 | 3000 | 80 |
| LT818A35K | LED 18W IS/RS 4 Foot T8 - 35K | 15 | 32 | 15.4 | 17.5 | 25.7 | 2050 | 2350 | 3450 | G13 | 3500 | 80 |
| LT818A41K | LED 18W IS/RS 4 Foot T8 - 41K | 15 | 32 | 15.4 | 17.5 | 25.7 | 2050 | 2350 | 3450 | G13 | 4100 | 80 |
| LT818A50K | LED 18W IS/RS 4 Foot T8 - 50K | 15 | 32 | 15.4 | 17.5 | 25.7 | 2100 | 2400 | 3525 | G13 | 5000 | 80 |

#### 12W LED HIGH CRI T8 INSTANT START - 4 FOOT GLASS TUBES

|               |                                |    |    |      |      |      |      |      |      |     |      |    |
|---------------|--------------------------------|----|----|------|------|------|------|------|------|-----|------|----|
| L12T8D5027K95 | LED 12W IS/RS 4 Ft T8 - 27K 95 | 12 | 32 | 13   | 14.9 | 21.5 | 1300 | 1750 | 2340 | G13 | 2700 | 90 |
| L12T8D5030K95 | LED 12W IS/RS 4 Ft T8 - 30K 95 | 12 | 32 | 13   | 14.9 | 21.5 | 1340 | 1800 | 2400 | G13 | 3000 | 90 |
| L12T8D5035K95 | LED 12W IS/RS 4 Ft T8 - 35K 95 | 12 | 32 | 13   | 14.9 | 21.5 | 1340 | 1800 | 2400 | G13 | 3500 | 90 |
| L12T8D5041K95 | LED 12W IS/RS 4 Ft T8 - 41K 95 | 12 | 32 | 13   | 14.9 | 21.5 | 1360 | 1825 | 2425 | G13 | 4100 | 90 |
| L12T8D5050K95 | LED 12W IS/RS 4 Ft T8 - 50K 95 | 12 | 32 | 13   | 14.9 | 21.5 | 1380 | 1850 | 2480 | G13 | 5000 | 90 |
| T80414095P    | LED 12W IS/RS 4 Ft T8 - 41K95  | 12 | 32 | 12.5 | 15   | 21.5 | 1050 | 1400 | 1860 | G13 | 4100 | 90 |



Item Number

Item Description

Bare Lamp Wattage

Equivalent Wattage

LBF System Wattage

NBF System Wattage

HBF System Wattage

LBF Lamp Lumens

NBF Lamp Lumens

HBF Lamp Lumens

Base

CCT

CRI

**50,000 HOUR LED DIRECT8™ INSTANT START COMPATIBLE CONTINUED**
**9.5W LED HIGH OUTPUT T8 INSTANT START - 4 FOOT PET COATED GLASS TUBES**


| Item Number  | Item Description                     | Bare Lamp Wattage | Equivalent Wattage | LBF System Wattage | NBF System Wattage | HBF System Wattage | LBF Lamp Lumens | NBF Lamp Lumens | HBF Lamp Lumens | Base | CCT  | CRI |
|--------------|--------------------------------------|-------------------|--------------------|--------------------|--------------------|--------------------|-----------------|-----------------|-----------------|------|------|-----|
| LPT809H0A41K | LED 9.5W IS/RS 4 Ft T8 H0 A - 41K SC | 9.5               | 32                 | 11.5               | 13                 | 19                 | 1400            | 1900            | 2500            | G13  | 4100 | 80  |
| LPT809H0A50K | LED 9.5W IS/RS 4 Ft T8 H0 A - 50K SC | 9.5               | 32                 | 11.5               | 13                 | 19                 | 1450            | 2000            | 2600            | G13  | 5000 | 80  |

|              |                                      |     |    |      |    |    |      |      |      |     |      |    |
|--------------|--------------------------------------|-----|----|------|----|----|------|------|------|-----|------|----|
| LPT809H0A50K | LED 9.5W IS/RS 4 Ft T8 H0 A - 50K SC | 9.5 | 32 | 11.5 | 13 | 19 | 1450 | 2000 | 2600 | G13 | 5000 | 80 |
|--------------|--------------------------------------|-----|----|------|----|----|------|------|------|-----|------|----|

**11W T8 HIGH EFFICACY INSTANT START - 4 FOOT GLASS TUBES**

|             |                                           |    |    |      |      |      |      |      |      |     |      |    |
|-------------|-------------------------------------------|----|----|------|------|------|------|------|------|-----|------|----|
| L11T8D5030K | LED 11W High Efficacy IS/RS 4 Ft T8 - 30K | 11 | 32 | 11.3 | 13.6 | 18.5 | 1340 | 1800 | 2410 | G13 | 3000 | 80 |
|-------------|-------------------------------------------|----|----|------|------|------|------|------|------|-----|------|----|

|             |                                           |    |    |      |      |      |      |      |      |     |      |    |
|-------------|-------------------------------------------|----|----|------|------|------|------|------|------|-----|------|----|
| L11T8D5035K | LED 11W High Efficacy IS/RS 4 Ft T8 - 35K | 11 | 32 | 11.3 | 13.6 | 18.5 | 1380 | 1850 | 2480 | G13 | 3500 | 80 |
|-------------|-------------------------------------------|----|----|------|------|------|------|------|------|-----|------|----|

|             |                                           |    |    |      |      |      |      |      |      |     |      |    |
|-------------|-------------------------------------------|----|----|------|------|------|------|------|------|-----|------|----|
| L11T8D5041K | LED 11W High Efficacy IS/RS 4 Ft T8 - 41K | 11 | 32 | 11.3 | 13.6 | 18.5 | 1410 | 1900 | 2540 | G13 | 4100 | 80 |
|-------------|-------------------------------------------|----|----|------|------|------|------|------|------|-----|------|----|

|             |                                           |    |    |      |      |      |      |      |      |     |      |    |
|-------------|-------------------------------------------|----|----|------|------|------|------|------|------|-----|------|----|
| L11T8D5050K | LED 11W High Efficacy IS/RS 4 Ft T8 - 50K | 11 | 32 | 11.3 | 13.6 | 18.5 | 1450 | 1950 | 2610 | G13 | 5000 | 80 |
|-------------|-------------------------------------------|----|----|------|------|------|------|------|------|-----|------|----|

**10W T8 HIGH EFFICACY INSTANT START - 4 FOOT GLASS TUBES BULK PACKS (DLC SEARCH "T80430")**

|             |                                       |    |    |      |      |      |      |      |      |     |      |    |
|-------------|---------------------------------------|----|----|------|------|------|------|------|------|-----|------|----|
| T8043040EBP | LED 13W IS/RS 4 Ft T8 - 41K Bulk Pack | 10 | 32 | 11.6 | 13.2 | 19.4 | 1625 | 1850 | 2700 | G13 | 4100 | 80 |
|-------------|---------------------------------------|----|----|------|------|------|------|------|------|-----|------|----|

**11W T8 INSTANT START - 3 FOOT GLASS TUBES**

|              |                             |    |    |      |      |      |      |      |      |     |      |    |
|--------------|-----------------------------|----|----|------|------|------|------|------|------|-----|------|----|
| L11T83D5030K | LED 11W IS/RS 3 Ft T8 - 30K | 11 | 25 | 11.6 | 13.5 | 19.2 | 1040 | 1400 | 1870 | G13 | 3000 | 80 |
|--------------|-----------------------------|----|----|------|------|------|------|------|------|-----|------|----|

|              |                             |    |    |      |      |      |      |      |      |     |      |    |
|--------------|-----------------------------|----|----|------|------|------|------|------|------|-----|------|----|
| L11T83D5035K | LED 11W IS/RS 3 Ft T8 - 35K | 11 | 25 | 11.6 | 13.5 | 19.2 | 1080 | 1450 | 1940 | G13 | 3500 | 80 |
|--------------|-----------------------------|----|----|------|------|------|------|------|------|-----|------|----|

|              |                             |    |    |      |      |      |      |      |      |     |      |    |
|--------------|-----------------------------|----|----|------|------|------|------|------|------|-----|------|----|
| L11T83D5041K | LED 11W IS/RS 3 Ft T8 - 41K | 11 | 25 | 11.6 | 13.5 | 19.2 | 1110 | 1500 | 2000 | G13 | 4100 | 80 |
|--------------|-----------------------------|----|----|------|------|------|------|------|------|-----|------|----|

|              |                             |    |    |      |      |      |      |      |      |     |      |    |
|--------------|-----------------------------|----|----|------|------|------|------|------|------|-----|------|----|
| L11T83D5050K | LED 11W IS/RS 3 Ft T8 - 50K | 11 | 25 | 11.6 | 13.5 | 19.2 | 1150 | 1550 | 2070 | G13 | 5000 | 80 |
|--------------|-----------------------------|----|----|------|------|------|------|------|------|-----|------|----|

**9W T8 INSTANT START - 2 FOOT GLASS TUBES**

|            |                            |   |    |     |     |      |     |      |      |     |      |    |
|------------|----------------------------|---|----|-----|-----|------|-----|------|------|-----|------|----|
| L9T8D5030K | LED 9W IS/RS 2 Ft T8 - 30K | 9 | 17 | 8.5 | 9.5 | 14.2 | 850 | 1150 | 1540 | G13 | 3000 | 80 |
|------------|----------------------------|---|----|-----|-----|------|-----|------|------|-----|------|----|

|            |                            |   |    |     |     |      |     |      |      |     |      |    |
|------------|----------------------------|---|----|-----|-----|------|-----|------|------|-----|------|----|
| L9T8D5035K | LED 9W IS/RS 2 Ft T8 - 35K | 9 | 17 | 8.5 | 9.5 | 14.2 | 870 | 1175 | 1575 | G13 | 3500 | 80 |
|------------|----------------------------|---|----|-----|-----|------|-----|------|------|-----|------|----|

|            |                            |   |    |     |     |      |     |      |      |     |      |    |
|------------|----------------------------|---|----|-----|-----|------|-----|------|------|-----|------|----|
| L9T8D5041K | LED 9W IS/RS 2 Ft T8 - 41K | 9 | 17 | 8.5 | 9.5 | 14.2 | 890 | 1200 | 1600 | G13 | 4100 | 80 |
|------------|----------------------------|---|----|-----|-----|------|-----|------|------|-----|------|----|

|            |                            |   |    |     |     |      |     |      |      |     |      |    |
|------------|----------------------------|---|----|-----|-----|------|-----|------|------|-----|------|----|
| L9T8D5050K | LED 9W IS/RS 2 Ft T8 - 50K | 9 | 17 | 8.5 | 9.5 | 14.2 | 910 | 1225 | 1640 | G13 | 5000 | 80 |
|------------|----------------------------|---|----|-----|-----|------|-----|------|------|-----|------|----|

| Item Number | Item Description | Bare Lamp Wattage | Equivalent Wattage | LBF System Wattage | NBF System Wattage | HBF System Wattage | LBF Lamp Lumens | NBF Lamp Lumens | HBF Lamp Lumens | Base | CCT | CRI |
|-------------|------------------|-------------------|--------------------|--------------------|--------------------|--------------------|-----------------|-----------------|-----------------|------|-----|-----|
|-------------|------------------|-------------------|--------------------|--------------------|--------------------|--------------------|-----------------|-----------------|-----------------|------|-----|-----|

### 50,000 HOUR LED DIRECT8™ INSTANT START COMPATIBLE CONTINUED

#### 15W LED T8 INSTANT START BALLAST COMPATIBLE - 4 FOOT SHATTER PROOF TUBES BULK PACK (DLC SEARCH "LPT815A")

|              |                                            |    |    |    |    |      |      |      |      |     |      |    |
|--------------|--------------------------------------------|----|----|----|----|------|------|------|------|-----|------|----|
| LPT815A41KBP | LED 15W IS/RS SC 4 Foot T8 - 41K Bulk Pack | 15 | 32 | 15 | 18 | 21.5 | 1650 | 2100 | 2450 | G13 | 4100 | 80 |
|--------------|--------------------------------------------|----|----|----|----|------|------|------|------|-----|------|----|



#### 15W LED T8 INSTANT START/RAPID START BALLAST COMPATIBLE - 4 FOOT SHATTER PROOF GLASS TUBES

|               |                                |    |    |      |    |      |      |      |      |     |      |    |
|---------------|--------------------------------|----|----|------|----|------|------|------|------|-----|------|----|
| L15T8D5030KSC | LED 15W IS/RS SC 4 Ft T8 - 30K | 15 | 32 | 14.5 | 18 | 21.5 | 1600 | 2000 | 2350 | G13 | 3000 | 80 |
|---------------|--------------------------------|----|----|------|----|------|------|------|------|-----|------|----|

|               |                                |    |    |      |    |      |      |      |      |     |      |    |
|---------------|--------------------------------|----|----|------|----|------|------|------|------|-----|------|----|
| L15T8D5035KSC | LED 15W IS/RS SC 4 Ft T8 - 35K | 15 | 32 | 14.5 | 18 | 21.5 | 1600 | 2000 | 2350 | G13 | 3500 | 80 |
|---------------|--------------------------------|----|----|------|----|------|------|------|------|-----|------|----|

|               |                                |    |    |      |    |      |      |      |      |     |      |    |
|---------------|--------------------------------|----|----|------|----|------|------|------|------|-----|------|----|
| L15T8D5041KSC | LED 15W IS/RS SC 4 Ft T8 - 41K | 15 | 32 | 14.5 | 18 | 21.5 | 1650 | 2100 | 2450 | G13 | 4100 | 80 |
|---------------|--------------------------------|----|----|------|----|------|------|------|------|-----|------|----|

|               |                                |    |    |      |    |      |      |      |      |     |      |    |
|---------------|--------------------------------|----|----|------|----|------|------|------|------|-----|------|----|
| L15T8D5050KSC | LED 15W IS/RS SC 4 Ft T8 - 50K | 15 | 32 | 14.5 | 18 | 21.5 | 1700 | 2200 | 2500 | G13 | 5000 | 80 |
|---------------|--------------------------------|----|----|------|----|------|------|------|------|-----|------|----|



#### 12W LED T8 INSTANT START/PROGRAMMED START BALLAST COMPATIBLE - 4 FOOT ALL GLASS TUBES

|              |                             |    |    |    |      |      |      |      |      |     |      |    |
|--------------|-----------------------------|----|----|----|------|------|------|------|------|-----|------|----|
| L12T8PS5030K | LED 12W IS/PS 4 Ft T8 - 30K | 12 | 32 | 13 | 14.9 | 21.5 | 1260 | 1700 | 2280 | G13 | 3000 | 80 |
|--------------|-----------------------------|----|----|----|------|------|------|------|------|-----|------|----|

|              |                             |    |    |    |      |      |      |      |      |     |      |    |
|--------------|-----------------------------|----|----|----|------|------|------|------|------|-----|------|----|
| L12T8PS5035K | LED 12W IS/PS 4 Ft T8 - 35K | 12 | 32 | 13 | 14.9 | 21.5 | 1300 | 1750 | 2340 | G13 | 3500 | 80 |
|--------------|-----------------------------|----|----|----|------|------|------|------|------|-----|------|----|

|              |                             |    |    |    |      |      |      |      |      |     |      |    |
|--------------|-----------------------------|----|----|----|------|------|------|------|------|-----|------|----|
| L12T8PS5041K | LED 12W IS/PS 4 Ft T8 - 41K | 12 | 32 | 13 | 14.9 | 21.5 | 1340 | 1800 | 2400 | G13 | 4100 | 80 |
|--------------|-----------------------------|----|----|----|------|------|------|------|------|-----|------|----|

|              |                             |    |    |    |      |      |      |      |      |     |      |    |
|--------------|-----------------------------|----|----|----|------|------|------|------|------|-----|------|----|
| L12T8PS5050K | LED 12W IS/PS 4 Ft T8 - 50K | 12 | 32 | 13 | 14.9 | 21.5 | 1380 | 1850 | 2480 | G13 | 5000 | 80 |
|--------------|-----------------------------|----|----|----|------|------|------|------|------|-----|------|----|

#### 13W LED U-BEND T8 INSTANT START/RAPID START BALLAST COMPATIBLE - 6 INCH PLASTIC

|              |                                |    |    |    |    |    |      |      |      |      |      |    |
|--------------|--------------------------------|----|----|----|----|----|------|------|------|------|------|----|
| L13T8UD5030K | LED 13W U6 IS/RS 4 Ft T8 - 30K | 13 | 32 | 13 | 16 | 22 | 1400 | 1800 | 2500 | 2G13 | 3000 | 83 |
|--------------|--------------------------------|----|----|----|----|----|------|------|------|------|------|----|

|              |                                |    |    |    |    |    |      |      |      |      |      |    |
|--------------|--------------------------------|----|----|----|----|----|------|------|------|------|------|----|
| L13T8UD5035K | LED 13W U6 IS/RS 4 Ft T8 - 35K | 13 | 32 | 13 | 16 | 22 | 1400 | 1800 | 2500 | 2G13 | 3500 | 83 |
|--------------|--------------------------------|----|----|----|----|----|------|------|------|------|------|----|

|              |                                |    |    |    |    |    |      |      |      |      |      |    |
|--------------|--------------------------------|----|----|----|----|----|------|------|------|------|------|----|
| L13T8UD5041K | LED 13W U6 IS/RS 4 Ft T8 - 41K | 13 | 32 | 13 | 16 | 22 | 1450 | 1850 | 2550 | 2G13 | 4100 | 83 |
|--------------|--------------------------------|----|----|----|----|----|------|------|------|------|------|----|

|              |                                |    |    |    |    |    |      |      |      |      |      |    |
|--------------|--------------------------------|----|----|----|----|----|------|------|------|------|------|----|
| L13T8UD5050K | LED 13W U6 IS/RS 4 Ft T8 - 50K | 13 | 32 | 13 | 16 | 22 | 1500 | 1900 | 2600 | 2G13 | 5000 | 83 |
|--------------|--------------------------------|----|----|----|----|----|------|------|------|------|------|----|





| Item Number | Item Description | Lamp Wattage | Equivalent Wattage | System Wattage | Lamp Lumens | Lumens Per Watt | Base | CCT | CRI |
|-------------|------------------|--------------|--------------------|----------------|-------------|-----------------|------|-----|-----|
|-------------|------------------|--------------|--------------------|----------------|-------------|-----------------|------|-----|-----|

#### 50,000 HOUR LED DIRECT5™ ELECTRONIC BALLAST COMPATIBLE

#### 25.5W LED T5 ELECTRONIC BALLAST COMPATIBLE - 4 FOOT SHATTERPROOF GLASS TUBES

Direct5™  
LED



|                                                                            |                                |      |    |    |      |       |    |      |    |
|----------------------------------------------------------------------------|--------------------------------|------|----|----|------|-------|----|------|----|
| L25T5D5030K                                                                | LED 25W IS/RS SC 4 Ft T5 - 30K | 25.5 | 54 | 28 | 3150 | 123.5 | G5 | 3000 | 83 |
| L25T5D5035K                                                                | LED 25W IS/RS SC 4 Ft T5 - 35K | 25.5 | 54 | 28 | 3150 | 123.5 | G5 | 3500 | 83 |
| L25T5D5041K                                                                | LED 25W IS/RS SC 4 Ft T5 - 41K | 25.5 | 54 | 28 | 3190 | 125.1 | G5 | 4100 | 83 |
| L25T5D5050K                                                                | LED 25W IS/RS SC 4 Ft T5 - 50K | 25.5 | 54 | 28 | 3280 | 128.6 | G5 | 5000 | 83 |
| 13W LED T5 ELECTRONIC BALLAST COMPATIBLE - 4 FOOT SHATTERPROOF GLASS TUBES |                                |      |    |    |      |       |    |      |    |
| L13T5D5030K                                                                | LED 25W IS/RS SC 4 Ft T5 - 30K | 13   | 28 | 16 | 1800 | 138.5 | G5 | 3000 | 83 |
| L13T5D5035K                                                                | LED 25W IS/RS SC 4 Ft T5 - 35K | 13   | 28 | 16 | 1800 | 138.5 | G5 | 3500 | 83 |
| L13T5D5041K                                                                | LED 25W IS/RS SC 4 Ft T5 - 41K | 13   | 28 | 16 | 1850 | 142.3 | G5 | 4100 | 83 |
| L13T5D5050K                                                                | LED 25W IS/RS SC 4 Ft T5 - 50K | 13   | 28 | 16 | 1900 | 146.2 | G5 | 5000 | 83 |

| Item Number | DLC Model # | Item Description | Line Voltage Wattage | Line Voltage Lumens | Line Voltage LPW | LBF System Wattage | NBF System Wattage | LBF Lamp Lumens | NBF Lamp Lumens | NBF System LPW | PF | CCT | CRI |
|-------------|-------------|------------------|----------------------|---------------------|------------------|--------------------|--------------------|-----------------|-----------------|----------------|----|-----|-----|
|-------------|-------------|------------------|----------------------|---------------------|------------------|--------------------|--------------------|-----------------|-----------------|----------------|----|-----|-----|

#### 50,000 HOUR LED T8 TYPE AB TUBES - BALLAST AND LINE VOLTAGE COMPATIBLE

#### 15W LED T8 - 4 FOOT GLASS TUBES



|                                                 |            |                             |    |      |       |      |      |      |      |       |     |      |     |
|-------------------------------------------------|------------|-----------------------------|----|------|-------|------|------|------|------|-------|-----|------|-----|
| LT815AB30K                                      | T80407030E | LED 15W 4Ft T8 AB - 30K     | 16 | 1750 | 109.4 | 13.6 | 15.3 | 1550 | 1760 | 115   | >.9 | 3000 | >80 |
| LT815AB35K                                      | T80407035E | LED 15W 4Ft T8 AB - 35K     | 16 | 1800 | 112.5 | 13.6 | 15.3 | 1550 | 1760 | 115   | >.9 | 3500 | >80 |
| LT815AB41K                                      | T80407040E | LED 15W 4Ft T8 AB - 41K     | 16 | 1800 | 112.5 | 13.6 | 15.3 | 1590 | 1800 | 117.6 | >.9 | 4100 | >80 |
| LT815AB50K                                      | T80407050E | LED 15W 4Ft T8 AB - 50K     | 16 | 1800 | 112.5 | 13.6 | 15.3 | 1590 | 1800 | 117.6 | >.9 | 5000 | >80 |
| 15.5W LED T8 - 4 FOOT SHATTERPROOF COATED TUBES |            |                             |    |      |       |      |      |      |      |       |     |      |     |
| LPT815AB30K                                     | T8041430E  | LED 15.5W 4Ft T8 AB PL -30K | 16 | 1750 | 109.4 | 13.6 | 15.3 | 1550 | 1760 | 115   | >.9 | 3000 | >80 |
| LPT815AB35K                                     | T8041435E  | LED 15.5W 4Ft T8 AB PL -35K | 16 | 1750 | 109.4 | 13.6 | 15.3 | 1550 | 1760 | 115   | >.9 | 3500 | >80 |
| LPT815AB41K                                     | T8041440E  | LED 15.5W 4Ft T8 AB PL -41K | 16 | 1800 | 112.5 | 13.6 | 15.3 | 1590 | 1800 | 117.6 | >.9 | 4100 | >80 |
| LPT815AB50K                                     | T8041450E  | LED 15.5W 4Ft T8 AB PL -50K | 16 | 1850 | 115.6 | 13.6 | 15.3 | 1620 | 1850 | 120.9 | >.9 | 5000 | >80 |

T8 AB Type lamps are double ended for safety.

86



5 YEAR  
WARRANTY

Consult [www.tcp.com](http://www.tcp.com) for warranty information.

| Item Number                                                                     | Item Description | Lamp Wattage | System Wattage | Voltage | Fluorescent Equivalency | Lumens                         | Lumens Per Watt | Base | CCT | CRI | Master Pack |
|---------------------------------------------------------------------------------|------------------|--------------|----------------|---------|-------------------------|--------------------------------|-----------------|------|-----|-----|-------------|
| <b>50,000 HOUR LED T8 4 FOOT TYPE C TUBES</b>                                   |                  |              |                |         |                         |                                |                 |      |     |     |             |
| <b>12W T8 Type C - 4 Foot SINGLE END WIRED PET COATED GLASS TUBES, G13 BASE</b> |                  |              |                |         |                         | <b>DLC Look Up# T80457CXXK</b> |                 |      |     |     |             |

|           |                                |    |    |          |    |      |     |     |      |     |    |
|-----------|--------------------------------|----|----|----------|----|------|-----|-----|------|-----|----|
| LT812C35K | LED 12W Type C 4 Foot T8 - 35K | 12 | 12 | 120-277v | 32 | 1800 | 150 | G13 | 3500 | >80 | 25 |
| LT812C40K | LED 12W Type C 4 Foot T8 - 40K | 12 | 12 | 120-277v | 32 | 1800 | 150 | G13 | 4100 | >80 | 25 |
| LT812C50K | LED 12W Type C 4 Foot T8 - 50K | 12 | 12 | 120-277v | 32 | 1800 | 150 | G13 | 5000 | >80 | 25 |



| <b>DRIVER SPECIFICATIONS, 0-10V DIMMABLE</b> |                                 |   |            |          |   |      |     |   |   |   |    |
|----------------------------------------------|---------------------------------|---|------------|----------|---|------|-----|---|---|---|----|
| LDT8212C                                     | LED Type C T8 4Ft 2 Lamp Driver | - | 30, 45, 60 | 120-277v | - | 3600 | 138 | - | - | - | 25 |
| LDT8312C                                     | LED Type C T8 4Ft 3 Lamp Driver | - | 30, 45, 60 | 120-277v | - | 5400 | 138 | - | - | - | 25 |
| LDT8412C                                     | LED Type C T8 4Ft 4 Lamp Driver | - | 30, 45, 60 | 120-277v | - | 7200 | 138 | - | - | - | 25 |

|                                                                                          |  |  |  |  |  |                                   |  |  |  |  |  |
|------------------------------------------------------------------------------------------|--|--|--|--|--|-----------------------------------|--|--|--|--|--|
| <b>50,000 HOUR LED T5 4 FOOT TYPE C TUBES - ITEMS HO</b>                                 |  |  |  |  |  |                                   |  |  |  |  |  |
| <b>22W T5 Type C - 4 Foot DOUBLE OR SINGLE END WIRED PET COATED GLASS TUBES, G5 BASE</b> |  |  |  |  |  | <b>DLC Look Up# LT5H0100C4XXK</b> |  |  |  |  |  |

|             |                                |    |    |          |    |      |       |    |      |     |    |
|-------------|--------------------------------|----|----|----------|----|------|-------|----|------|-----|----|
| LT5H025C35K | LED 22W Type C 4 Foot T5 - 35K | 22 | 25 | 120-277v | 54 | 3200 | 145.5 | G5 | 3500 | >80 | 25 |
| LT5H025C40K | LED 22W Type C 4 Foot T5 - 40K | 22 | 25 | 120-277v | 54 | 3300 | 150   | G5 | 4100 | >80 | 25 |
| LT5H025C50K | LED 22W Type C 4 Foot T5 - 50K | 22 | 25 | 120-277v | 54 | 3400 | 154.5 | G5 | 5000 | >80 | 25 |



| <b>DRIVER SPECIFICATIONS, 0-10V DIMMABLE</b> |                                    |   |     |          |   |                     |     |   |   |   |    |
|----------------------------------------------|------------------------------------|---|-----|----------|---|---------------------|-----|---|---|---|----|
| LDT5H0225C                                   | LED Type C T5 4Ft 2 Lamp HO Driver | - | 50  | 120-277v | - | 6400, 6600, 6800    | 136 | - | - | - | 25 |
| LDT5H0425C                                   | LED Type C T5 4Ft 3 Lamp HO Driver | - | 100 | 120-277v | - | 12800, 13200, 13600 | 136 | - | - | - | 25 |

|                                                                                |  |  |  |  |  |                                                |  |  |  |  |  |
|--------------------------------------------------------------------------------|--|--|--|--|--|------------------------------------------------|--|--|--|--|--|
| <b>50,000 HOUR LED T5 4 FOOT TYPE C TUBES - ITEMS HE</b>                       |  |  |  |  |  |                                                |  |  |  |  |  |
| <b>12W T5 Type C - 4 Foot SINGLE END WIRED PET COATED GLASS TUBES, G5 BASE</b> |  |  |  |  |  | <b>DLC Look Up# LT5HE26C2XXK/ LT5HE52C4XXK</b> |  |  |  |  |  |

|             |                                   |    |    |          |    |      |       |    |      |     |    |
|-------------|-----------------------------------|----|----|----------|----|------|-------|----|------|-----|----|
| LT5HE13C35K | LED 12W Type C HE 4 Foot T5 - 35K | 12 | 13 | 120-277v | 26 | 1700 | 141.7 | G5 | 3500 | >80 | 25 |
| LT5HE13C40K | LED 12W Type C HE 4 Foot T5 - 40K | 12 | 13 | 120-277v | 26 | 1750 | 145.8 | G5 | 4100 | >80 | 25 |
| LT5HE13C50K | LED 12W Type C HE 4 Foot T5 - 50K | 12 | 13 | 120-277v | 26 | 1800 | 150   | G5 | 5000 | >80 | 25 |



| <b>DRIVER SPECIFICATIONS, 0-10V DIMMABLE</b> |                                    |   |    |          |   |                  |     |   |   |   |    |
|----------------------------------------------|------------------------------------|---|----|----------|---|------------------|-----|---|---|---|----|
| LDT5HE213C                                   | LED Type C T5 4Ft 2 Lamp HE Driver | - | 26 | 120-277v | - | 3400, 3500, 3600 | 138 | - | - | - | 25 |
| LDT5HE413C                                   | LED Type C T5 4Ft 3 Lamp HE Driver | - | 52 | 120-277v | - | 6800, 7000, 7200 | 138 | - | - | - | 25 |



| Item Number | Item Description | Line Voltage Wattage | Line Voltage Wattage | Line Voltage LPW | Lamp Wattage | Equivalency Wattage | NBF System Wattage | NBF System Lumens | NBF System LPW | Base | CCT | Voltage | CRI |
|-------------|------------------|----------------------|----------------------|------------------|--------------|---------------------|--------------------|-------------------|----------------|------|-----|---------|-----|
|-------------|------------------|----------------------|----------------------|------------------|--------------|---------------------|--------------------|-------------------|----------------|------|-----|---------|-----|

### 50,000 HOUR LED PROLINE INSTANT START COMPATIBLE T8 TUBES - TYPE A

#### 15W T8 PROLINE INSTANT START - 4 FOOT GLASS TUBES



|              |                                  |   |   |   |    |    |    |      |       |     |      |         |    |
|--------------|----------------------------------|---|---|---|----|----|----|------|-------|-----|------|---------|----|
| LS4T815IS41K | LED 15W Proline IS 4 Ft T8 - 41K | - | - | - | 15 | 32 | 17 | 1800 | 105.8 | G13 | 4100 | 120-277 | 80 |
| LS4T815IS50K | LED 15W Proline IS 4 Ft T8 - 50K | - | - | - | 15 | 32 | 17 | 1800 | 105.8 | G13 | 5000 | 120-277 | 80 |

#### 15W T8 PROLINE INSTANT START - 4 FOOT U-BEND PLASTIC TUBES



|               |                                     |   |   |   |    |    |    |      |     |     |      |         |    |
|---------------|-------------------------------------|---|---|---|----|----|----|------|-----|-----|------|---------|----|
| LSU6T815IS41K | LED 15W Proline IS 4 Ft U6 T8 - 41K | - | - | - | 15 | 32 | 17 | 1800 | 100 | G13 | 4100 | 120-277 | 80 |
| LSU6T815IS50K | LED 15W Proline IS 4 Ft U6 T8 - 50K | - | - | - | 15 | 32 | 17 | 1800 | 100 | G13 | 5000 | 120-277 | 80 |

### 50,000 HOUR LED PROLINE BYPASS T8 TUBES - TYPE B

#### 14W T8 PROLINE 2E BYPASS - 4 FOOT GLASS TUBES



|              |                                         |    |      |       |   |    |   |   |   |     |      |         |    |
|--------------|-----------------------------------------|----|------|-------|---|----|---|---|---|-----|------|---------|----|
| LS4T814B241K | LED 14W Proline 2E Bypass 4 Ft T8 - 41K | 14 | 1800 | 128.6 | - | 32 | - | - | - | G13 | 4100 | 120-277 | 80 |
| LS4T814B250K | LED 14W Proline 2E Bypass 4 Ft T8 - 50K | 14 | 1800 | 128.6 | - | 32 | - | - | - | G13 | 5000 | 120-277 | 80 |

### 50,000 HOUR LED PROLINE T8 TUBES - TYPE AB

COMING SOON

#### 15W T8 PROLINE TYPE AB - 4 FOOT GLASS TUBES



|              |                           |   |   |   |   |    |   |   |   |     |      |         |    |
|--------------|---------------------------|---|---|---|---|----|---|---|---|-----|------|---------|----|
| LS4T816AB41K | LED 16W AB2 4 Ft T8 - 41K | - | - | - | - | 32 | - | - | - | G13 | 4100 | 120-277 | 80 |
|--------------|---------------------------|---|---|---|---|----|---|---|---|-----|------|---------|----|

| Item Number                        | Item Description                                     | Voltage  | Lamp Count | Lamp Type | Options   |
|------------------------------------|------------------------------------------------------|----------|------------|-----------|-----------|
| <b>LED T8 READY ELITE HIGH BAY</b> |                                                      |          |            |           |           |
| EL4WA4LT8B1                        | Elite, 4 Lamp T8, Universal, Single End, Non-Dimming | 120-277V | 4          | T8        | see below |
| EL4WA4LT8B2                        | Elite, 4 Lamp T8, Universal, Double End, Non-Dimming | 120-277V | 4          | T8        |           |
| EL4WA6LT8B1                        | Elite, 6 Lamp T8, Universal, Single End, Non-Dimming | 120-277V | 6          | T8        |           |
| EL4WA6LT8B2                        | Elite, 6 Lamp T8, Universal, Double End, Non-Dimming | 120-277V | 6          | T8        |           |
| EL4WA8LT8B1                        | Elite, 8 Lamp T8, Universal, Single End, Non-Dimming | 120-277V | 8          | T8        |           |
| EL4WA8LT8B2                        | Elite, 8 Lamp T8, Universal, Double End, Non-Dimming | 120-277V | 8          | T8        |           |



**AVAILABLE ACCESSORIES (ordered separately; sensors can be installed at factory):**

**LS1** – Leviton PIR Occupancy Sensor w/bracket and interchangeable lenses, 40' or less, 120V, 277V or 347V

**10C** – 10' Power Cord 277V SJTooW No Plug

**AVAILABLE HANGING KITS):**

**EZHANGER** – 15' adjustable aircraft cable hanging kit (ordered separately)

| Item Number                       | Item Description                                            | Voltage  | LED Strip Count | Strip Length | Controls      | Wattage | Color Temperature |
|-----------------------------------|-------------------------------------------------------------|----------|-----------------|--------------|---------------|---------|-------------------|
| <b>LED MAGNETIC RETROFIT KITS</b> |                                                             |          |                 |              |               |         |                   |
| RK12D1641K                        | LED Retrofit Kit, 1 21" strip, 0-10V Dimming, 16 Watts, 41K | 120-277V | 1               | 21           | 0-10V Dimming | 16      | 41K               |
| RK12D1650K                        | LED Retrofit Kit, 1 21" strip, 0-10V Dimming, 16 Watts, 50K | 120-277V | 1               | 21           | 0-10V Dimming | 16      | 50K               |
| RK22D1641K                        | LED Retrofit Kit, 2 21" strip, 0-10V Dimming, 16 Watts, 41K | 120-277V | 2               | 21           | 0-10V Dimming | 16      | 41K               |
| RK22D1650K                        | LED Retrofit Kit, 2 21" strip, 0-10V Dimming, 16 Watts, 50K | 120-277V | 2               | 21           | 0-10V Dimming | 16      | 50K               |
| RK12D3241K                        | LED Retrofit Kit, 1 21" strip, 0-10V Dimming, 32Watts, 41K  | 120-277V | 1               | 21           | 0-10V Dimming | 32      | 41K               |
| RK12D3250K                        | LED Retrofit Kit, 1 21" strip, 0-10V Dimming, 32 Watts, 50K | 120-277V | 1               | 21           | 0-10V Dimming | 32      | 50K               |
| RK22D3241K                        | LED Retrofit Kit, 2 21" strip, 0-10V Dimming, 32 Watts, 41K | 120-277V | 2               | 21           | 0-10V Dimming | 32      | 41K               |
| RK22D3250K                        | LED Retrofit Kit, 2 21" strip, 0-10V Dimming, 32 Watts, 50K | 120-277V | 2               | 21           | 0-10V Dimming | 32      | 50K               |
| RK14D1641K                        | LED Retrofit Kit, 1 42" strip, 0-10V Dimming, 16 Watts, 41K | 120-277V | 1               | 42           | 0-10V Dimming | 16      | 41K               |
| RK14D1650K                        | LED Retrofit Kit, 1 42" strip, 0-10V Dimming, 16 Watts, 50K | 120-277V | 1               | 42           | 0-10V Dimming | 16      | 50K               |
| RK24D1641K                        | LED Retrofit Kit, 2 42" strip, 0-10V Dimming, 16 Watts, 41K | 120-277V | 2               | 42           | 0-10V Dimming | 16      | 41K               |
| RK24D1650K                        | LED Retrofit Kit, 2 42" strip, 0-10V Dimming, 16 Watts, 50K | 120-277V | 2               | 42           | 0-10V Dimming | 16      | 50K               |
| RK14D3241K                        | LED Retrofit Kit, 1 42" strip, 0-10V Dimming, 32 Watts, 41K | 120-277V | 1               | 42           | 0-10V Dimming | 32      | 41K               |
| RK14D3250K                        | LED Retrofit Kit, 1 42" strip, 0-10V Dimming, 32 Watts, 50K | 120-277V | 1               | 42           | 0-10V Dimming | 32      | 50K               |
| RK24D3241K                        | LED Retrofit Kit, 2 42" strip, 0-10V Dimming, 32 Watts, 41K | 120-277V | 2               | 42           | 0-10V Dimming | 32      | 41K               |
| RK24D3250K                        | LED Retrofit Kit, 2 42" strip, 0-10V Dimming, 32 Watts, 50K | 120-277V | 2               | 42           | 0-10V Dimming | 32      | 50K               |



# CFL LAMPS

TCP carries fluorescent spring lamps, circlines and GU 24 bulbs. Our compact fluorescent products can be used anywhere a standard incandescent is used including in table lamps, recessed downlighting, wall sconces, ceiling fixtures and ceiling fans.



| Item Number                                             | Item Description               | Unit/Ballast Watts | Incandescent Comparison (Watts) | Initial Lumens | CCT (Kelvin) | CRI | MOL/Height (inches) | Diameter/Width (inches) | Base Type | Case Quantity |
|---------------------------------------------------------|--------------------------------|--------------------|---------------------------------|----------------|--------------|-----|---------------------|-------------------------|-----------|---------------|
| <b>12,000 HOUR CFL PRO SERIES</b>                       |                                |                    |                                 |                |              |     |                     |                         |           |               |
| <b>TCP PRO SERIES T3 FULL SPRINGLAMPS®, NPF</b>         |                                |                    |                                 |                |              |     |                     |                         |           |               |
| 48909                                                   | 9 Watt Full SpringLamp         | 9                  | 40W                             | 600            | 2700         | 82  | 3.6                 | 1.8                     | E26       | 12            |
| 48913                                                   | 13 Watt Full SpringLamp        | 13                 | 60W                             | 925            | 2700         | 82  | 3.9                 | 1.8                     | E26       | 12            |
| 48913C                                                  | 13 Watt Full SpringLamp, E12   | 13                 | 60W                             | 925            | 2700         | 82  | 3.8                 | 1.8                     | E12       | 12            |
| 48918                                                   | 18 Watt Full SpringLamp        | 18                 | 75W                             | 1300           | 2700         | 82  | 4.0                 | 2.4                     | E26       | 12            |
| 48923                                                   | 23 Watt Full SpringLamp        | 23                 | 100W                            | 1650           | 2700         | 82  | 4.4                 | 2.4                     | E26       | 12            |
| 48927                                                   | 27 Watt Full SpringLamp        | 27                 | 100W                            | 1850           | 2700         | 82  | 5.1                 | 2.4                     | E26       | 12            |
| 48932                                                   | 32 Watt Full SpringLamp        | 32                 | 125W                            | 2150           | 2700         | 82  | 5.1                 | 2.7                     | E26       | 12            |
| 48942                                                   | 42 Watt Full SpringLamp        | 42                 | 150W                            | 2850           | 2700         | 82  | 5.7                 | 2.7                     | E26       | 12            |
| <b>TCP PRO SERIES T2 FULL SPRINGLAMPS®, NPF</b>         |                                |                    |                                 |                |              |     |                     |                         |           |               |
| 4T213                                                   | 13 Watt T2 Full SpringLamp     | 13                 | 60W                             | 825            | 2700         | 82  | 3.6                 | 1.5                     | E26       | 12            |
| 4T213C                                                  | 13 Watt T2 Full SpringLamp E12 | 13                 | 60W                             | 825            | 2700         | 82  | 3.5                 | 1.5                     | E12       | 12            |
| <b>10,000 HOUR E26 BASE AND MOGUL BASE SPRINGLAMPS®</b> |                                |                    |                                 |                |              |     |                     |                         |           |               |
| <b>SPRINGLAMPS®, ELECTRONIC, NPF, &lt;150% THD</b>      |                                |                    |                                 |                |              |     |                     |                         |           |               |
| 28968                                                   | 68 Watt SpringLamp             | 68                 | 300W                            | 4200           | 2700         | 82  | 9.5                 | 4.1                     | E26       | 6             |



|                                                                                     |                | Item Number | Item Description       | Unit/Ballast Watts | Incandescent Comparison (Watts) | Initial Lumens | CCT (Kelvin) | CRI | MOL/Height (inches) | Diameter/Width (inches) | Base Type | Case Quantity |
|-------------------------------------------------------------------------------------|----------------|-------------|------------------------|--------------------|---------------------------------|----------------|--------------|-----|---------------------|-------------------------|-----------|---------------|
| <b>10,000 HOUR SPRINGLIGHT™</b>                                                     |                |             |                        |                    |                                 |                |              |     |                     |                         |           |               |
| <b>SPRINGLIGHT™ SPRINGLAMP®</b>                                                     |                |             |                        |                    |                                 |                |              |     |                     |                         |           |               |
|    | 9w SpringLamp  | 801009      | 9W SpringLamp 27K      | 9                  | 40                              | 550            | 2700         | 82  | 4.0                 | 1.8                     | E26       | 12            |
|                                                                                     |                | 80100941    | 9W SpringLamp 41K      | 9                  | 40                              | 550            | 4100         | 82  | 4.0                 | 1.8                     | E26       | 12            |
|                                                                                     |                | 80100950    | 9W SpringLamp 50K      | 9                  | 40                              | 500            | 5000         | 82  | 4.0                 | 1.8                     | E26       | 12            |
|                                                                                     |                | 801014      | 14W SpringLamp 27K     | 14                 | 60                              | 900            | 2700         | 82  | 4.4                 | 1.8                     | E26       | 12            |
|                                                                                     |                | 8010143     | 14W SpringLamp 27K 3PK | 14                 | 60                              | 900            | 2700         | 82  | 4.4                 | 1.8                     | E26       | 12            |
|    | 14w SpringLamp | 80101435    | 14W SpringLamp 35K     | 14                 | 60                              | 900            | 3500         | 82  | 4.4                 | 1.8                     | E26       | 12            |
|                                                                                     |                | 80101441    | 14W SpringLamp 41K     | 14                 | 60                              | 900            | 4100         | 82  | 4.4                 | 1.8                     | E26       | 12            |
|                                                                                     |                | 801014413   | 14W SpringLamp 41K 3PK | 14                 | 60                              | 900            | 4100         | 82  | 4.4                 | 1.8                     | E26       | 12            |
|                                                                                     |                | 80101450    | 14W SpringLamp 50K     | 14                 | 60                              | 850            | 5000         | 82  | 4.4                 | 1.8                     | E26       | 12            |
|                                                                                     |                | 80101465    | 14W SpringLamp 65K     | 14                 | 60                              | 850            | 6500         | 82  | 4.4                 | 1.8                     | E26       | 12            |
|  | 19w SpringLamp | 801019      | 19W SpringLamp 27K     | 19                 | 75                              | 1225           | 2700         | 82  | 4.4                 | 2.3                     | E26       | 12            |
|                                                                                     |                | 8010193     | 19W SpringLamp 27K 3PK | 19                 | 75                              | 1225           | 2700         | 82  | 4.4                 | 2.3                     | E26       | 12            |
|                                                                                     |                | 80101935    | 19W SpringLamp 35K     | 19                 | 75                              | 1225           | 3500         | 82  | 4.4                 | 2.3                     | E26       | 12            |
|                                                                                     |                | 80101941    | 19W SpringLamp 41K     | 19                 | 75                              | 1225           | 4100         | 82  | 4.4                 | 2.3                     | E26       | 12            |
|                                                                                     |                | 80101950    | 19W SpringLamp 50K     | 19                 | 75                              | 1225           | 5000         | 82  | 4.4                 | 2.3                     | E26       | 12            |
|  | 23w SpringLamp | 80101965    | 19W SpringLamp 65K     | 19                 | 75                              | 1225           | 6500         | 82  | 4.4                 | 2.3                     | E26       | 12            |
|                                                                                     |                | 801023      | 23W SpringLamp 27K     | 23                 | 100                             | 1600           | 2700         | 82  | 4.8                 | 2.3                     | E26       | 12            |
|                                                                                     |                | 8010233     | 23W SpringLamp 27K 3PK | 23                 | 100                             | 1600           | 2700         | 82  | 4.8                 | 2.3                     | E26       | 12            |
|                                                                                     |                | 80102335    | 23W SpringLamp 35K     | 23                 | 100                             | 1600           | 3500         | 82  | 4.8                 | 2.3                     | E26       | 12            |
|                                                                                     |                | 80102341    | 23W SpringLamp 41K     | 23                 | 100                             | 1600           | 4100         | 82  | 4.8                 | 2.3                     | E26       | 12            |
|  | 27w SpringLamp | 80102350    | 23W SpringLamp 50K     | 23                 | 100                             | 1500           | 5000         | 82  | 4.8                 | 2.3                     | E26       | 12            |
|                                                                                     |                | 80102365    | 23W SpringLamp 65K     | 23                 | 100                             | 1500           | 6500         | 82  | 4.8                 | 2.3                     | E26       | 12            |
|                                                                                     |                | 801027      | 27W SpringLamp 27K     | 27                 | 100                             | 1750           | 2700         | 82  | 5.5                 | 2.4                     | E26       | 12            |
|                                                                                     |                | 80102735    | 27W SpringLamp 35K     | 27                 | 100                             | 1750           | 3500         | 82  | 5.5                 | 2.4                     | E26       | 12            |
|                                                                                     |                | 80102741    | 27W SpringLamp 41K     | 27                 | 100                             | 1750           | 4100         | 82  | 5.5                 | 2.4                     | E26       | 12            |
|                                                                                     |                | 80102750    | 27W SpringLamp 50K     | 27                 | 100                             | 1750           | 5000         | 82  | 5.5                 | 2.4                     | E26       | 12            |

## SpringLight™ WARRANTY

### 801 Series – 10,000 hours – 9 Years – LIMITED WARRANTY\*

This product is warranted for a period of 9 YEARS\* from date of original purchase against defects in materials and workmanship. If this product should fail to operate due to defects in material or workmanship, simply call 1-800-771-9335 within WARRANTED TIME of purchase. This product will be repaired or replaced, at TCP's option. This warranty is expressly limited to repair or replacement of the product. This warranty gives the consumer specific legal rights, which vary from state to state. WARRANTY IS VOID IF PRODUCT IS NOT USED FOR THE PURPOSE FOR WHICH THIS PRODUCT IS MANUFACTURED.

Contact Customer Service for inventory availability and special orders.

\*Based on 3 hours average use per day

Consult [tcp.com](http://tcp.com) for the latest warranty & specification information.

| Item Number                     | Item Description | Unit/Ballast Watts | Lamp Watts | Incandescent Comparison (Watts) | Initial Lumens | CCT (Kelvin) | CRI | MOL/Height (inches) | Diameter/Width (inches) | Replacement Bracket | Replacement Lamp | Base Type | Replacement Ballast | Case Quantity |
|---------------------------------|------------------|--------------------|------------|---------------------------------|----------------|--------------|-----|---------------------|-------------------------|---------------------|------------------|-----------|---------------------|---------------|
| <b>10,000 HOUR CIRCLINE</b>     |                  |                    |            |                                 |                |              |     |                     |                         |                     |                  |           |                     |               |
| <b>T6 CIRCLINE LAMPS, 2700K</b> |                  |                    |            |                                 |                |              |     |                     |                         |                     |                  |           |                     |               |

|       |                       |    |    |     |      |      |    |     |     |        |     |     |     |    |
|-------|-----------------------|----|----|-----|------|------|----|-----|-----|--------|-----|-----|-----|----|
| 32027 | 27 Watt Circline Lamp | NA | 27 | 120 | 2000 | 2700 | 82 | 0.8 | 7.5 | 13827B | N/A | N/A | N/A | 20 |
| 32032 | 32 Watt Circline Lamp | NA | 32 | 130 | 2200 | 2700 | 82 | 0.8 | 9.0 | 13832B | N/A | N/A | N/A | 20 |
| 32040 | 40 Watt Circline Lamp | NA | 40 | 150 | 2800 | 2700 | 82 | 0.8 | 7.5 | 13818B | N/A | N/A | N/A | 20 |



|                                 |                       |    |    |     |      |      |    |     |     |        |     |     |     |    |
|---------------------------------|-----------------------|----|----|-----|------|------|----|-----|-----|--------|-----|-----|-----|----|
| <b>T9 CIRCLINE LAMPS, 2700K</b> |                       |    |    |     |      |      |    |     |     |        |     |     |     |    |
| 32030                           | 30 Watt Circline Lamp | NA | 30 | 120 | 2000 | 2700 | NA | 1.0 | 9.0 | 13830B | N/A | N/A | N/A | 20 |



|                               |                          |    |    |    |    |    |    |    |    |    |     |     |     |    |
|-------------------------------|--------------------------|----|----|----|----|----|----|----|----|----|-----|-----|-----|----|
| <b>CIRCLINE BALLASTS, NPF</b> |                          |    |    |    |    |    |    |    |    |    |     |     |     |    |
| 17030                         | 30 Watt Circline Ballast | 30 | NA | NA | NA | NA | NA | NA | NA | NA | N/A | E26 | N/A | 50 |
| 17030Q                        | 30 Watt Circline Ballast | 30 | NA | NA | NA | NA | NA | NA | NA | NA | N/A | E26 | N/A | 50 |
| 17040Q2                       | 40 Watt Circline Ballast | 40 | NA | NA | NA | NA | NA | NA | NA | NA | N/A | E26 | N/A | 50 |
| 4001                          | 40 Watt Circline Ballast | 40 | NA | NA | NA | NA | NA | NA | NA | NA | N/A | E26 | N/A | 50 |



Add suffix "Q" for Snap-in Version.  
Item #4001 for Hard-wire base only.

| Item Number                    | Item Description    | Unit/Ballast Watts | Incandescent Comparison (Watts) | Initial Lumens | CCT (Kelvin) | CRI | MOL/Height (inches) | Diameter/Width (inches) | Input Line | Base Type | Case Quantity |
|--------------------------------|---------------------|--------------------|---------------------------------|----------------|--------------|-----|---------------------|-------------------------|------------|-----------|---------------|
| <b>10,000 HOUR GU 24 BASES</b> |                     |                    |                                 |                |              |     |                     |                         |            |           |               |
| <b>GU24 SPRINGLAMPS</b>        |                     |                    |                                 |                |              |     |                     |                         |            |           |               |
| 33113SP                        | 13 Watt SpringLamp  | 13                 | 60                              | 900            | 2700         | 82  | 3.6                 | 1.8                     | .22A       | GU24      | 12            |
| 33118SP                        | 18 Watt SpringLamp  | 18                 | 75                              | 1200           | 2700         | 82  | 3.8                 | 2.3                     | .30A       | GU24      | 12            |
| 33123SP                        | 23 Watt SpringLamp  | 23                 | 100                             | 1600           | 2700         | 82  | 4.4                 | 2.4                     | .43A       | GU24      | 12            |
| 33127SP                        | 27 Watt SpringLamp  | 27                 | 100                             | 1850           | 2700         | 82  | 4.8                 | 2.4                     | .45A       | GU24      | 12            |
| 33132SP                        | 32 Watt SpringLamp  | 32                 | 120                             | 2200           | 2700         | 82  | 5.1                 | 2.7                     | .53A       | GU24      | 12            |
| 33213SSP                       | 13 Watt Low Profile | 13                 | 60                              | 900            | 2700         | 82  | 2.3                 | 3.2                     | .22A       | GU24      | 12            |





# EXIT AND EMERGENCY



TCP is your source for universal combo emergency exit and compact polycarbonate exit signs, exit and emergency wire guards, as well as LED low profile thermoplastic emergency lights.

Both the universal combo emergency exit sign and compact polycarbonate sign come with a white housing and either red or green lettering.

| Item Number | Item Description | Voltage | Color |
|-------------|------------------|---------|-------|
|-------------|------------------|---------|-------|

## EMERGENCY LIGHTING / EXIT SIGNS

### REMOTE HEAD LIGHTS

|         |                                                       |               |       |
|---------|-------------------------------------------------------|---------------|-------|
| LEDRH1  | LED Outdoor Polycarbonate/Die-Cast Remote Single Head | 120V or 277 V | Gray  |
| LEDRH1B | LED Outdoor Polycarbonate/Die-Cast Remote Single Head | 120V or 277 V | Black |
| LEDRH2  | LED Outdoor Polycarbonate/Die-Cast Remote Double Head | 120V or 277 V | Gray  |
| LEDRH2B | LED Outdoor Polycarbonate/Die-Cast Remote Double Head | 120V or 277 V | Black |



## STANDARD EMERGENCY LIGHTS

### SELF-DIAGNOSTIC TEST

|                |                                                                 |                 |       |
|----------------|-----------------------------------------------------------------|-----------------|-------|
| LEDWELSDT      | LED Emergency Light, Self Diagnostic Test                       | Dual 120V/277 V | White |
| LEDWELRC       | LED Emergency Light Remote Capable                              | Dual 120V/277 V | White |
| LEDWELRCSDT    | LED Emergency Light, White Remote Capable, Self Diagnostic Test | Dual 120V/277 V | White |
| LEDWEL / 20760 | LED Emergency Light                                             | Dual 120V/277 V | White |



## LED EXIT SIGNS

|       |                                                         |                |             |
|-------|---------------------------------------------------------|----------------|-------------|
| 22742 | Red LED Exit Sign Universal AC Only WH Housing          | Dual 120V/277V | Red/White   |
| 22743 | Red LED Exit Sign Universal Battery Backup WH Housing   | Dual 120V/277V | Green/White |
| 22744 | Green LED Exit Sign Universal AC Only WH Housing        | Dual 120V/277V | Red/White   |
| 22745 | Green LED Exit Sign Universal Battery Backup WH Housing | Dual 120V/277V | Green/White |



## LED DIECAST EXIT SIGNS

|       |                                                            |                |           |
|-------|------------------------------------------------------------|----------------|-----------|
| 26D90 | Diecast Exit Sign, Red Letters, Single Face, White Housing | Dual 120V/277V | Red/White |
|-------|------------------------------------------------------------|----------------|-----------|



| Item Number | Item Description | Voltage | Lamp Watts |
|-------------|------------------|---------|------------|
|-------------|------------------|---------|------------|

### LED COMBO EXIT SIGNS



|          |                                                                    |                 |   |
|----------|--------------------------------------------------------------------|-----------------|---|
| LED20723 | Universal Combo Emergency Exit Sign White Housing w/ Red Lettering | Duel 120V/277 V | 3 |
|----------|--------------------------------------------------------------------|-----------------|---|



|          |                                                                                     |                 |   |
|----------|-------------------------------------------------------------------------------------|-----------------|---|
| LED20784 | Universal Combo Emergency Exit Sign White Housing w/ Red Lettering - Remote Capable | Duel 120V/277 V | 3 |
|----------|-------------------------------------------------------------------------------------|-----------------|---|



|          |                                                                                       |                 |   |
|----------|---------------------------------------------------------------------------------------|-----------------|---|
| LED20785 | Universal Combo Emergency Exit Sign White Housing w/ Green Lettering - Remote Capable | Duel 120V/277 V | 3 |
|----------|---------------------------------------------------------------------------------------|-----------------|---|



|       |                                                                          |                 |   |
|-------|--------------------------------------------------------------------------|-----------------|---|
| 20786 | Low Profile LED Combo Emergency Exit Sign, White Housing w Red Lettering | Duel 120V/277 V | 1 |
|-------|--------------------------------------------------------------------------|-----------------|---|



|       |                                                                            |                 |   |
|-------|----------------------------------------------------------------------------|-----------------|---|
| 20787 | Low Profile LED Combo Emergency Exit Sign, White Housing w Green Lettering | Duel 120V/277 V | 1 |
|-------|----------------------------------------------------------------------------|-----------------|---|

### EXIT SIGN LED RETROFITS



|       |                                               |     |    |
|-------|-----------------------------------------------|-----|----|
| 20715 | Red LED Candelabra Base Retrofit Kit, 2 Adapt | 20V | .2 |
|-------|-----------------------------------------------|-----|----|



|       |                                 |           |     |
|-------|---------------------------------|-----------|-----|
| 20716 | Red Hardwire LED Kit 120 / 277V | 120V/277V | 1.2 |
|-------|---------------------------------|-----------|-----|



|       |                                                 |      |    |
|-------|-------------------------------------------------|------|----|
| 20717 | Green LED Candelabra Base Retrofit Kit, 2 Adapt | 120V | .7 |
|-------|-------------------------------------------------|------|----|



|       |                                   |           |    |
|-------|-----------------------------------|-----------|----|
| 20718 | Green Hardwire LED Kit 120 / 277V | 120V/277V | .7 |
|-------|-----------------------------------|-----------|----|



|       |                                                  |      |     |
|-------|--------------------------------------------------|------|-----|
| 20719 | White LED Candelabra Base Retrofit Kit, 2 Adapt. | 120V | 1.7 |
|-------|--------------------------------------------------|------|-----|



|       |                                   |           |     |
|-------|-----------------------------------|-----------|-----|
| 20721 | White Hardwire LED Kit 120 / 277V | 120V/277V | 1.8 |
|-------|-----------------------------------|-----------|-----|

### BATTERIES



|       |                          |      |     |
|-------|--------------------------|------|-----|
| 20730 | NICD Battery 4.8V 650MAH | 4.8V | N/A |
|-------|--------------------------|------|-----|



|       |                               |    |     |
|-------|-------------------------------|----|-----|
| 20734 | Lead Acid Battery 6V 4.5AH IN | 6V | N/A |
|-------|-------------------------------|----|-----|

### WIRE GUARDS



|            |                                          |   |   |
|------------|------------------------------------------|---|---|
| STANDARDWG | Wire Guard for Exit and Emergency Lights | - | - |
|------------|------------------------------------------|---|---|



|         |                  |   |   |
|---------|------------------|---|---|
| COMBOWG | Combo Wire Guard | - | - |
|---------|------------------|---|---|

# Product info, right at your fingertips!

Now you can go Digital with TCP.



Our new Sales App is all about access and ease for our customers and distributors. Check inventory, inquire about availability, and learn more about our wide range of products right on your Smartphone.

Search for "TCP-Sales" in your favorite App Store, download the App today and get started immediately.

At TCP, We Know Light™.

# TECHNOLOGY CAST IN A BEAUTIFUL LIGHT

For more information on the quality and care that TCP® can deliver, call us at  
800.324.1496 or visit [tcp.com](http://tcp.com)

325 Campus Drive | Aurora, Ohio 44202 | P: 800.324.1496 | F: 877.487.0516