


# Nylon Straight and 90° Grip-Seals®

- UL Listed
  - CSA
  - RoHS Compliant
  - Suitable for Use in Hazardous Locations per Class I, Div. 2, Class II, Div. 1 & 2, and Class III, Div. 1 & 2
- Liquid Tight Seal
  - Strain Relief
  - Corrosion Resistant
  - Straight and 90° Configurations

Each Grip-Seal® package includes the grip-seal body, O-ring and locking nut. Our nylon friction ring provides uniform compression for a proper seal. It prevents bushing damage and results in a tight, uniform seal on the cord surface which seals out oil, chemicals and other contaminants.

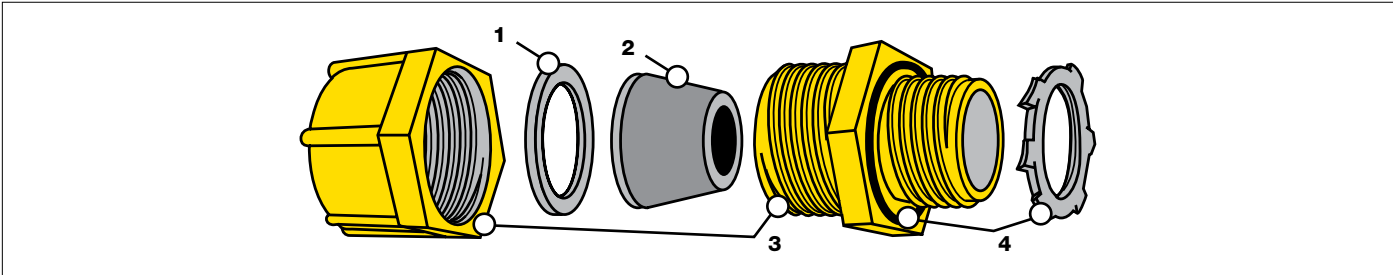

## FEATURES & BENEFITS

- 1. NYLON FRICTION RING** — Provides uniform compression for a proper seal. Prevents bushing damage and results in a tight, uniform seal on the cord surface.

**2. MULTIPLE SYNTHETIC SEALING BUSHINGS INCLUDED WITH EACH PRODUCT** — One part number covers a variety of cord diameters. Seals out water, oil, metal particles and other contaminants.
- 3. SECURITY YELLOW NYLON COMPRESSION NUT AND THREADED BODY** — Resists impact and corrosion. Provides exceptional gripping strength. Easy to remove and reuse.

**4. SEALING O-RING** — Seals out oil, chemicals and other contaminants.

## ORDERING INFORMATION (MINIMUM PURCHASE MAY BE REQUIRED IF PRODUCT NOT STOCKED)

| PART NO. | CONFIGURATION | CORD DIAMETER RANGE | FITTING SIZE | NUMBER OF BUSHINGS | KNOCK-OUT DRILL SIZE |
|----------|---------------|---------------------|--------------|--------------------|----------------------|
| 55505    | Straight      | 0.180" – 0.430"     | 3/8" NPT     | 4                  | 11/16"               |
| 55513    | Straight      | 0.188" – 0.500"     | 1/2" NPT     | 5                  | 7/8"                 |
| 55516    | Straight      | 0.188" – 0.625"     | 1/2" NPT     | 7                  | 7/8"                 |
| 55535    | Straight      | 0.250" – 0.375"     | 1/2" NPT     | 2                  | 7/8"                 |
| 55515    | Straight      | 0.312" – 0.625"     | 1/2" NPT     | 5                  | 7/8"                 |
| 555180   | Straight      | 0.562" – 0.688"     | 1/2" NPT     | 5                  | 7/8"                 |
| 55530    | Straight      | 0.560" – 0.750"     | 3/4" NPT     | 2                  | 1-1/8"               |
| 555340   | Straight      | 0.562" – 0.688"     | 3/4" NPT     | 1                  | 1-1/8"               |
| 55592    | 90°           | 0.188" – 0.625"     | 1/2" NPT     | 7                  | 7/8"                 |
| 555189   | 90°           | 0.562" – 0.688"     | 1/2" NPT     | 5                  | 7/8"                 |
| 555349   | 90°           | 0.562" – 0.688"     | 3/4" NPT     | 1                  | 1-1/8"               |
| 55593    | 90°           | 0.562" – 0.750"     | 3/4" NPT     | 2                  | 1-1/8"               |