


16 AWG Quick-Connect™ Cord Sets (2-6 Pole)

• UL Recognized • cUL • IP69K Rated • RoHS Compliant • 600 V

Quick-Connects™ make replacement of electrical and electronic control devices quick and simple. Plug sets are made with Super-Trex® SOO Ultra-Gard® Portable Cord. A superior first-line of defense against tearing, abrasion, impact, oil, ozone and most chemicals; also flame and heat resistant and offers extreme all-weather flexibility too. The molded and keyed, vulcanized thermoset cordset provides rapid and secure connect and disconnect and ensures a water, oil and dust tight seal.

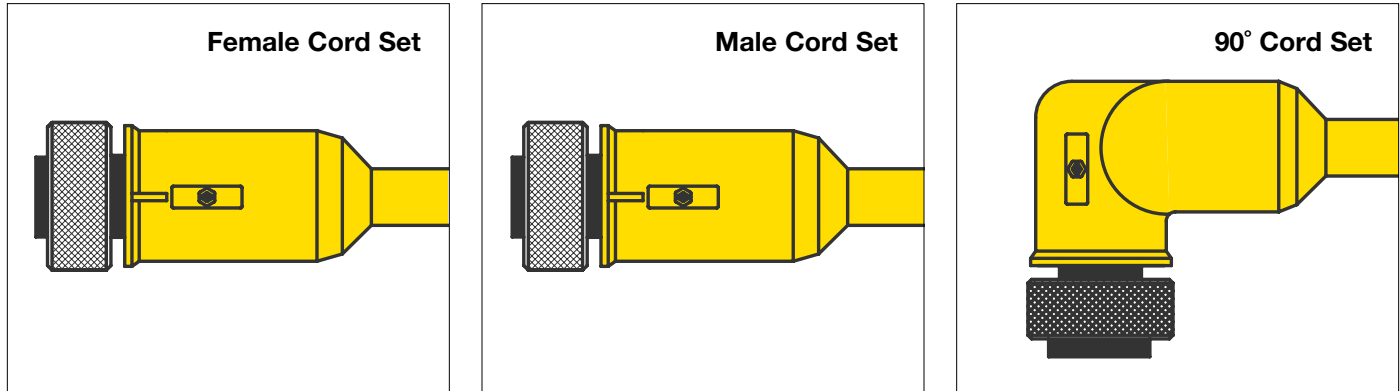

FEATURES & BENEFITS

1. PLUG SETS MADE WITH SUPER-TREX® TYPE S00 ULTRA-GARD® PORTABLE CORD, RATED 90°C

— Superior first-line defense against tearing, abrasion, impact, oil, ozone and most chemicals. Flame and heat resistant. Extreme all-weather flexibility.

2. EXTRA LONG PLUG BODY IS SPECIALLY COMPOUNDED, THERMOSET ELASTOMER — Provides long flex life, resists heat and oil deterioration.

3. SOLID BRASS CONTACT PINS ARE NICKEL COATED AND GOLD PLATED, MACHINE CRIMPED TO CONDUCTORS — Provides long life, resists corrosion, easy positive engagement. Excellent for high/low voltage and low level signal applications.

4. EXTRA LONG GROUNDING PIN — Ensures first-in, last-out contact for safety.

5. STAINLESS STEEL FRICTION RING BETWEEN COUPLER AND PLUG BODY — Increases pull-out strength, ensures uniform tightness.

6. UNIQUE STAINLESS STEEL SLEEVE OVER THE GOLD PLATED FEMALE PINS — Prevents pin deformation resulting in loss of signal and electrical continuity. Superior performance in high vibration and continuous motion environments. Probe proof.

7. MOLDED AND KEYED, VULCANIZED THERMOSET ASSEMBLY — Provides rapid and secure connect and disconnect. Ensures a water, oil, and dust tight seal.

8. HARD COATED MIL SPEC. ANODIZED ALUMINUM KNURLED COUPLING RING — Resists corrosion, provides quick and secure assembly.

9. SHELL SIZE — A (7/8"), B (1"), C (1-1/8") and D (1.5").

ORDERING INFORMATION (MINIMUM PURCHASE MAY BE REQUIRED IF PRODUCT NOT STOCKED)

FEMALE PLUGS							
PART NO.					FEET	METERS	DESCRIPTION
2 POLE	3 POLE	4 POLE	5 POLE	6 POLE			
84203	84303	84403	84503	—	3	0.91	F Plug
84206	84306	84406	84506	84166	6	1.83	F Plug
84212	84312	84412	84512	84172	12	3.66	F Plug
84220	84320	84420	84520	84190	20	6.10	F Plug

MALE PLUGS							
PART NO.					FEET	METERS	DESCRIPTION
2 POLE	3 POLE	4 POLE	5 POLE	6 POLE			
84003	84803	84703	84603	—	3	0.91	M Plug
84006	84806	84706	84606	84266	6	1.83	M Plug
84012	84812	84712	84612	84272	12	3.66	M Plug
84020	84820	84720	84620	84290	20	6.10	M Plug

Mini Quick-Connects™
Micro Quick-Connects™
Nano Quick-Connects™
Specialty Quick-Connects™
Ethernet Cable Assemblies
7 Pin Molded Valve Plug
DIN Connectors
Extension Cords
M23 Connector Assemblies
Military Connectors
Rectangular Connectors


16 AWG Quick-Connect™ Cord Sets (2-6 Pole) *(Continued)*

ORDERING INFORMATION *(MINIMUM PURCHASE MAY BE REQUIRED IF PRODUCT NOT STOCKED)*

90° FEMALE PLUGS							
PART NO.				FEET	METERS	DESCRIPTION	
3 POLE	4 POLE	5 POLE	6 POLE				
89303	89403	89503	CL16D09F003	3	0.91	90° F Plug	
89306	89406	89506	CL16D09F006	6	1.83	90° F Plug	
89312	89412	89512	CL16D09F012	12	3.66	90° F Plug	
89320	89420	89520	CL16D09F020	20	6.10	90° F Plug	

MALE / FEMALE EXTENSION SET							
PART NO.					FEET	METERS	DESCRIPTION
2 POLE	3 POLE	4 POLE	5 POLE	6 POLE			
84921	84901	84935	84968	84953	3	0.91	M/F
84922	84902	84936	84969	84954	6	1.83	M/F
84923	84903	84937	84970	84955	12	3.66	M/F
84929	84909	84919	84979	84956	20	6.10	M/F

DIMENSIONAL INFORMATION

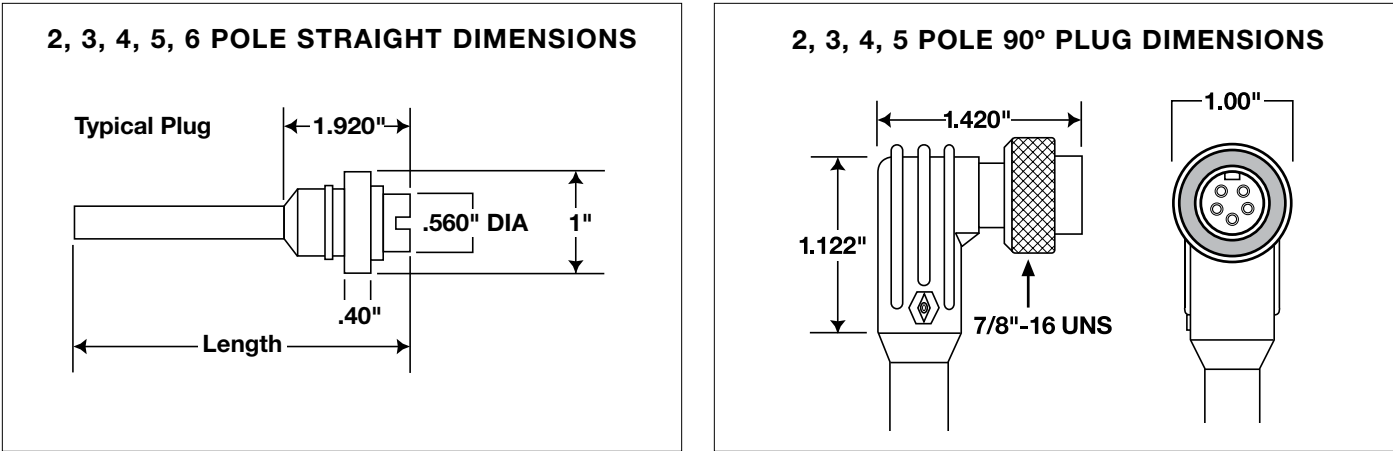

FACE VIEW OF FEMALE CONNECTORS "A" SIZE (7/8"-16 COUPLING THREAD)

2 POLE 1. White 2. Black	3 POLE 1. Green 2. Black 3. White	4 POLE 1. Black 2. White 3. Red 4. Green	5 POLE 1. White 2. Red 3. Green 4. Orange 5. Black	6 POLE A Size 1. White 2. Red 3. Green 4. Orange 5. Black 6. Blue
--	---	--	--	---